

UTILITY PATENT APPLICATION TRANSMITTAL (Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
RRR-00-007US

Total Pages in this Submission
139

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

SOFTWARE AND METHOD FOR AUTOMATICALLY FETCHING DESIRED DATA FROM EACH OF A PLURALITY OF INDEPENDENTLY-OPERATED DATA SOURCES

and invented by:

Richard R. REISMAN

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

☒ **Continuation** ☐ **Divisional** ☐ **Continuation-in-part (CIP)** of prior application No.: 08/641,010

Which is a:

☐ **Continuation** ☐ **Divisional** ☒ **Continuation-in-part (CIP)** of prior application No.: 08/251,724

Which is a:

☐ **Continuation** ☐ **Divisional** ☐ **Continuation-in-part (CIP)** of prior application No.: _____

Enclosed are:

Application Elements

1. ☐ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 120 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☒ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
RRR-00-007US

Total Pages in this Submission
139

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
a. ☐ Formal b. ☒ Informal Number of Sheets 11
4. ☒ Oath or Declaration
a. ☒ Newly executed *(original or copy)* ☐ Unexecuted
b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
c. ☒ With Power of Attorney ☐ Without Power of Attorney
d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche
7. ☐ Genetic Sequence Submission *(if applicable, all must be included)*
a. ☐ Paper Copy
b. ☐ Computer Readable Copy
c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers *(cover sheet & documents)*
9. ☐ 37 CFR 3.73(b) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing
☐ First Class ☐ Express Mail *(Specify Label No.):* _____

UTILITY PATENT APPLICATION TRANSMITTAL (Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
RRR-00-007US

Total Pages in this Submission
139

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☒ Small Entity Statement(s) - Specify Number of Statements Submitted: 2
17. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	115	- 20 =	95	x \$9.00	\$855.00
Indep. Claims	6	- 3 =	3	x \$39.00	\$117.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$345.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$1,317.00

- ☐ A check in the amount of _____ to cover the filing fee is enclosed.
- ☐ The Commissioner is hereby authorized to charge and credit Deposit Account No. _____ as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
 - ☐ Credit any overpayment.
 - ☐ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
 - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: 04/20/2000



Signature

Raymond H. J. Powell, Jr.
Registration No. 34,231

cc:

000240" 29095560

Under the Trademark Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid control number.

**STATEMENT CLAIMING SMALL ENTITY STATUS
 (37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN**

Docket Number (Optional)
RRR-00-007US

Applicant, Patentee, or Identifier: **Teleshuttle Corp.**

Application or Patent No.: **New Application**

Filed or issued: **New Application**

Title: **SOFTWARE AND METHOD FOR AUTOMATICALLY FETCHING DATA
 FROM A PLURALITY OF INDEPENDENTLY-OPERATED DATA SOURCES**

I hereby state that I am:

- ☒ the owner of the small business concern identified below;
☐ an official of the small business concern empowered to act on behalf of the concern identified below;

NAME OF SMALL BUSINESS CONCERN **Teleshuttle Corp.**

ADDRESS OF SMALL BUSINESS CONCERN **20 East 9th St., New York, NY, 10003**

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 37 CFR Part 1.21 for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time, or temporary basis during each of the pay periods of the fiscal year; and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above;
☐ the application identified above;
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

- Each person, concern, or organization having any rights in the invention is listed below:
☒ no such person, concern, or organization exists;
☐ each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING **Richard R. Reisman**

TITLE OF PERSON IF OTHER THAN OWNER

ADDRESS OF PERSON SIGNING **20 East 9th St., 14K, New York, NY, 10003**

SIGNATURE

RRR

DATE

4/10/00

**SOFTWARE AND METHOD FOR AUTOMATICALLY FETCHING DESIRED DATA
FROM EACH OF A PLURALITY OF INDEPENDENTLY-OPERATED DATA
SOURCES**

LIST OF RELATED APPLICATIONS

This is a combined Continuation of U.S. Appln. Serial No. 08/641,010, filed on April 29, 1996, and entitled "COMPUTER-IMPLEMENTED TRANSPORT OF ELECTRONIC INFORMATION OBJECTS," which is a Continuation-in-Part of U.S. Appln. Serial No. 08/251,724, filed on May 31, 1994, and entitled "SYSTEM FOR AUTOMATIC UNATTENDED ELECTRONIC INFORMATION TRANSPORT BETWEEN A SERVER AND A CLIENT BY A VENDOR PROVIDED TRANSPORT SOFTWARE WITH A MANIFEST LIST," which is U.S. Patent No. 5,694,546 on December 2, 1997, and U.S. Appln. Serial No. 08/982,157, filed on December 1, 1997, and entitled "COMPUTER-IMPLEMENTED TRANSPORT OF ELECTRONIC INFORMATION OBJECTS," which is a Continuation of the aforementioned Serial No. 08/251,724 (U.S. Patent No. 5,694,546). All of the above-identified applications are incorporated herein by reference in their entirety.

BACKGROUND OF THE INVENTION

15 The present invention relates to computer-implemented transport of electronic information objects. More specifically, the present invention relates to software and corresponding methods for automatically fetching desired data from each of a plurality of independently-operated data sources via a non-proprietary network. A user station is also disclosed.

20 Electronic publication is an exploding industry in which thousands of new products including magazines and periodicals, software applications and utilities, video games, business, legal and financial information and databases, encyclopedias and dictionaries are purchased by millions of

customers. Commonly, such information products are replicated in computer-readable form on magnetic or optical storage diskettes and are box-packaged with printed manuals for distribution to retail stores and direct mail sales. These marketing practices are relatively expensive and involve a significant time lag of at least days or weeks to get a product into a consumer's hands once it is created.

Such costs and delays are generally acceptable for original, high value products such as collections of publications or software application, of which some examples are NEWSWEEK® Interactive CD-ROM, or disks, which provides a searchable audio-visual library of issues of NEWSWEEK magazine and CINEMANIA® CD-ROM which provides reviews and other information on newly released films. For time-sensitive, low-value updates, for example, the latest issue of Newsweek or last week's movie reviews, distribution in stored form, on physical media, is slow and the cost may exceed the value of the information in the product.

Thus, electronic transfer from a central computer server to a subscriber's computer over common carriers or wide area networks is an attractive proposition. Similar considerations apply to the distribution of software program updates, although cost and frequency of issue are not such serious constraints. A problem faced in both situations is that of incorporating the received material with the original material so that a fully integrated publication, information database or software program is obtained by the user.

Another class of electronically distributed information product comprises home shopping catalogues of mail order products distributed on optical or other digital data storage disks which may contain text, sound and images from printed catalogues or uniquely created material, for example software application demos. To applicant's knowledge and belief, available products lack any computer order placement capability, requiring orders to be placed by voice call.

Communication between remote computers, not directly interconnected by umbilical cable

or a wired network, is enabled by a wide range of hardware devices and software drivers, utilities, applications and application modules. Telephone modems that couple a computer with the telephone network are familiar devices. RF modems that couple computers into wireless networks are less familiar but are beginning to appear in consumer devices known broadly as personal information communicators (PIC's) of which personal digital assistants (PDA's) such as Apple Corp.'s NEWTON® product are a first generation. New kinds of digital communications devices can be expected to emerge as digital technology replaces analog transmission.

General-purpose, online, modem-accessed, electronic information services, such as PRODIGY, COMPUSERVE and AMERICA ONLINE (trademarks), and some Internet services, provide wide access to timely information products from a central server, but are limited and complex. They provide no means for the integration of downloaded information with information products offered on disk or CD, and provide only rudimentary facilities for local viewing and search of downloaded files.

Such online information services provide their own user interface which is generally unlike that of a disk or CD-based information product, and can be customized very little, if at all, by a publisher using the service for product distribution.

Online services are oriented to extended online sessions which require complex user interaction to navigate and find desired information objects. Initial setup and use is rendered complex by requirements related to extended session use of data networks and the frequent need to navigate across the network, and through massive data collections, to locate desired data items. General-purpose online information services do not provide a suitable medium for electronic information publishers to distribute updates, and the like, because of limited interface flexibility, because a publisher cannot expect all their customer base to be service subscribers, and because of cost and payment difficulties. Such services are centered on monolithic processes intended for national use by millions of subscribers which processes are not readily adaptable.

Online service charging mechanisms are also inflexible and inappropriate for most individual information products, requiring monthly subscription fees of \$5-10 or more, plus time charges for extended use, which are billed directly to users, after a user sign-up and credit acceptance process. Such cost mechanisms are too expensive and too complex for distribution of many products such as magazine and other low cost update products. They do not presently permit a publisher to build an access fee into a purchase price or a product subscription.

Recent press announcements from corporations such as AT&T, Lotus, Microsoft and MCI describe plans for new online services providing what are called "groupware" services to offer rich electronic mail and group collaboration functions, primarily for business organizations. Although offering multiple electronic object transport operations such services are believed to have complex setup procedures and software requirements and complex message routing features and protocols, and to lack interface flexibility. Accordingly, they are not suitable for mass distribution of low cost electronic information update products and cannot achieve the objectives of the invention.

Communications Products

Many software products exist that enable one computer to communicate with another over a remote link such as a telephone cable or the air waves, but none enables a vendor substantially to automate common carrier mass distribution of an electronic information product to a customer base employing multiple heterogeneous systems with indeterminate hardware and software configurations.

Two examples of popular such software products are Datastorm Technologies, Inc.'s PROCOMM (trademark) and CENTRAL POINT COMMUTE (trademark) from Central Point Software, Inc. which are commonly used to provide a variety of functions, including file transfers between, interactive sessions from, host-mode services from, and remote computer management of, modem-equipped personal computers wired into the telephone network.

Counterpoint Publishing's Federal Register Publications

5 Counterpoint Publishing, (Cambridge MA) in brochures available to the applicant in November 1993 offered electronic information products entitled "Daily Federal Register" and "CD Federal Register." "Daily Federal Register" includes communications software and a high-speed modem. Apparently, the communications software is a standard general purpose communications package with dialing scripts that are customized to the needs of the Federal Register products. Accordingly, the cost of a communications package license which may be as high as about \$100 at retail must be included within the product cost. Also, Counterpoint Publishing avoids the difficulties of supporting various modems by providing its own standard modem, with the product, building in a cost (about \$100-200) which renders this approach quite unsuitable for mass-market distribution of low cost electronic information update products. The resulting product is not seamless either in its appearance or its operation because the communications software is separately invoked and used, and has its own disparate look and feel to the user.

10
15
20 The "CD Federal Register" provides the Federal Register on CD-ROM at weekly intervals for \$1,950.00 and CD-ROM disks are shipped to customers as they become available. Back issues are \$125 each. Updates are provided by shipping a disk. The Federal Register is a high-value product intended for specialist, business, academic and governmental users. Distribution of updates on CD-ROM, as utilized by Counterpoint Publishing, is not a suitable method for lower value products such as a weekly news magazine, because of the associated costs. Shipping delays are a further drawback.

25 While the two product "CD Federal Register" and "Daily Federal Register" might be used together, at an additive cost, to provide a combination of archives on CD-ROM plus daily updates obtained and stored until replaced by a new CD-ROM, based on information available to the present inventor it appears that the two products must be used separately. Thus they must apparently be viewed, searched, and managed as two or more separate collections, requiring multiple steps to

perform a complete search across both collections, and requiring manual management and purging of the current collection on hard disk by the user.

Xcellenet's "REMOTWARE"®

5

Xcellenet Inc. in product brochures copyrighted 1992 and a price list dated August 16, 1993, for a "REMOTWARE"® product line, offers a range of REMOTWARE® software-only products providing electronic information distribution to and from remote nodes of a proprietary REMOTWARE® computer network intended for use within an organized, corporate or institutional data processing or management information system. The system is primarily server directed, rather than user initiated and requires an expensive program (priced at \$220.00) to run at the user's node whereas the present invention addresses consumer uses which will support costs of no more than a few dollars per node.

0956063-042000
10
14
18
22
26
30
34
38
42
46
50
54
58
62
66
70
74
78
82
86
90
94
98
102
106
110
114
118
122
126
130
134
138
142
146
150
154
158
162
166
170
174
178
182
186
190
194
198
202
206
210
214
218
222
226
230
234
238
242
246
250
254
258
262
266
270
274
278
282
286
290
294
298
302
306
310
314
318
322
326
330
334
338
342
346
350
354
358
362
366
370
374
378
382
386
390
394
398
402
406
410
414
418
422
426
430
434
438
442
446
450
454
458
462
466
470
474
478
482
486
490
494
498
502
506
510
514
518
522
526
530
534
538
542
546
550
554
558
562
566
570
574
578
582
586
590
594
598
602
606
610
614
618
622
626
630
634
638
642
646
650
654
658
662
666
670
674
678
682
686
690
694
698
702
706
710
714
718
722
726
730
734
738
742
746
750
754
758
762
766
770
774
778
782
786
790
794
798
802
806
810
814
818
822
826
830
834
838
842
846
850
854
858
862
866
870
874
878
882
886
890
894
898
902
906
910
914
918
922
926
930
934
938
942
946
950
954
958
962
966
970
974
978
982
986
990
994
998
1002
1006
1010
1014
1018
1022
1026
1030
1034
1038
1042
1046
1050
1054
1058
1062
1066
1070
1074
1078
1082
1086
1090
1094
1098
1102
1106
1110
1114
1118
1122
1126
1130
1134
1138
1142
1146
1150
1154
1158
1162
1166
1170
1174
1178
1182
1186
1190
1194
1198
1202
1206
1210
1214
1218
1222
1226
1230
1234
1238
1242
1246
1250
1254
1258
1262
1266
1270
1274
1278
1282
1286
1290
1294
1298
1302
1306
1310
1314
1318
1322
1326
1330
1334
1338
1342
1346
1350
1354
1358
1362
1366
1370
1374
1378
1382
1386
1390
1394
1398
1402
1406
1410
1414
1418
1422
1426
1430
1434
1438
1442
1446
1450
1454
1458
1462
1466
1470
1474
1478
1482
1486
1490
1494
1498
1502
1506
1510
1514
1518
1522
1526
1530
1534
1538
1542
1546
1550
1554
1558
1562
1566
1570
1574
1578
1582
1586
1590
1594
1598
1602
1606
1610
1614
1618
1622
1626
1630
1634
1638
1642
1646
1650
1654
1658
1662
1666
1670
1674
1678
1682
1686
1690
1694
1698
1702
1706
1710
1714
1718
1722
1726
1730
1734
1738
1742
1746
1750
1754
1758
1762
1766
1770
1774
1778
1782
1786
1790
1794
1798
1802
1806
1810
1814
1818
1822
1826
1830
1834
1838
1842
1846
1850
1854
1858
1862
1866
1870
1874
1878
1882
1886
1890
1894
1898
1902
1906
1910
1914
1918
1922
1926
1930
1934
1938
1942
1946
1950
1954
1958
1962
1966
1970
1974
1978
1982
1986
1990
1994
1998
2002
2006
2010
2014
2018
2022
2026
2030
2034
2038
2042
2046
2050
2054
2058
2062
2066
2070
2074
2078
2082
2086
2090
2094
2098
2102
2106
2110
2114
2118
2122
2126
2130
2134
2138
2142
2146
2150
2154
2158
2162
2166
2170
2174
2178
2182
2186
2190
2194
2198
2202
2206
2210
2214
2218
2222
2226
2230
2234
2238
2242
2246
2250
2254
2258
2262
2266
2270
2274
2278
2282
2286
2290
2294
2298
2302
2306
2310
2314
2318
2322
2326
2330
2334
2338
2342
2346
2350
2354
2358
2362
2366
2370
2374
2378
2382
2386
2390
2394
2398
2402
2406
2410
2414
2418
2422
2426
2430
2434
2438
2442
2446
2450
2454
2458
2462
2466
2470
2474
2478
2482
2486
2490
2494
2498
2502
2506
2510
2514
2518
2522
2526
2530
2534
2538
2542
2546
2550
2554
2558
2562
2566
2570
2574
2578
2582
2586
2590
2594
2598
2602
2606
2610
2614
2618
2622
2626
2630
2634
2638
2642
2646
2650
2654
2658
2662
2666
2670
2674
2678
2682
2686
2690
2694
2698
2702
2706
2710
2714
2718
2722
2726
2730
2734
2738
2742
2746
2750
2754
2758
2762
2766
2770
2774
2778
2782
2786
2790
2794
2798
2802
2806
2810
2814
2818
2822
2826
2830
2834
2838
2842
2846
2850
2854
2858
2862
2866
2870
2874
2878
2882
2886
2890
2894
2898
2902
2906
2910
2914
2918
2922
2926
2930
2934
2938
2942
2946
2950
2954
2958
2962
2966
2970
2974
2978
2982
2986
2990
2994
2998
3002
3006
3010
3014
3018
3022
3026
3030
3034
3038
3042
3046
3050
3054
3058
3062
3066
3070
3074
3078
3082
3086
3090
3094
3098
3102
3106
3110
3114
3118
3122
3126
3130
3134
3138
3142
3146
3150
3154
3158
3162
3166
3170
3174
3178
3182
3186
3190
3194
3198
3202
3206
3210
3214
3218
3222
3226
3230
3234
3238
3242
3246
3250
3254
3258
3262
3266
3270
3274
3278
3282
3286
3290
3294
3298
3302
3306
3310
3314
3318
3322
3326
3330
3334
3338
3342
3346
3350
3354
3358
3362
3366
3370
3374
3378
3382
3386
3390
3394
3398
3402
3406
3410
3414
3418
3422
3426
3430
3434
3438
3442
3446
3450
3454
3458
3462
3466
3470
3474
3478
3482
3486
3490
3494
3498
3502
3506
3510
3514
3518
3522
3526
3530
3534
3538
3542
3546
3550
3554
3558
3562
3566
3570
3574
3578
3582
3586
3590
3594
3598
3602
3606
3610
3614
3618
3622
3626
3630
3634
3638
3642
3646
3650
3654
3658
3662
3666
3670
3674
3678
3682
3686
3690
3694
3698
3702
3706
3710
3714
3718
3722
3726
3730
3734
3738
3742
3746
3750
3754
3758
3762
3766
3770
3774
3778
3782
3786
3790
3794
3798
3802
3806
3810
3814
3818
3822
3826
3830
3834
3838
3842
3846
3850
3854
3858
3862
3866
3870
3874
3878
3882
3886
3890
3894
3898
3902
3906
3910
3914
3918
3922
3926
3930
3934
3938
3942
3946
3950
3954
3958
3962
3966
3970
3974
3978
3982
3986
3990
3994
3998
4002
4006
4010
4014
4018
4022
4026
4030
4034
4038
4042
4046
4050
4054
4058
4062
4066
4070
4074
4078
4082
4086
4090
4094
4098
4102
4106
4110
4114
4118
4122
4126
4130
4134
4138
4142
4146
4150
4154
4158
4162
4166
4170
4174
4178
4182
4186
4190
4194
4198
4202
4206
4210
4214
4218
4222
4226
4230
4234
4238
4242
4246
4250
4254
4258
4262
4266
4270
4274
4278
4282
4286
4290
4294
4298
4302
4306
4310
4314
4318
4322
4326
4330
4334
4338
4342
4346
4350
4354
4358
4362
4366
4370
4374
4378
4382
4386
4390
4394
4398
4402
4406
4410
4414
4418
4422
4426
4430
4434
4438
4442
4446
4450
4454
4458
4462
4466
4470
4474
4478
4482
4486
4490
4494
4498
4502
4506
4510
4514
4518
4522
4526
4530
4534
4538
4542
4546
4550
4554
4558
4562
4566
4570
4574
4578
4582
4586
4590
4594
4598
4602
4606
4610
4614
4618
4622
4626
4630
4634
4638
4642
4646
4650
4654
4658
4662
4666
4670
4674
4678
4682
4686
4690
4694
4698
4702
4706
4710
4714
4718
4722
4726
4730
4734
4738
4742
4746
4750
4754
4758
4762
4766
4770
4774
4778
4782
4786
4790
4794
4798
4802
4806
4810
4814
4818
4822
4826
4830
4834
4838
4842
4846
4850
4854
4858
4862
4866
4870
4874
4878
4882
4886
4890
4894
4898
4902
4906
4910
4914
4918
4922
4926
4930
4934
4938
4942
4946
4950
4954
4958
4962
4966
4970
4974
4978
4982
4986
4990
4994
4998
5002
5006
5010
5014
5018
5022
5026
5030
5034
5038
5042
5046
5050
5054
5058
5062
5066
5070
5074
5078
5082
5086
5090
5094
5098
5102
5106
5110
5114
5118
5122
5126
5130
5134
5138
5142
5146
5150
5154
5158
5162
5166
5170
5174
5178
5182
5186
5190
5194
5198
5202
5206
5210
5214
5218
5222
5226
5230
5234
5238
5242
5246
5250
5254
5258
5262
5266
5270
5274
5278
5282
5286
5290
5294
5298
5302
5306
5310
5314
5318
5322
5326
5330
5334
5338
5342
5346
5350
5354
5358
5362
5366
5370
5374
5378
5382
5386
5390
5394
5398
5402
5406
5410
5414
5418
5422
5426
5430
5434
5438
5442
5446
5450
5454
5458
5462
5466
5470
5474
5478
5482
5486
5490
5494
5498
5502
5506
5510
5514
5518
5522
5526
5530
5534
5538
5542
5546
5550
5554
5558
5562
5566
5570
5574
5578
5582
5586
5590
5594
5598
5602
5606
5610
5614
5618
5622
5626
5630
5634
5638
5642
5646
5650
5654
5658
5662
5666
5670
5674
5678
5682
5686
5690
5694
5698
5702
5706
5710
5714
5718
5722
5726
5730
5734
5738
5742
5746
5750
5754
5758
5762
5766
5770
5774
5778
5782
5786
5790
5794
5798
5802
5806
5810
5814
5818
5822
5826
5830
5834
5838
5842
5846
5850
5854
5858
5862
5866
5870
5874
5878
5882
5886
5890
5894
5898
5902
5906
5910
5914
5918
5922
5926
5930
5934
5938
5942
5946
5950
5954
5958
5962
5966
5970
5974
5978
5982
5986
5990
5994
5998
6002
6006
6010
6014
6018
6022
6026
6030
6034
6038
6042
6046
6050
6054
6058
6062
6066
6070
6074
6078
6082
6086
6090
6094
6098
6102
6106
6110
6114
6118
6122
6126
6130
6134
6138
6142
6146
6150
6154
6158
6162
6166
6170
6174
6178
6182
6186
6190
6194
6198
6202
6206
6210
6214
6218
6222
6226
6230
6234
6238
6242
6246
6250
6254
6258
6262
6266
6270
6274
6278
6282
6286
6290
6294
6298
6302
6306
6310
6314
6318
6322
6326
6330
6334
6338
6342
6346
6350
6354
6358
6362
6366
6370
6374
6378
6382
6386
6390
6394
6398
6402
6406
6410
6414
6418
6422
6426
6430
6434
6438
6442
6446
6450
6454
6458
6462
6466
6470
6474
6478
6482
6486
6490
6494
6498
6502
6506
6510
6514
6518
6522
6526
6530
6534
6538
6542
6546
6550
6554
6558
6562
6566
6570
6574
6578
6582
6586
6590
6594
6598
6602
6606
6610
6614
6618
6622
6626
6630
6634
6638
6642
6646
6650
6654
6658
6662
6666
6670
6674
6678
6682
6686
6690
6694
6698
6702
6706
6710
6714
6718
6722
6726
6730
6734
6738
6742
6746
6750
6754
6758
6762
6766
6770
6774
6778
6782
6786
6790
6794
6798
6802
6806
6810
6814
6818
6822
6826
6830
6834
6838
6842
6846
6850
6854
6858
6862
6866
6870
6874
6878
6882
6886
6890
6894
6898
6902
6906
6910
6914
6918
6922
6926
6930
6934
6938
6942
6946
6950
6954
6958
6962
6966
6970
6974
6978
6982
6986
6990
6994
6998
7002
7006
7010
7014
7018
7022
7026
7030
7034
7038
7042
7046
7050
7054
7058
7062
7066
7070
7074
7078
7082
7086
7090
7094
7098
7102
7106
7110
7114
7118
7122
7126
7130
7134
7138
7142
7146
7150
7154
7158
7162
7166
7170
7174
7178
7182
7186
7190
7194
7198
7202
7206
7210
7214
7218
7222
7226
7230
7234
7238
7242
7246
7250
7254
7258
7262
7266
7270
7274
7278
7282
7286
7290
7294
7298
7302
7306
7310
7314
7318
7322
7326
7330
7334
7338
7342
7346
7350
7354
7358
7362
7366
7370
7374
7378
7382
7386
7390
7394
7398
7402
7406
7410
7414
7418
7422
7426
7430
7434
7438
7442
7446
7450
7454
7458
7462
7466
7470
7474
7478
7482
7486
7490
7494
7498
7502
7506
7510
7514
7518
7522
7526
7530
7534
7538
7542
7546
7550
7554
7558
7562
7566
7570
7574
7578
7582
7586
7590
7594
7598
7602
7606
7610
7614
7618
7622
7626
7630
7634
7638
7642
7646
7650
7654
7658
7662
7666
7670
7674
7678
7682
7686
7690
7694
7698
7702
7706
7710
7714
7718
7722
7726
7730
7734
7738
7742
7746
7750
7754
7758
7762
7766
7770
7774
7778
7782
7786
7790
7794
7798
7802
7806
7810
7814
7818
7822
7826
7830
7834
7838
7842
7846
7850
7854
7858
7862
7866
7870
7874
7878
7882
7886
7890
7894
7898
7902
7906
7910
7914
7918
7922
7926
7930
7934
7938
7942
7946
7950
7954
7958
7962
7966
7970
7974
7978
7982
7986
7990
7994
7998
8002
8006
8010
8014
8018
8022
8026
8030
8034
8038
8042
8046
8050
8054
8058
8062
8066
8070
8074
8078
8082
8086
8090
8094
8098
8102
8106
8110
8114
8118
8122
8126
8130
8134
8138
8142
8146
8150
8154
8158
8162
8166
8170
81

consumer or open commercial environment, and bring the drawbacks of complexity, cost, and program size, which may put undesirable operational constraints on the user (and perhaps even compromise the user's privacy). REMOTEWARE® is too costly and complex for mass distribution of updates to periodicals, cannot be shipped invisibly with an electronic information product and requires specialized server software and operations support that would challenge all but the largest and most technically sophisticated publishers. Accordingly, REMOTEWARE® is unsuitable for widespread use as an economical means of distributing updates for a variety of electronic information products.

Although it has wider applications, a significant problem addressed by the invention is the problem of economically distributing updates of electronic information products to a wide customer base that may number tens or hundreds of thousands, and in some cases, millions of consumers. At the date of this invention, such a customer base will normally include an extensive variety of computers, operating systems and communications devices, if the latter are present, all of which may have their own protocols and configuration requirements.

While an electronic information product vendor might consider licensing or purchasing an existing commercial communications product for distribution with their publication product to enable remote, diskless updating, the high cost of such a solution would generally be unacceptable because a communication package includes a broad range of functionalities not required for the vendor's particular purpose, for example, remote keyboarding. Significantly, a commercial communications package is not susceptible to customization of its user interface and may have its own configuration requirements and installation requirements, with regard to directories, device drivers and the like, which are incompatible with other vendor or user requirements or are simply a nuisance to the user. Thus, a commercial communications product in addition to its cost, cannot be satisfactorily integrated with an information product.

There is accordingly a need for computer-implementable information transport software to

enable simple, economical and prompt mass distribution of electronic information products.

SUMMARY OF THE INVENTION

5 This invention solves a problem. It solves the problem of enabling simple, economical and prompt mass distribution of electronic information products.

10 In one aspect, the present invention provides a method for controlling a user station configured for communications with a multiplicity of independently-operated data sources via a non-proprietary network. Advantageously, the method includes steps for providing a user interface to enable a user at the user station to select multiple ones of the multiplicity of independently-operated data object sources to be polled; automatically polling each of the selected data object sources in order to determine availability of desired data at each of the selected data object sources; and automatically transporting desired data determined to be available from each of the selected data object sources to the user station.

15 According to another aspect, the present invention provides a method for controlling a user station configured for communications with a multiplicity of independently-operated data sources via a non-proprietary network, including steps for providing a user interface to enable a user at the user station to select multiple ones of the multiplicity of independently-operated data object sources; automatically effecting respective communication sessions with each of the selected data object sources; and automatically fetching desired data from each of the selected data object sources during each of the respective communication sessions.

20 According to another aspect, the present invention provides software stored on a computer-readable storage medium at a user station configured for communications with a multiplicity of independently-operated data sources via a non-proprietary network. Preferably, the software provides a plurality of functions including an interface function that provides a user interface to

enable a user at the user station to select multiple ones of the multiplicity of independently-operated data object sources to be polled; a polling function that automatically polls each of the selected data object sources in order to determine availability of desired data at each of the selected data object sources; and a transport function that automatically transports desired data determined to be available from each of the selected data object sources to the user station.

According to another aspect, the present invention provides software stored on a computer-readable storage medium at a user station configured for communications with a multiplicity of independently-operated data sources via a non-proprietary network. Preferably, the software provides a plurality of functions including an interface function that provides a user interface to enable a user at the user station to select multiple ones of the multiplicity of independently-operated data object sources; a communication function that automatically effects respective communication sessions with each of the selected data object sources; and a fetch function that automatically fetches desired data from each of the selected data object sources during each of the respective communication sessions.

According to another aspect, the present invention provides a user station configured for communications with a multiplicity of independently-operated data sources via a non-proprietary network, including a device for providing a user interface to enable a user at the user station to select multiple ones of the multiplicity of independently-operated data object sources to be polled; another device for automatically polling each of the selected data object sources in order to determine availability of desired data at each of the selected data object sources; and a third device for automatically transporting desired data determined to be available from each of the selected data object sources to the user station.

According to another aspect, the present invention provides a user station configured for communications with a multiplicity of independently-operated data sources via a non-proprietary network, including a first device which provides a user interface to enable a user at the user station

to select multiple ones of the multiplicity of independently-operated data object sources; a second device which automatically effects respective communication sessions with each of the selected data object sources; and a third device which automatically fetches desired data from each of the selected data object sources during each of the respective communication sessions.

5

BRIEF DESCRIPTION OF THE DRAWINGS

One way of carrying out the invention is described in detail below with reference to drawings which illustrate only one specific embodiment of the invention and in which:

Figure 1 is a schematic diagram of one embodiment of an information transport software component according to the invention installed in a computer workstation and communicating with a complementary centrally located server-resident software module for mass distribution of digitized electronic information objects;

Figure 2 is a flow block diagram of an information transport operation performed by the software component and module of the embodiment of Figure 1;

Figure 3 is a schematic diagram of a server-based electronic distribution service employing an inventive information transport software component;

Figure 4 is a further schematic diagram of the service illustrated in Figure 3;

Figure 5 is a schematic diagram of a prior art communications product employed to transport an information object between a user and a remote server;

Figure 6 is a schematic diagram similar to Figure 5 showing, in a comparative manner, some of the benefits that can flow to a user when an information transport software component, such as that described with reference to Figure 1, is used for a similar transport operation;

Figure 7 is a schematic diagram of a basic object retrieval embodiment of the invention;

Figure 8 is a schematic diagram of a product-integrated interface embodiment of the invention;

Figure 9 is a schematic diagram of a server-enhanced embodiment of the invention;

Figure 10 is a schematic diagram of an embodiment of the invention providing update

objects via a commercial service;

Figure 11 is a schematic diagram of a multiple service routes embodiment of the invention;

Figure 12 is a schematic diagram of an offline Web browser embodiment of the invention;

and

Figure 13 is a schematic flow diagram of a hyperlink readdressing or redirection process according to the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Figure 1, the inventive software component is schematically shown in operative mode installed at a user's computer workstation. The workstation is communications-equipped for communication with remote services, for example by modem, which services are also shown schematically. Only relevant software and hardware components of the system are shown.

Relevant components at the workstation comprise operating system services 10, a containing information product 12, an information transport component or module 14, herein also referenced as a "transporter" which may be a stand-alone product or, in preferred embodiments is embedded or contained in the containing information product 12. Information transport component 14 provides a general purpose facility for sending and fetching information objects between an end user's computer (the client) and a central server. Information transport component 14 is not customized to the containing information product 12, but is intended to be used in conjunction with any of a wide range of electronic information products.

Operating system services 10 provide capabilities for the containing information product 12 and the information transport component 14 to access a readable information storage device 16 which may, for example, be an optical disk drive such as a read-only CD-ROM where product information 17 is stored. In addition, a read/write information storage device 18, for example, a

conventional hard disk is accessed via the operating system services 10 for storage of a fetched additional information object 26. The storage media used for hard disks and the like are often described as nonvolatile and the type of storage is frequently referenced as "permanent." however, the more recently used term "persistent storage," which references the manner of storage as well as the physical storage media and distinguishes from transient storage where objects may be automatically erased after some interval, or event, without supervisory control or awareness of the erasure, is a more suitable descriptive term for the purposes of the present invention.

As necessary, different, or modified, information transporter components 14 can be supplied for users of different operating systems or system families, notably DOS (available in several versions, for example from Microsoft Corp, IBM Corporation, Novell, Inc.) Windows (trademark, Microsoft Corp.), Apple Computer Corp.'s operating systems, possibly IBM Corporation's OS/2 (trademark), and any distinct operating systems developed for personal digital assistants, pen-based computers and the like.

Information transport component 14 also uses operating system services 10 for external communication with a communications network 20 through which the information transport component 14 can access a remote server 22, or server-client network, supporting a data storage device 24 where desired additional information object 26 is located.

Communications network 20 can be any electronic distribution system suitable for transporting information objects 26 including wired and wireless common carriers such as telephone networks, cable television systems or networks and mobile telecommunications or data communications networks and extends also to emerging and future systems of providing electronic communication between users of diversified equipment. The term "common carrier" is used herein to embrace all such data communication systems as will reasonably meet the purposes of the invention. The term "modem" is used herein to embrace any network interface device enabling a user station to communicate on such a communications network 20.

5

While the containing information product 12 can take many different forms, as described herein, and as will also be apparent to those skilled in the art, a preferred embodiment is that of a periodically issuing publication or publications, for example, a news magazine or a collection of patents. Again, the additional information object 26 could be any information of interest to the user, having some relevance to the containing information product 12, but the invention and its unique capabilities enable the additional information object 24 to be fully integrated with the containing product 12 in a manner that can be automated to be transparent to the user.

10

The inventive information transport component 14 is designed to require a minimum of user input. A bare minimum will be a user's ID which can be entered by the user in a product setup and automatically accessed for information transport, or could be pre-loaded by the vendor from data supplied by the user at purchase.

15

A product ID is preferably pre-loaded into the containing information product 12 by the information product vendor or publisher to be available for use by the information transport component 14. However, even this may not be required. In an alternative embodiment, the product ID can be automatically incorporated into the product in a product replication process that permits individualized coding of unique ID's. In most cases, a user-actuated menu selection is provided in the containing information product 12 after integration with the inventive information transport component 14 to activate transport of an additional information object, and preferably, selection of transport activation drops down a menu of transport choices such as "FETCH UPDATE", "FETCH CATALOG OF UPDATES", "SEND DATA" and the like, each of which then runs automatically upon selection.

20

25

Updating can also be totally automatic, and other than an obviously desirable user notification, be completely invisible to or transparent to the user, running in background on their system, while the user's screen is available for other processing such as running the containing information product 12. Where updates are made available on a known schedule, a totally automated

product can be provided that fetches an update without any user intervention, on the specified release date, or as soon thereafter as the user's system, or the containing information product 12, is activated. In practice, most users will probably prefer an opportunity to confirm that the fetch transaction should proceed. A preferred embodiment monitors the user's system clock and alerts a user to the arrival of an update release date and asks the user to confirm that the system should seek and fetch the scheduled update, if available.

Thus, the invention is particularly suitable for importing updates of information or information processing products, such as periodically issuing literature, or software upgrades. Accordingly, additional information object 24 preferably comprises updates which can be integrated with the information product 12 to provide, for example, a coherent body or continuous sequence of materials that can be commonly searched and indexed preferably in a manner giving the user the appearance of a common logical file formed from physically distinct files. The appearance of integration can be achieved by searching new and then old indexes in series and making the search and navigation logic of the containing product smart enough to combine new and old information. For example a new object can have an index file similar to that for the original information product 12. A search engine can first search the new index, then the old one, and then produce a combined set of results. Preferably, the files are not actually merged or otherwise combined as to do so could be unduly complex.

As shown in Figure 1, the containing information product 12 comprises a user interface 28 enabling the user to view, search, excerpt and print or otherwise export or process selected information items from product information 17. The user interface 28 provides standard information product features, as conventionally supplied by the product publisher, supplemented by appropriate fetch or send options to activate the features of the inventive information transport component 14.

Also shown in Figure 1 are a database management module 30 and a data structure definition module 32. Database management module 30 provides retrieval-oriented database processing of the

information product including indexed searching and selective retrieval capabilities using one or more index keys such as an issue or item number, or full text searching, and may provide hypertext and hypermedia linkages. The data structure definition 32 provides the database structure of relevant files as classified by field or element, name, type, size and the like. After successful completion of a fetch operation, control is returned to containing information product 12 to process the new information in essentially the same manner as the original information, or in any other manner for which it has been equipped.

Major modules comprised in the inventive information transport component 14 are a user interface 34, a communications module 36 and fetch-send protocol 38. In addition, the information transport component 14 preferably comprises its own built-in application programming interfaces (APIs) such as a user interface API 40 and a communications API 42, enabling the information transport component 14's user interface and communications modules respectively, readily to be incorporated with, or plugged into a wide range of containing information products 14. Such incorporation, in the currently best known embodiment of the invention, is effected by software engineers familiar with and having access to the containing information product 12, but future developments may enable the incorporation process to be effected by skilled users.

References herein to an applications programming interface (API) will be understood to embrace any program interconnection technique which supports direct, seamless interaction between one program and another, including procedural calls, object encapsulation, or emerging techniques like Microsoft Corp.'s Object Linking and Embedding (OLE) or Apple Computer's Open Doc.

API 40 is responsible for providing means for the user to interact with the information transport functions of the invention and interface as seen by the user and API 42 is responsible for handling internal processes of communications and data management.

The APIs 40 and 42 are intended to enable the information transport component 14 to be used

by a range of product programs controlling a variety of information products and to enable each API 40 and 42 to be free to exercise flexibility and creativity in extending its associated user interface 28, data management module 30 and database structure 32 to fully address the provision of transport functions for the purposes described herein.

5

API 42 operates on a transport function level involving high level interactions between the containing product 12 or the user (or the optional user interface) and the transporter 14 before and after communications while the detailed low-level interactions between the transporter client and the server during communications are handled by fetch-send protocol 38, without involvement of the containing product 12 or the user. "High level" is used to refer to a level at which software interacts with a user, typically in simple, readily comprehensible, function-oriented, graphic or everyday language terms, while "low-level" refers to a level of detailed procedural interaction with an operating system, or device (modem, port etc.) in obscure program or machine language terms incomprehensible to most users.

Fetch-send protocol 38 is, in the preferred embodiment shown, a component of a novel client-server communications procedure designed to manage the transaction-oriented transmissions required to achieve satisfactory transport of desired server stored information objects, and optionally, central reporting of user information in a predetermined format. Alternatively, one or more existing protocols could be used.

Preferably, the API's 40 and 42 and the fetch-send protocol 38 are structured to use a manifest list to control the exchange of information objects. The manifest list can be provided in fetch-send protocol 38, and can be forwarded to remote server 22 to provide better efficiency, error control, and management of the operation. Alternatively the manifest list may remain resident at the user's station. The manifest is valuable operating at the client station, at the API level, to specify the actions required during a transport session and can in one embodiment comprise a list of send and fetch operations which are individually controlled.

This software mechanism, employing novel communications procedures and applications interfaces that reference an object manifest, provides a new way for performing a wide variety of information exchange functions in a simple, standardized and economical manner.

API Functions:

1) Product Setup

In preferred embodiments, API 40 and API 42 include a product setup routine of an application-specific configuration, which is used by the publisher or product developer, prior to publication, to establish seamless compatibility between the containing information product 12 and the information transport component 14 for smooth execution of desired transport functions. A completion status code is also specified.

The application-specific configuration posts user and product ID information, as needed to process password or other access code authentication and posts files information, including designation of an application work directory and a transporter work directory for performing the transporter functions of information transport component 14.

Additionally, the application-specific configuration sets up an appropriate decompression (or compression for send objects) technique according to the expected format and condition of fetched information objects 46, which information is pre-coded into communications component 36.

The application-specific configuration established through API 40 selects either a standard user interface, as furnished with information transport component 14, or an application-controlled user interface. Control settings are established for connection problem handling, disk error handling, abort and server condition handling, access denial, unavailability of information object files and any other error situations which may occur during transport.

If desired, optional, advanced controls for scheduled automatic calling can be included in the application-specific configuration used in preparing the containing information product 12 for publication.

5

Preparation of containing information product 12 and incorporation of information transport component 14 therein, with an application specific configuration, as described is carried out prior to publication to build a customized, ready to run version of the product with automated update capability.

10

Communications API 42 establishes a product-specific transport method choice list for selection of an appropriate file transfer protocol as between direct dial, data network dial, and other modes of transport. Communications protocols specify necessary connection parameters such as access number and network addressing or other routing information. Optional script choices can provide for different modes of transport.

15

These product-specific configurations and protocols enable information transport component 14 to be packaged in executable form with containing information product 12, with all necessary product-specific components and settings, including a standard user interface if selected, ready for inclusion in the product package.

20

If desired, at the option of the information product publisher, a standard user interface may be included. Such an optional standard user interface can have all facilities needed to select transportable objects from a predefined list, perform all user setup functions, and invoke information object transport.

25

Additional options are standard software that would allow the user to search, view and print the transported objects totally independently of the user interface and database search components of the containing product. Both such options enable a publisher to exploit the inventive transport

product for efficiently and economically providing updates without having to make changes to the publisher's containing product, simply by configuring the transporter or information transport component 14 and physically including it, and the optional components, within the containing product.

5

A standard viewer might handle only ASCII text, but it preferably could provide for other useful formats such as standard word processor, spreadsheet or database formats, or multimedia formats such as video, sound and HTML (hypertext markup language), a format becoming popular on the Internet and which provides the ubiquitous Web pages for the Internet's World Wide Web.

API Functions:

2) User Setup

Compatibility with the user's system is effected by API 40 establishing a user-specific configuration, and creating or updating the necessary control files.

Parameters established in the user-specific configuration include a setup ID number to permit use of multiple setups, for example, for different transport options, and a product ID number.

20

The user-specific configuration posts user ID information and a password or other access code authentication and posts files information, including disk and drive designation for work and data directories. Autocall options and a completion status code are also specified.

25

API 40 provides information for communications module 36, specifying a user communications protocol for the user's hardware, operating system, line configuration, and so on. Thus, for a standard telephone connection, comm port, speed (baud rate), interrupt settings, modem type and control strings, dial prefix, dial 9, pulse or tone, call waiting shut-off, and the like are specified, as appropriate. Additionally, the user communications protocol includes access number

and connection parameters, optionally with script selection for routing choices via data networks, and so on.

The resultant user-specific configuration and communications protocols generated through API 40 create a setup ready to call and places it in the designated transporter work area. A validation procedure checks entries and reports obvious errors in parameter settings.

Preferably, multiple product ID setups are provided to enable multiple information products to use the transporter with an appropriate, compatible transporter version. Preferably also, the user-specific configuration accommodates shared use of the transporter work areas by multiple information product applications resident on the same user's system.

Mechanism of Fetch-Send Protocols 38 (User) and 44 (Server)

User fetch-send protocol 38 working in cooperation with server fetch-send protocol 44 controls the desired information object transport function, calling remote server 22 and exchanging data objects. It performs or supervises communications between the user's system and remote server 22.

Communications module 36 uses a setup ID number specified through API 40 or 42, selects which setup to use for a call, calls remote server 22 using protocol 38, and in a preferred embodiment, sends an object manifest comprising a send object list, a fetch object list or both. Such manifest is created under control of user interface 28 from a pre-existing set of choices supplied with the product or obtained during previous update operations, or both.

Alternatively fetch-send protocol 38 may refer to a pre-existing manifest list stored at the user's station, or may be directed by remote server 22 to select one of multiple pre-existing manifest lists stored at the user's station. As another alternative, although it is convenient and advantageous

to transmit the manifest list to the server 22, the relevant status and management information can simply be used locally by communications module 36 and be integrated into the individual fetch and send protocols.

5 A send object list comprises object action codes specifying the type of server action required, if any, object names, object sizes and response object size, if any. A fetch object list comprises object names, object sizes and an object availability date.

10 A completed object manifest is employed to convey the status of the transport operation and to provide for additional information transport, if desired. The completed object manifest adds the following to the request object manifest: send object additional information; object acceptance codes returned by server 22; time of acceptance; and a response object name, if called for by the object action code.

15 For a fetch operation, the completed object manifest adds the following to the request object manifest: fetch object additional information; a fetch confirmation or failure code; the time of completion or failure and a revised availability date if the requested fetch object was unavailable.

20 If a scheduled update or polling option is present and selected, a scheduling or polling indicator is included, and a completion of processing or import function to call through API 42 is specified.

25 A completion status code terminates the fetch or send operation and returns control to the information product application or the provided user interface.

Information Transport Using Communications Module 36

Communications module 36 employing the described fetch-send mechanism comprised by

cooperating protocols 38 and 44 performs the functions necessary to complete an information transport operation, as described herein, under a variety of circumstances, with tolerance for a common range of error conditions, open drives, inadequate disk space, lost line connections and the like, without losing control of the user's system. Using correct, verified ID, naming and routing information, the information transport operation employing the inventive information transport component 14 is less error-prone than many computer users would be were they effecting the transport operation with conventional technology requiring them to enter routing and storage information and the like, manually.

Communications module 36 verifies that all send objects are as specified, that all fetch objects are scheduled to be available, verifies that sufficient disk space is available for all fetch objects and for compressed transmission copies of all objects, and returns an error report if any of these requirements is not fulfilled.

Communications module 36 performs communications, then returns a completed object manifest, and logs all activity in a transporter log file. If an optional scheduling/polling feature is selected, the communication is deferred until the scheduled time.

These general objectives are achieved by carrying out the following process steps after an application (or optionally a transporter user interface) requests a transport function:

- 1) Local validation of the request returning a failure code if the request is improperly specified.
- 2) Compression of all send objects for transmission and placing them in the designated transporter work area.
- 3) Connection attempts to remote server 22, returning a failure code if necessary. Connections are made via phone line or network. The system handshakes and identifies the call to the server.
- 4) Presentation of the object manifest, if utilized, for validation and action.

- 5) On receiving a go-ahead, transport of each send object, logging each as sent, and receipt of object acceptance codes from the server and logs them, when received.
- 6) Receipt of all fetch objects from the server, placing them in the transporter work area, and logs them as received. Fetch object names may be precise, or generic or alias names may be used to request a latest installment.
- 7) Receipt and logging of a completed object manifest from the server. (If receipt of response objects is implied by the action codes, first receives a revised object manifest, and fetches the response objects, then receives the completed object manifest.)
- 8) Disconnection from server.
- 9) Decompression and unpacking of all fetch objects into application work area, and logs completion status.
- 10) Returns control to the application (or optional transporter user interface).

The product checks the completion code, and completed object manifest to deal with any error conditions. The application performs any required import processing on fetched objects to integrate the data and indexes with prior data, as desired, to enable seamless use. If desired, import processing can include, or offer as a user selection, file maintenance functions relevant to the information product including, for example, file purging to remove obsolete information files and preserve the user's storage space. Specifications of files to be deleted can be included with the original product or with a fetch object. In either event the responsibility for accurate specification is passed to the vendor, relieving the user of the risk of making erroneous deletions and anxiety attendant thereon. After such import processing the containing information product (or the optional separate user interface) then returns control to the user for use of the received data.

Those skilled in the art will appreciate that the identification of files in the object manifest, or for file maintenance functions as the user station, or for any other purpose of the invention, can be effected generically, for example by using wild card characters, as is customary in file

specification, and which effectively permits multiple objects to be specified as a class related by file name characteristics, or related individually, thereby providing options for specifying of such class of multiple objects to proceed at one time or in a series of transports over time. Other algebraical identification methods can be used which may reference object versions in series or comparable characteristics.

The foregoing steps are illustrated in the flow block diagram of Figure 2. When containing information product 12 issues an information transport call 50, setup filter 52 runs setup routine 54 if this is a first call and no information transport setup was run on installation of containing information product 12. At block 56, an object manifest is retrieved for pre-transport preparation at block 58. After prepping, a call to server 22 is established at block 60 and when the connection is made, and a handshake performed, one or more objects is transported at block 62.

After completion of transport and receipt of a completion manifest, server 22 is disconnected at block 64, received objects are decompressed and unpacked at block 66 and stored in a designated disk storage location at block 68. Object storage triggers containing information product 12's import processing to assimilate the information update with the original information product at block 70, following which a completion report is issued at 72 and control is returned to the containing information product 12 at 74.

Optional Schedule Function

An optional transport function module for scheduled or poll-responsive information object transport can be provided to defer the fetching of an update or to defer another information transport operation to a specified later time, or until called by the server.

The optional transport function schedules a request, waits, then automatically performs the transport operation at the scheduled time. In polling mode, it activates (and, if necessary, interrupts

and then reactivates) the user station's ability to receive calls.

Mechanics of the optional transport function include a request for an ID number, an indicator for calling or polling mode and a schedule iterating a call time, a retry protocol, call activation and timing, along with an authentication procedure for the server and a completion status code.

Client-Server Communications Protocol

Communications between the information transport component 14, functioning as a client, and the server 22 follow a predefined communications procedure having cooperative user components comprising user fetch-send protocol 38 and server fetch-send protocol 44.

Server-client intercommunication can be broken down into five steps, a) login, b) manifest transmission, c) send operation, d) fetch operation and e) logout, as described in more detail below.

a) login

Login establishes a session with an authorized client. A handshake process between user protocol 38 and server protocol 44 identifies the user's transporter client system to remote server 22 by product ID and user ID, and a password or other authentication code. A failure reason code is given to rejected clients.

b) manifest transmission

Preferably, via user protocol 38, the user system issues an information object transport request manifest to server 22. Server 22 verifies its ability to meet the request by returning a manifest acknowledgment specifying which elements will be processed and provides reason codes for declined elements. Alternatively, as stated previously, manifest functions can be listed in individual

send and fetch protocols.

c) send operation

5 If the user system outputs a send object, through information transport component 14 and protocol 38, server 22 receives and accepts the send objects and stores them, identified by product ID and user ID. Error control and retry mechanisms are employed and successful receipt of the send object is acknowledged and logged.

10 If the action code calls for a response object, the server obtains necessary processing from a pre-designated external source (corresponding to the product ID and action code) and returns the response as a fetch object, called a response object.

d) fetch operation

15 The server obtains requested fetch objects by product ID and object name and forwards them to the transporter at the user. Error control and retry mechanisms are employed and successful transmissions are acknowledged and logged.

20 **e) logout**

 The server transmits the completed object manifest to the transporter, confirms and logs receipt, and ends the session.

25 **The Inventive Transporter Compared with a Conventional Communications Product**

 Figures 5 and 6 illustrate schematically the simplicity and ease-of-use benefits the invention provides Figure 6 to a user 100 in fetching an information object from a remote server 22 as

compared with the use of a conventional communications product (Figure 5), such, for example, as CENTRAL POINT COMMUTE (trademark) or PROCOM (trademark).

5 In the prior art embodiment of Figure 5, many operations require active participation by the user who, for example, must at least initiate any pre-transport preparation 104 of the information object, such as checking the specifications, checking work space available to store a fetched object and conducting any other preliminary checks. The user has to activate a communications product 102, specify a call route, and after the call connection is established, specify the objects and initiate a transport operation. Communications product 102, operating in a cooperative manner with remote server 22, will execute establish call connection 60 after the call route (phone number) has been specified and will execute transport objects 62 after the objects to be transported are specified by the user. Disconnection 64 is usually effected by a user executing a call termination command, which if the user is inattentive, or inefficient, may be delayed longer than necessary to complete the transport operation, running up unnecessary line or air time charges.

10
15
20 After completion of the transport operations, user 100 has to deactivate the communications product 102 and then initiate any required storing and processing of the fetched product 106. While some of these steps may be automated via one or more batch files, scripts or macros, a vendor of a containing information product 12 has great difficulty in furnishing such a batch file or macro for a mass market distribution because of the different systems and communications products encountered in a mass market, which systems and products have a variety of different specifications, performance characteristics and unique, incompatible scripting languages.

25 Equally, while some more skilled users 100 might be able to write their own batch files without undue difficulty to automate some of these steps. Many users will lack the ability or the inclination to do so. Also the effort would not be justified for a single transport operation. Nor is the result of such efforts likely to match the ease and simplicity of the results achieved by the present invention which enables even a first update to be obtained effortlessly with the software running in

unattended mode, after initiation.

Figure 6 clearly shows how the inventive information transport component 14 relieves user 100 of many tedious communication functions such as activating a communications product, specifying a call route, specifying the objects to be transported and deactivating the communications product. In addition, preferred embodiments of the invention also relieve the user of optional pre-transport preparation 104 and execution of store-and-process-fetched-product 106 if these functions are appropriate to the containing information product.

Referring to Figure 6, user 100 selects a transport operation from a user interface screen in containing information product 12, whereupon the latter calls information transport component 14 to activate transport. Information transport component 14 implements any necessary pre-transport preparation 104 and then, employing its own communications module 36, and server fetch-send protocol 44, proceeds in unattended mode, without requiring user intervention to establish call connection 60, to execute transport object 62 and automatically perform a disconnect 64, as described herein.

Automatic transport control and disconnection is a useful feature of the invention providing economy of line or air time charges and reducing congestion on the communications carrier. Using conventional communications products, (especially with online services) the duration of the connection may be unnecessarily extended by the delays and potential errors inherent in user control, resulting in increased communications costs and failures. The inventive transporter 14 provides software control of the connection duration, enabling it to be confined to a period sufficient to effect said unattended object transfer, enhancing efficient use of the communications medium.

Also as described, the operation can be monitored or controlled by employing an object manifest and is facilitated by the use of pre-specified addresses and transport characteristics. After satisfactorily completing the transport, the information transport component 14 automatically

deactivates and returns control to containing information product 12, preferably with a satisfactory completion report which containing information product 12 notifies to user 100 through the containing information product 125 user interface.

5 If the transport object 62 was a product update, optionally a store-and-process-of-fetched-object 106 is initiated by information transport component 14 and execution of the store and process operation may be passed to the containing information product 12. The user can now use the updated product.

10 As Figure 6 shows, when read, in comparison with Figure 5, the invention enables a user 100 to be relieved of all duties save for minimal selection and notification functions, while no complex added functionality is demanded of containing information product 12. Optional store-and-process-or-fetched-object 106 is contemplated as requiring only minimal modification of existing containing information product 12 functions while other more complex procedural and detailed transport related functions are handled by the information transport component 14.

Some non-limiting examples illustrative of practical commercial and industrial applications of the invention will now be described.

20 **Example 1: A News Magazine Distributed on CD-ROM**

Some weekly news magazines offer subscriptions to a quarterly CD-ROM which contains multimedia material plus a searchable full- text database of the most recent quarter's weekly magazine issues and enabling application software. Newer issues are not provided until the next quarterly disc is mailed. Accordingly the CD-ROM electronic magazine product steadily becomes
25 out of date and its value lessens.

The invention incorporates an information transport component 14 with a news magazine

product stored on a CD-ROM 16, to enable a user to fetch an information object 46 in the form of new issues (and their associated search indexes) from a remote server 22, as they become available, for example weekly. The fetched updates are stored on a consumer's computer hard disk storage device 24. Because of the size of rich content multimedia files, the updates are limited to text material including full texts of interim issues and associated files such as indexes. Because it knows the storage location of the updates, the next CD-ROM issue can include, as an install option, or upon first access, a request to delete the old now-outdated updates from hard disk 24, creating space for new updates.

User interface 28 in conjunction with user interface 34 contains code providing a menu selection enabling a user to activate the update fetch operation and then to provide integrated or seamless access to the combined data, searching both the hard disk storage device 24 and the CD, using both sets of indexes, so that the contents are viewable as a single collection, although an additional independent searching/viewing function for the updates could be provided, if desired.

A product setup routine adapts the information transport component 14 to work with the news magazine CD-ROM's existing software for creation of a user interface, searching and viewing. Communications options may be limited to direct telephone dial only. A simple user interface addition controls a setup process allowing the user to enter a unique user ID, provided with each copy of the CD-ROM distribution disk, and to create predetermined work areas on the user's hard disk.

A schedule of updates with names, dates, and files sizes is provided in the containing news magazine product on the CD-ROM and is accessed via user interface 28 in conjunction with user interface 34 to create a fetch object manifest 48. Optionally, user interface 28 in conjunction with user interface 34 creates a send object manifest 48 to control transport of user demographics for market analysis or for renewals, or the like, in the opposite direction from the user to the server, with the send operation being triggered whenever the next transport operation is activated, or optionally,

by allowing the user to trigger it.

A fetched information object 46, such as an update, is automatically decompressed and stored on hard disk storage device 18 as additional information object 26 for integration with the original CD-ROM product so that the user can view both the update and the original issues, and run searches across the entire collection.

Optionally, initial location of additional information object 26 may be an application work area location on storage device 18, and communications component 36 may be pre-set to pass control via API 42 to database management module 30 which will do further processing to integrate additional objects in accordance with the existing database structure 32 to provide a more complete level of integration permitting, for example, viewing of combined menus, nullification of obsoleted items, and cross-linking of hypertext elements.

If a send object has been prepared and included in the object manifest, such as a send object containing user information entered during the install process, or subscription request information obtained from the user, it is sent to server 22 to be stored and identified by product and user ID for appropriate action in due course. Acknowledgment of receipt of the send object is noted by communications component 36 and passed back to the user if such provision is made in user interface 28.

Both the fetch and send operations are closed ended in the sense of being operations that are pre-described in the original information product and once triggered, can be completed without human intervention of any kind.

To service the automated update facility running at the user's workstation, remote server 22 is set up to accept calls from valid user ID's, and is loaded with new issue text and index files, in the form of update information object 46, according to a publication schedule.

Example 2: Open-Ended Fetch of a Supplementary News Magazine Object

Open-ended access to supplemental information objects not described in the original information product can be obtained by providing in the original product means to fetch a directory of added features. This can be used, for example, by a news magazine publisher to provide special news features on an unplanned basis, or each weekly issue could be packaged with a directory of additional features available. The user first specifies a fetch of the new directory, or receives it along with a fetched update they have specified from a user interface menu, and then views the fetched additional features directory and initiates a fetch of a selected additional item or items in a second information object transport operation, using an information object manifest built from the new features directory.

The original, containing product news magazine CD-ROM user interface 28 preferably has provision for importing and viewing any information objects listed on a completed fetch manifest and delivered by the information transport component 14 into the designated work areas. Alternatively, a standard information transport component 14 user interface 34 can be used to provide this function in a less integrated form.

**Example 3: Retail Catalog on CD-ROM with Merchandise
Order Entry at the Server**

Multimedia product catalogs with 800 ordering numbers are now available on CD-ROM and also with pre-installed software packages on new computer hard disks. In this example, the multimedia (or text and graphic) product catalog is a read-only information product 17 which can be furnished with an information transport component 14 according to the invention, to facilitate order placement from such electronic product catalogs providing an easier order placing process than has heretofore been possible. Employing the inventive information transport component 14, a catalog vendor can enable a customer to place the order directly, via modem, without requiring a voice call

and ensuing verbal product identification, by pointing and clicking a "Place Order" or "Mark for Order" button on the user's computer screen. The order is transported to remote server 22 using the novel information transport component 14. Preferably a verification routine is included, requiring order confirmation with a user-supplied password, and possibly keying of the total amount to prevent unauthorized or inadvertent product ordering, for example by children.

Order fulfillment is effected by processing of the information in due course after receipt by the remote server 22 and any additional information required centrally is collected during product setup and held locally for transmission with an order. For example, setup can capture the user's charge card information, shipping address, and the like and create a header for an electronic order form.

When the user clicks the "Mark Order" button, procedures supplied with the user interface 28, as modified through user interface API 40, add order item identification information to an electronic order form. When the user clicks the "Place Order" button, user interface 28 triggers a transport request to server 22, to include the order form as a send information object 46. Transport of the send object, including the order form, from the user's station to the server is executed employing an object manifest 48, as described herein.

If not located at a vendor's or merchant's premises, server 22 can forward received electronic orders to the merchant for fulfillment, at appropriate intervals, via a vendor link 50.

This simple, low cost mechanism for automated order placement, can complement telephone ordering but lacks the credit-checking and inventory status capabilities that are frequently provided by phone. However, such a catalog application could allow the user to request the fetching of an inventory and price update object for use prior to the preparation of an order.

Example 4: Merchandise Order Processing and Confirmation
Retail Catalog on CD-ROM

A powerful electronic merchandising tool can be provided by providing the user with a full-function order generating capability and employing transporter 14 to transmit a user -created merchandise order, effortlessly and seamlessly, to a remote order-processing server. To this end, server 22 should be interfaced to the necessary merchant processing services for checking and reporting credit and inventory status.

An additional valuable option enables the system to apply pre-specified user instructions, previously obtained through user interface 28, to determine whether out-of-stock items are to be dropped, back-ordered, or substituted in color or other aspect. This information can be added to the electronic order form object, listed in object manifest 48 and become the subject of a further transport dialog between the user's station and server 22. In this manner a sophisticated purchase transaction is completed in a substantially unattended manner (save for deciding about back orders off-line), in as much as the customer does not have to maintain a phone conversation, while fully achieving the capabilities of telephone order placement. A further user benefit can be obtained by the providing a permanent record of the transaction (a stored electronic file) without user intervention. This not possible with telephone ordering.

This novel, automated, modem driven, order placement system effectively shields a merchant from having to deal with the problems of establishing communications with a mass of unknown end user computer systems, while automating the process and relieving the merchant of the costs of telephone sales staff. This aspect of the invention is valuable in avoiding troublesome, support intensive, communications which are subject to rapid technical change as new products are absorbed into the marketplace. In contrast, the merchant's special purpose vendor link 50 to the server 22, can remain relatively stable, while the customer interface at server 22, depending upon the sophistication and universality of the API's 40 and 42, and also upon any emergent communications standards, can

be adapted to accommodate a range of future products.

Example 5: Further Applications of the Invention:
Locked Information Products

As discussed in the "BACKGROUND OF THE INVENTION" hereinabove, some vendors, for example Microsoft Corporation, distribute information products in locked, inaccessible form, accompanied by (user-accessible) promotional information and demo versions. The prospective purchaser then calls an 800 number to order the product and is given a code which is entered to unlock the item for use. The inventive information transport component 14 and cooperative server component 22, can be used to simplify this process, and eliminate the voice call.

The information transport component 14 is used to place the order and as a subsequent step concomitant with satisfaction of the merchants purchase requirements (payment, etc) can, employing a suitable line entry or entries in the object manifest 48, fetch the access code, as an information object 46, in the same way as an order acknowledgment or other information update. The user interface and data management components of the distribution CD, or original information product, can be programmed automatically to use the code to unlock the product.

Employing the novel, digital, modem-enabled communications products of the invention, more sophisticated access codes than are suitable for verbalizing to a caller, can be used, and may include small programs or decompression utilities (although these would better be stored in the locked product), or customer-specific coding employing user-derived information. Thus, as a safeguard against fraud, being equipped with specific user or user product information, the access code can be a key or product uniquely matched to the user's locked product copy.

Computer Software Updates: For distribution of updates to software products, the original distribution version of the software product can provide registered users with an appropriate ID code

and update schedule. Should the revision be delayed, a revised schedule can be fetched.

Tax or other governmental filings and exchanges: An example of the generality of the inventive information transport system for sending and fetching well-defined information objects of many kinds is in the filing of tax returns. A send information object can be created and manifested to submit electronic tax filings to the IRS, as described above, for electronic product order forms. A fetch object can be created to obtain updated tax forms and the program logic relating to them, and to get information on new regulations. Analogous uses will be apparent to those skilled in the relevant arts of, for example, financial planning and portfolio management systems, to obtain current statistics, place orders, and the like.

Packaging of Transporter with User Interface/Database Search Software Facilities

In a modified embodiment, the inventive information transport component 14 is integrated with a general purpose user interface/database search (UI/DB) software package and tools. Such packages and tools, sometimes referred to as "authoring packages", are now used to produce CD-ROM's and similar information products. Thus a single UI/DB product may contain the inventive information transport component 14, and be supplied to publishers to be used to develop a family or diversity of information products, as a standard tool box.

A combination of the inventive information transporter product with such UI/DB products could facilitate development of applications by allowing much of the work of integrating a containing product's user interface 28 and database functions 30 and 32 (which could be controlled through the UI/DB product) with the inventive information transport component 14 to be performed once, in advance, by a UI/DB software vendor's skilled specialists, for use in a diverse range of products using that vendor's software. Such integrated offering would be advantageous to both the software vendor (by enriching its offering) and to the software vendor's publisher-customers by facilitating the desired function.

Electronic Product Distribution Service

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995
1000

In a valuable application of the novel electronic information transport products of the invention, remote server 22 can be operated to provide an electronic data product distribution service for multiple containing information products 12, each equipped with an information transport component 14, the whole facility providing a complete network distribution service, including network, technical and end-user support. Provision of such a distribution service is greatly facilitated by the novel transporter 14, described herein, the use of which for each vended product greatly simplifies the problems of handling updates to multiple products. However, such a novel service could also be operated with conventional software communications products by relying upon users of each to execute an appropriate sequence of menu selection and command line instructions to obtain an update by modem via their own pre-existing communications software. Similarly, While special advantages of seamless user adoption and integration into an original product accrue from the use of the inventive transporter to distribute product updates, such a distribution service can be used with advantage to distribute any type of electronic information product.

For many publishers (and for providers of UI/DB authoring software) the task of operating a publicly available server 22, and of supplying associated technical support to a wide base of customers using a diversity of communications products, even with the simplification benefits provided by the inventive transport product, is a task requiring specialized skills and staffing that a publisher, even one experienced in electronic publishing, will generally lack. Such a specialist capability is intimidating to provide and difficult to cost-justify for the limited number of information products that one publisher can supply.

By providing a new turnkey service or service bureau a specializing, skilled vendor would enable the publisher to avoid such burden. A provider of such a novel service can spread the costs of such operational activities and skilled staff across a large number of publishers and information products, achieving economies of scale and specialization.

The inventive information transport products extend to software implemented at server 22, or at one or more clients or satellite servers, of a network served by server 22, to provide the server-location functions of such an electronic product distribution service. Such distribution software can be separately marketed to publishers or UI/DB vendors who wish to operate such a service.

Gatewayed, "Open" Server

Example 4, above, shows how information transporter 14, as well as server 22 can remain simple yet provide a highly general and extensible service. In that example, server 22 provides the functionality of a general-purpose transaction gateway or interface to an external function processor. In this particular case, the external function processor gatewayed by server 22 via vendor link 50, is the merchant's order processing system, which receives the order, determines its disposition, and responds with order status information which is relayed back to server 22 for return to the customer as a response object in accord with protocols 38 and 44. The user need not be aware of such complexities, nor do the client transport components 14 of the inventive product need to be aware of, or provide information for remote routing via vendor link 50. Only the server 22 needs this information, and server 22 needs only to know that send objects with names that fall within a specified class for a specified product ID, must be forwarded to a specified external processor, and that the corresponding responses from that processor must be routed back to an originating client as response objects. Thus the inventive information transport component 14, by virtue of its simplicity has general applicability and many uses, as described herein and as will further be apparent to those skilled in the art.

In implementing an ordering service using the inventive information transport component 14, order and response objects are preferably formatted by the containing information product 12 to be consistent with existing or future electronic data interchange (EDI) standards which define protocols and formats for data interchange between customers and vendors. The information transport component 14 and the server protocol 44 provide the low-level EDI transport functions and

are independent of object content defined by higher layers of the EDI protocol. Preferably, the server has added routing layer information to move objects to and from the external processor.

To provide a suitable EDI-compatible function, server 22 can be programmed with such higher layer EDI routing data for its exchanges with the merchant's external processor. Employing such a gatewayed system, a single EDI network connection can be used to connect the server 22 to a large number of different merchant processors anywhere in the world, across wide area networks and links between same, for example Internet.

This concept of an "open" server, providing a gatewayed pathway for information objects to travel between a wide base of users and one or more remote vendors or other object sources is greatly facilitated, or enabled, by employment of the inventive transporter 14 which effectively provides a protocol translation function enabling a simple information transport service to be offered which is easy and economical to use, both for the end user and the vendor or information supplier. Such a transport service compares favorably, for its intended information transport purposes with broader function and more complex of full online services, such as COMPUSERVE (trademark), and the like, described hereinabove.

Further Embodiments with Broadcast, Subscription Delivery and On-demand Capabilities

Receipt of broadcast data: As an alternative to modem-based wireline or wireless calling to a server and requesting data objects, the information transporter system of this invention can be beneficially employed in a broadcast information distribution system wherein data information objects are contained within a broadcast data stream with recipient communications devices tuned to identify and receive from the broadcast specific data elements to which they are entitled. On the Internet, such broadcasting to a selected group of recipients is called "multicasting."

Broadcasting can be airwave broadcasting via satellite, FM, or TV subchannels in the manner, for example, used by Mainstream Data Ltd. for the broadcast of news wires. Alternatively, the broadcast data stream may be cable or line transmitted, for example, over cable television systems. Minor extensions to API's 40 and 42 could accommodate such a facility. A modified setup function could alert a user's receiving communications device to watch for receipt of data objects identified as relating to the original or containing information product, and to capture and hold identified objects in temporary storage. A schedule transport function can then be set to fetch the received data objects from temporary storage and prepare them for use.

Subscription delivery: Although the invention has been described as being particularly applicable to the solution of problems arising in distributing updates of original or previously purchased or delivered electronic information products, those skilled in the art will appreciate that, many of the benefits of the invention can be obtained without any initial information content being delivered to the user with the original product. The user could simply receive the information transporter 14 and all product information could be received subsequently, after installing the information transporter 14, in the form of fetch objects transmitted from a remote server or other suitable source. For example, a newsletter service could provide a disk with the transporter and a user interface, but with no initial information content. As the transporter 14, operating at the user stations, automatically fetches new issues according to the newsletter schedule, the information is, in effect, pushed down a channel from the distribution server for delivery to the base of subscribing users.

Information-on-demand services: In another embodiment, providing an information product on demand service, vendors can freely distribute a novel electronic marketing product comprising a transporter on diskette, along with a simple user interface and a catalog of information product items available from the vendor, without including the products themselves. Such an electronic marketing product could be distributed through the mail, as a magazine insert giveaway, or through any other suitable marketing medium. The transporter could be activated at any time by

the user to call in and fetch a cataloged product, as well as a current catalog, possibly after sending a credit card order form, or the product price could be paid to the vendor by obtaining the product from a 900 number providing vendor reimbursement from the telephone network.

Open Architecture Online Service Access

In a further aspect, the invention provides an information transport component 14 that functions as universal or generic client interface software, enabling a user client to work with any one or more of many online server-based information distribution services.

Many online information distribution services used to disseminate electronic publications comprise intelligent user interfaces which employ a client component running on a customer's personal computer (PC) to communicate with a central server facility operated by the online service, by means of a proprietary protocol. The client interface packages are proprietary to a particular online service.

Prospective publishers wishing to offer electronic products online, contract with online service providers to enable customers to use the online service's client software to access the publisher's material and related online communications services (bulletin boards, etc.) on the services' servers. The publisher is limited to using the presentation facilities provided by the user interface in the online service's client software. This limitation impedes migration of publisher offerings and makes it difficult for either a customer or a publisher to swing information transport component 14 access from one service provider to another because each service requires its own software package.

Third party interface developers cannot contribute to such online interfaces for a publisher without the cooperation of the online service provider which may be difficult or impossible to obtain. Accordingly, only limited user interfaces with moderate sophistication and variety can be offered.

Accordingly in another aspect, to provide open architecture online service communication, the inventive information transport component 14 can be embodied as a flexible client interface which can be actuated to operate with any one of a number of online services by providing a generic client interface foundation API (application program interface) combined with a set of translators and protocol drivers capable of communicating the user's functional requests to any one of a set of
 5 online services, using their corresponding proprietary protocols.

In this aspect the invention permits publishers to develop highly sophisticated and individualized user interfaces independently of the limitations of the online service providers' capabilities. Such enhanced user interfaces are attractive to publishers seeking differentiation of their products by providing an appealing individualized interface with a signature look and feel. In contrast, online service providers seeking to economically carry content from many publishers provide generic interfaces acceptable to all.

By incorporating operational translators for a number of online service protocols, which translators fully adhere to the detailed specifications of each protocol, a multi-service capability can be provided.

Online services generally provide similar types of services with nearly standard functions and similar user interfaces. Major service types include bulletin board, chat, electronic mail, document browsing, and database search. Use of creative typography, layout, graphics, and other artistic elements to offer the presentation quality and variety typical of print media is desired by publishers using this medium.

The invention facilitates this end by providing open development platforms for development of advanced interfaces while shielding developers from the complex details of communication with an online server. The shielding is accomplished by providing an API which supports communications service requests at a simple functional request level.

Referring to Figure 3, multiple targeted online services 80, can be accessed by a client interface 82 comprising any of multiple graphical user interfaces 84 driving a generic API 86 which works with plug-in translator/communicator modules 88 which are provided to communicate one to each targeted online service 80. Modules 88 mimic the online service's protocols, so as to be essentially indistinguishable from the proprietary interfaces normally used. A communications manager 90 receives input from API 86 and outputs through protocol mapper 92 which selects the appropriate protocol.

In this embodiment, for use with full-function online services, the functions of API 86 and protocol 88 are extended to support extended, open-ended interactive sessions and the more varied client-server interaction needs of session-oriented interactive online applications such as bulletin board posting and browsing, online chat, electronic mail, database and menu browsing, and database search.

Similarly, in the aspect shown in Figure 3, the invention can be provided with the same kind of additional flexibility with regard to the user's connection to server 22 as the invention can provide for more basic fetch and send functions. While the inventive client server protocol 38 and 44 is particularly suited to the functions described, other existing or future services and corresponding protocols could be used, if necessary with adaptation, to provide workable services for use in conjunction with transport component 14. Such use may require modification of communications module 36 and protocol 38 by the addition of a protocol mapper 92 and appropriate server protocol plug-in 88 to communicate to an alternative server.

In either case, such added flexibility in use of the inventive product increases a publisher's choices in selecting server and network facilities through which to distribute information products, and enables the publisher to offer fully customized user interfaces for use with multiple, or any one of multiple server and network services which do not provide for such customization. In this embodiment of the inventive transport component, a containing product can offer a unique custom

interface and provide for access to additional information products from such varied source facilities as the Internet, full function online services, emerging groupware network services, conventional bulletin board systems, and future network services using wireless or cable television technology.

5 While the invention can provide a flexible, generic API, in some circumstances, an existing third-party API designed for use with a single specific online service can be combined with an embedded transporter and server protocol mapper to allow products designed to use the third-party API to employ any of multiple servers for distribution, avoiding commercial distribution restraints associated with that API, for example use of a particular server.

10 The inventive protocol mapper 92 can insulate a containing information product from the variations among such services, and can allow a single such information product to be transported through a variety of such services, and to later be moved to other such services by simply selecting an alternative protocol mapper. Multiple such protocol mappers can be packaged within a given information product to permit alternatives to be selected by the end-user from a list. Thus the invention further permits information products and related UI/DB authoring tools to be service-independent and neutral.

15
20 Figure 4 provides an overview of the use of the inventive client interface accessing multiple publications via multiple remote online services, as well as multiple locally mounted data sources and storing additional retrieved data locally.

25 Enhancements can enable a publisher's service to provide integrated, seamless access to content distributed over several different online services; to seamlessly combine access to both online and local CD-ROM-based content; and to coexist with and share resources with other publishers' services on the user's PC.

In summary, the invention provides, in this aspect, a simple, easy-to-use multi-protocol

capability that enables an electronic information object to be transported from a publisher to a wide base of users by any one of a number of online services, without sacrificing individual product identity.

Recursive Updating of the Transporter

Another application of the inventive information transport product, or transporter, is a recursive use to update itself, in the same manner that the transporter can update a containing information product. This method can be useful in a variety of ways, including to upgrade the transporter by the addition of new protocol components, new compression techniques, or new network access methods.

An important class of such self-updates is to provide added flexibility in specifying network access procedures. For example, the user setup routine could be extended into a two stage process. In a first stage, each user's transporter calls in to a common pre-set phone number, in order to fetch a second phone number selected according to the user's particular product, location, or some other parameter. The second phone number, or other address, can then placed in the setup as an update, to be used in subsequent transport operations.

This two-stage method can provide efficient use of a single pre-set toll-free 800 number for an initial call from any number of different products, which initial call yields a second number corresponding to a specific Product ID, which number is used for subsequent calls.

In an advantageous embodiment, the second number is not toll free and may include vendor charges, in the manner of a 900 number. This arrangement enables a system in which users do not pay for initial setup calls (and any failed connections which might result from initial setup problems), but do pay long-distance toll charges, and per call vendor fees if the publisher so desires, for subsequent product information transport from the second number. This two-number process can

be carried out without requiring any phone number entry or selection by the user. Additionally, the second number can readily be changed whenever desired by the publisher, even after product discs have been shipped.

User's Station

References herein to a user's station, workstation, computer or terminal will be understood to embrace any "information appliance" or intelligent device having the basic computer-like functions of programmed logic, storage and presentation, or having the ability to support an operating system for managing user input-output with a processor, including intelligent cable television controllers, video game players, information kiosks, wired and wireless personal communicators, and even system controllers such as automotive computers.

Benefits Provided by the Invention

Employing the novel information transport component 14 interacting with remote server 22 through communications protocols 38 and 44, the invention enables the following advantageous objectives and other benefits to be achieved:

- i) simple and easy execution of one or more fetch or send transactions to or from a remote server, by an ordinary, unskilled user with no human interaction at either end being necessary after initiation;
- ii) automated transport of predefined information objects between client and server in a closed-ended fashion, without burdening a client-based user with complex routing logic; and
- iii) creation of an economic, easy-to-use, function-specific, self-contained information transport component 14 software module suitable for mass distribution in a containing information product.

The preferred use of an object manifest in a transport control mechanism which includes transporting the object manifest between client user and server, and referencing the object manifest by user fetch-send protocol 38 and server fetch-send protocol 44 facilitates achievement of the following additional objectives:

- iv) simple, tight-knit control of the communication process and of error handling; and
- v) creation of a transport control mechanism, and thence of an information transport component 14, which operates smoothly and transparently to the user and independently of the information object content or of the nature of the application.

The invention thus provides an information transport software component which can be employed to transport a wide variety of data objects or applications and can be easily incorporated in many different information products to provide multiple novel containing information products 12 with built-in automated updatability or upgradability executable at an appropriate time by simple, user-menu selection or automatically.

Further Benefits

In addition to the benefits of a powerful and efficient information transport method, use of a standard, formalized transporter, its API, and client-server protocol, pursuant to the teachings of the invention disclosed herein, can provide any or all of the following significant benefits to users, information product vendors, application vendors, service providers, tool vendors or others:

- vi) use of a standardized facility to perform a well-defined function in a known way (with available implementations for a varied and expanding set of hardware and software platforms);
- vii) reliance on a standardized facility that can be extensively tested and proven reliable across a wide variety of equipment and conditions;
- viii) reduced need for information product developers (and users, and user interface/database search software vendors) to know and understand the complexities

(and rapid evolution) of data communications;

- ix) ability to build a single functional interface that can smoothly employ a dynamically expanding variety of communications facilities and technologies;
- x) ability to obtain operations and user support services relating to the difficult task of managing a server and its communications with large numbers of end-users;
- xi) user-recognition of the novel information transport facility across a range of unrelated products, establishing a positive brand cachet benefitting users and vendors alike;
- xii) ability to package the transporter facility with other tools, such as a UI(user interface) and database search capability to extend the value of those tools economically and with the ability to gain the benefits described above; and
- xiii) control of communications costs and failures by elimination of human intervention, with its attendant time-consuming delays and errors, from the period during which the user's station is connected in real time communication with remote server 22.

Stated succinctly, by having the novel information transport component rely entirely on a containing information product for all user interface and information presentation functions, there need be no restrictions on the creativity of the containing product imposed by the needs of a third party communications product. Thus the containing information product can present transport functions with any desired look and feel.

Another advantage of the information transport system of the invention is the avoidance of difficult or complex navigation tasks, and the use of simple direct dial communications which are suitable for sessions that are short and infrequent. The inventive information transport products described herein are consistent with or readily adaptable to the needs of many publishers of a diversity of materials, which needs are commonly centered on discrete products and content.

A further advantage of the invention, from the point of view of publishers, is that because

the call is customer initiated, the customer pays transport costs (telephone line charges), simplifying costing for the publisher who avoids having to figure shipment or other transportation costs before sale and build these costs into the price of the product or update.

5 The inventive approach to mass distribution of electronic information products described herein can also provide advantages in high-value environments such as those of Counterpoint Publishing's Federal Register products cited hereinabove, providing a more seamless integration of the fetching of updates received via modem (and selected and extracted by the user from the "Daily Federal Register") with the original product on CD-ROM, the "CD Federal Register". Product installation can be simplified, and a separate user invocation of, and interface to, a general-purpose communications package can be avoided. In addition, by employing the user's pre-existing modem and avoiding need for a general purpose communications product license, significant cost savings can be obtained.

15 The better to comprehend its possible applications and enhancements, embodiments of the invention can be grouped in four levels, as a follows.

Level Zero A novel basic transport function embeddable in any of a range of electronic information products to provide economical unattended updates.

20 **Level One** Basic transporter 14 incorporating API's 40 and 42 adds a powerful new capability to be used with an electronic information product's custom user interface, optionally enhanced with a database management facility for seamless integration of an update with an original product.

25 Other options can integrate with relevant third-party packages such as authoring packages.

Level One (Server enhanced) Adds server operation and user support features enabling

publishers to outsource tasks which may be difficult or unfamiliar to them.

Level Two Adds optional translation or use of alternative server protocols enabling an embeddable transporter product to work with many different servers or services including, for example, standard BBS's, Internet servers, and special transport services such as those offered or proposed by communications providers such as AT&T, MCI, Compuserve, America Online and cable television systems.

Level Three Adds a full online service user interface API with correspondingly enhanced client-server protocols to provide for full-function online service sessions with user interface control, ability to work with a range of online services, providing a publisher with flexibility in their use of existing and emerging services.

These four levels of the invention are illustrated schematically in Figures 7-11. Referring to Figure 7, depicting a basic Level 0 embodiment, user 100 employs generic onscreen interface 110 to initiate an update request 112 from a remote source (not shown), for an update object 46. After initiation, for example by clicking on a button in generic interface 110, communication with the remote server and retrieval of the update object 46 can proceed automatically, as described herein. Alternatively, although not shown, similar means could support submission of a send object to the remote server, both at the basic level 0 and in the cases of Levels 1-3.

In the Level 1 embodiment shown in Figure 8, incorporation of APIs 40 and 42 in or with transporter 14 enables the containing information product 12's user interface 114 to be supplemented with object transportation functions. Also shown is a received update object 46 seamlessly integrated with information product 12 using a database management module (not shown) as described in the parent application.

When the Level 1 embodiment is enhanced with a database management module or with an

authoring package a particularly valuable embodiment results, which may be described as a UI/DB-package-enhanced Level 1. In many possible applications, product 12 may not be created by original programming from scratch, but may be created by employing a standard software package which is then customized to integrate the desired publisher's information content with a standard software package or toolkit that provides the UI/DB functions. Such a UI/DB package or toolkit can use APIs 40 and 42 to provide a point of linkage to the transporter 14.

A programmer, developer or other software provider is thus by such an enhanced Level1 embodiment to offer a software package which can easily be utilized by many different publishers to add whatever content they desire, and gain the advantages of automated, or managed information object transport, as described herein, while avoiding any need for the publisher to address the tedious and perhaps difficult mechanics of the transport operation.

The software provider can use the inventive transporter 14 as an optional element, or include it as part of his enabling product, thus offering added value to the publisher. In doing so the software provider can, if desired, set up a standard or readily customizable set of UI/DB elements to support the desired transporter functions, and provide all corresponding interfaces to APIs 40 and 42, thus relieving the publisher of the need directly to interface to the transporter via its APIs. Such an approach of integrating the inventive transporter with a more general UI/DB authoring package can also be used to include the inventive transporter component into a more broadly functional offering to publishers for the more advanced embodiments of Levels 2 and 3. It will be apparent that if a third party authoring package offers an API or system developer's interface for use with its product, the integration of the transporter with such package may be best accomplished by creating a special and novel interface module which links between that existing UI/DB package's API and the transporter APIs 40 and 42. Such an API interface module comprises an element of the invention.

The server-enhanced Level 1 embodiment depicted schematically in Figure 9 shows how operation of a server 22 and technical support functions can be off-loaded by an electronic publisher

116 to a server operator 118. Electronic publisher 116 can distribute an information product 12, which may be complete with content, or may be merely an enabling shell, directly to users by whatever means is appropriate including distribution on physical media and electronic downloading. Updates are then furnished to server operator 118 to complete distribution of updates to appropriate users. As will be apparent, updates may embrace essentially any desired information or content, including original content intended to fill a previously distributed shell.

As shown, transporter 14 can be contained in each of a number of information products 12 distributed by one or more publishers to one or more sets of customers. Multiple information products 12 can be updated from a single server 22 or a server 22 may be dedicated to each individual product 12. The electronic publisher is thus relieved of the expense of replicating and distributing updates, or of the technical challenges of maintaining their own distribution server 22.

If desired, integration between a fetched object and original information product content can be effected by a separable content integration module for seamless viewing or processing by the user of combined local and remote content. The integration module can comprise the user interface and database integration tools, and may or may not contain the transporter 14. Such an integration module, with or without the transporter, may, subject to customization to meet the purposes of the invention, be obtainable from third parties.

The Level 2 embodiment depicted in Figure 10 illustrates how the invention enables great communications flexibility to be easily included into their products by publishers or producers and, in turn, put in the hands of even novice users simply by equipping transporter 14 with multiple protocols enabling the user automatically to access any one of multiple servers 22 or other remote communications facilities (by including multiple protocol plug-ins, as illustrated in Figures 3 and 4 and described in the parent application page 78, line 12). Illustrated, by way of example, are an Internet server 22, or Internet point-of-presence, through which all or any server on the Internet may be accessed; a BBS server 22, or "bulletin board" server for access to low-cost direct-dial servers

; and a third route to any other desired remote communications-equipped server, which may include commercial online services, is also shown. By channeling communications and remote data retrieval to the user via the containing information product 12, a seamless presentation through the information product 12's distinctive user interface 114 can be made. For example, a stock management product could access one remote server to update prices of the users stocks and a bulletin board to obtain current news items of the company whose stock has been updated.

In another application of this Level 2 embodiment depicted in Figure 11, transporter 14 includes multiple client-server protocols enabling it to access any one of several online servers I, J and K. This embodiment enables a publisher to distribute product and permit the user to update or supplement it via whichever online service they happen to use, or subscribe to, thereby enabling a publisher to economize on the server function by using an established online service, yet reach the widest possible electronic consumer base by reaching users through any one of multiple services, e.g. CompuServe, America Online, Prodigy, Microsoft Network or other proprietary online service, or Internet access provider, each of which may have limited accessibility determined by market scope, geography or technology or the like.

The inventive transporter enables the publisher to accomplish this with a single, uniform interface to APIs 40 and 42, and thus without need to implement costly program interfaces specific to each online service. As described in the parent application, a preferred embodiment of the protocol plug-in maps the APIs 40 and 42 to any suitable pre-existing API available for use with a target online service, such as is offered by CompuServe for connection to its online service, or for use with an Internet server. (Alternatively, a converse translation could be effected: APIs 40 and 42 could be overlaid by a layer that simulates a pre-existing protocol used by a containing product 12 to communicate with a single online service I, thus allowing it to be retargeted to other online services J or K or other servers 22, without significant program change to the containing product.)

The Level 3 embodiment, as described in the parent application, can also be depicted using

Figures 10 and 11, where in this case the connection protocols are enhanced to support full, continuing online session functions such as browsing, search, and chat.

Level 0 enables a user to retrieve remote information objects such as information product content or software updates, or send in information objects such as product registrations, or orders or inquiries, in an automatic, unattended manner after initiating the communications process with, for example, a single mouse click.

Level 1, by providing suitable API functionality, enables automated object retrieval (and send) functions to be integrated into the information product's own interface, a significant user and marketing advantage. Level 1, UI/DB-Package-Enhanced, integrates with authoring packages to simplify the information product producer's task even further. Level 1, Server Enhanced, by including server functionality, provides a complete service for a publisher.

Level 2 enables information objects to be fetched or retrieved, or to be furnished from pre-existing commercial services, with which the user may already have established communication channels, for example by subscription and enables a publisher to reach most or many users via a small number of pre-existing commercial online services. In addition, Level 2 enables a user to integrate local content, available from the user's local physical media, hard drive or optical disk for example, or locally created content with online content drawn from online sources or the Internet.

Level 3 enhancements of transporter 14, and especially of APIs 40 and 42 can permit tight-knit, seamless integration of appropriate content in fully online modes, giving the user an open-ended feeling of continuity between their own local resources and retrieved remote content. This facility is of particular value for sophisticated multimedia applications which may require content from multiple sources to be assembled into a coherent work such as a television commercial, a training video or "mini-movie", using moving video frames, text content, voice, photographs, special effects and so on, for highly interactive processes such as extended, free-flowing browsing and searching

of relatively unbounded network content, and where dynamic contributions or interactions among multiple participants are to be accommodated, as in conferencing or real-time gaming applications involving interactions between multiple network users.

Equivalent Networks and Interface Devices

The invention described in the parent application addresses, *inter alia*, the problems of moving digital information objects across a telephone network between a remote source and a disparate body of users and provides a transporter which simplifies and automates transport enabling even novice users to exchange pre-specified objects with a remote source via the telephone network using modems or equivalents. It will be apparent to those skilled in the art that, unlike a local area network ("LAN"), a telephone network, the phone numbers of which may be regarded as network node addresses, nevertheless lacks a distributed file management system for simple transport of files between nodes. Functions such as verification of safe receipt of information objects are readily effected on a local area network, for example by executing a directory listing of a remote node address, and much more sophisticated transport management capabilities can and are readily provided by network operating systems, network utilities, network management applications and so on.

A fully functional distributed file management service, such as is provided by a local area network (sometimes called a distributed I/O service, "I/O being an abbreviation for "input/output") permits remote files to be manipulated and accessed via the user station's operating system's normal file I/O read/write and move/copy commands, much as if the file were on a locally attached device (once appropriate access permissions have been enabled), without the complicating need for special, supplementary remote file access protocols such as File Transfer Protocol (FTP). As explained in the parent application, LANs impose burdens including significant initial costs and setup requirements, homogeneity and complexity at the nodes, login difficulties and so on, which problems are not shared by the ubiquitous telephone network to which anyone may successfully connect with

a diversity of computer and modem or equivalent equipment.

It will be apparent that the benefits of the invention are obtainable when using other mass-market communications networks equivalent to a traditional telephone network which equivalent networks lack basic file management capabilities. Some such equivalent networks, which may or may not include file management capabilities, and which may be deployed over telephone network hardware, or interface therewith, include ISDN, ATM and ASDL as well as off-air services such as cellular or CPCD and as well as, cable television networks for which computer connectivity is emerging in 1996 (as foreshadowed in the parent application). Such various networks will usually require their own interface device, for example an ISDN board or a cable modem, which for the purposes of the present invention, and to the extent that they are deployed on networks with a lack of distributed file management services (or where such services cannot be relied upon to be available to any given user whenever needed), will be equivalents of ordinary telephone modems. The Internet as well as proprietary online services or other wide area data networks, especially public networks such as those using the X.25 standard (as referenced in the parent application) also generally lack distributed file management services. References herein to "direct dial-up communication" and "telephone network" are intended to include such equivalent networks lacking distributed file management services, including the Internet, and references to a "modem" include such equivalent network interface devices.

Products with Multipath Hybrid Access to a Remote Source

The invention can provide an information product with multipath hybrid access to a remote source, enabling a user of the product to receive updates from, or otherwise communicate with a remote source. Pursuant to such a preferred embodiment, an electronic publisher, or other vendor, can combine, on a consistent basis in a single product, automated online access to the Internet, (or other data network with or without file management capabilities) with dial-up access to enable a user to connect with the publisher's server via whichever online service the user already employs for

Internet access or else via direct dial-up access to the publisher's server, in the event that the user is not a subscriber to one of the online services for which a protocol is provided. The access path can either be user-selected or may be automatically software-selected according to what installed modules are found on the user's computer.

5

This embodiment is valuable for publishers desiring to reach a mass market of computer users with a product that is readily updated in the most practical way. As at early 1996, in spite of the immense publicity received by the Internet, the majority of modem-equipped computer users do not have Internet access, nor do a large percentage use any other online service, except where the context indicates that the specific, ordinary meaning is intended. This is particularly true of home and small business computer users, who constitute a desirable market for many publishers.

Internet Applications

Internet access is relatively complex for an inexperienced computer user to set up, and usually requires commitment to a monthly subscription, yet once set up it is easy to use. The multipath hybrid access embodiment of the invention has the advantage of enabling those users who have Internet access to enjoy the functionality, speed and economy of a network path via the Internet, while other users, a vast market, can simply use dial-up access via the telephone network: they are not required to go to the trouble and expense of establishing an Internet or online service capability. Some users may employ multipath access capabilities to use different access paths according to circumstance, for example, using a network access path from the home or office and direct dial-up on the road where their proprietary online service, or other network access route may not be available.

20

25

Since the Internet is not expected to reach the majority of such other users for some years this embodiment is particularly advantageous for publishers desiring to reach a mass market. Products that automate communications via an online service yet omit dial-up capabilities will exclude a large

number of prospective customers. Technically, no special effort need be made to provide Internet access to users who do not have the capability: it is simply used if present on the user's computer. However, the addition of a facility to set-up a new Internet or online service subscriptions in a further expanded embodiment of the invention will be valuable to some users. Components for such new-
 5 user set-up are commercially available for example from Internet software and service vendors, and can be combined with suitable elements of the inventive transporter component to give the user added options.

Although at the date of this application the Internet is such a dominant world-wide communications force it is hard to contemplate alternatives networks, they may arise, and indeed local organizational equivalents embodying some of the advantages of the Internet's standardization and hypertext capabilities are emerging and have been dubbed "intranets". Equally, comparable or competitive wide area networks based on substantial new or existing infrastructure may emerge. Cable television networks might provide such an infrastructure base. In most cases, relevant aspects of the invention, as described herein in connection with the Internet will also be applicable to such alternative networks and intranets, to an extent that will be apparent to those skilled in the art. As described above under the heading "Equivalent Networks", like telephone-like switched point-to-point networks, unlike local area networks supported by a homogenous network operating system maintaining a shell at every node, more heterogenous data networks such as intranets and the Internet
 10 do not generally support and provide full distributed file management systems enabling digitized files to be manipulated in the same way as local files, although they generally provide for more limited services using protocols such as FTP or HTTP (hypertext transport protocol) which permit files to be copied from one node to another with one or a few simple command line instructions. However, block transfer, for example to read one or more records from a database file, are either not,
 15 or not readily, accomplished. Nor can a remote program be executed.

Referring to their Internet origins and choosing to characterize them by important features of the World Wide Web (though other features might be used) the intranets and Internet-like

networks described in the preceding paragraph can be termed webbed data networks and are notable for having multiple remote data servers supporting hyperlinked data resources. Such webbed data networks achieve much of their utility from employing a standardized object preparation language, e.g., HTML, and a standardized file transfer or access protocol for platform-independent transport and utilization of objects on the network.

Unless a different meaning is clearly required by the context, the term “web” is used herein to connote an array of hyperlinked information objects stored at one or many locations on a network.

Transporting Information Objects to and from Web Browsers

As described in the parent application, the inventive transporter component can be advantageously used to facilitate transport of information objects across the Internet to and from containing information products 12, by automating access to the Internet and to a predetermined Internet site or resource. It can also be used for transport across other network facilities, including direct-dial, and many different user interfaces and content formats can be accommodated. It will be apparent from that disclosure that one such particularly useful embodiment of the containing information product 12 is that of a web browser, as a UI/DB package which can incorporate transport component 14 to provide an alternative, dial-up route of access to Internet servers that also support dial-up access via a telephone or equivalent network, or whenever use of the transporter’s short-burst mode of closed-loop communication session is desirable. Similarly, such access can be provided indirectly via a separate dial-up server which contains, or has access to, the content which is also accessible via a Web server, or equivalent content.

Some known web browsers are discussed in Rick Ayre *et al.* “Web Browsers”, *PC Magazine* Vol. 14, No. 3, (February 7, 1995) pages 173 *et seq.* As reported at page 175, column 1, web browsers can be embodied as operating system components , for example OS/2 Warp (trademark, IBM) and Microsoft’s Windows 95 (trademark). As operating system software expands and

assimilates what were once free-standing, or separately marketed software utilities, for example, memory managers, disk compression utilities and backup programs, distinctions between what is operating system software, or a utility or small application, become more commercial or market-based than technical. Similarly, communications services provided by Web browsers (such as HTTP protocol access) and other similar Internet tools (such as for FTP protocol access) could also be useful as software facilities on which to build transporter protocol plug-ins, and it will be apparent that use of any such available software components is contemplated by the invention, for example, as comprehended in the discussion of protocol plug-ins in the parent application.

World Wide Web

Internet sites using the World Wide Web, “Web sites”, present their resources via what are called Web pages, including top level pages called home pages and a linked network of other Web pages. Web pages may be accessed and viewed with a Web browser program which provides standard graphical user interface and data presentation functions to apply format controls coded into the Web page using a standard format to enable a visitor to the site to browse the site’s resources via textual and graphic information, drop-down contents and catalog lists and via search windows with varying degrees of functionality.

Keys to the explosive growth of “the Web” are the use of standardized communications protocols (“HTTP”, hypertext transport protocol) and data content and formatting coding language (e.g. hypertext markup language “HTML”) to effect real time transfer of interactive images (Web pages and related content or services) across the Internet, using digital packet addressing. Sponsors or suppliers of Web material can use their Web pages as an interface to provide substantially any desired content.

In early 1996, today’s format is HTML which is a currently popular embodiment of Standard Generalized Markup Language (SGML), a complex standard, adherence to which provides the

widespread readability of Internet documents. HTML provides a format to describe the design of a document and its connection to other documents accessible via the Internet, using hypertext links, or “hyperlinks”. Alternative content formats such as Adobe’s ACROBAT (trademark) provide similar formatting for use with a suitably augmented browser, and other such formats may emerge and evolve. Adobe’s ACROBAT is an example of an authoring system or application which creates information objects that are integrated with their own display or utilization, applets (mini-applications) or tools, for platform-independent viewing or playing of the objects.

Typically, Web pages contain both internal hyperlinks to site features and external hyperlinks to other sites and they may also permit activation or downloading of sound, multimedia or other more sophisticated content. Such hypertext links, or hyperlinks, provide immediate initiation of a connection to an information resource for retrieval of an image, in response to a mouse click or two. Hypertext links use uniform resource locators known by the acronym “URL” to find resources on the Internet. The URL identifies the location of a file on an Internet server by a server address such as <http://www.uspto.gov> and a more or less extended directory path to a filename for a specific page or tag within a page, if it is a Web site, or other data source.

Many thousands of commercial organizations use the Web for publishing, for customer service, for distributing product information via catalogs and the like, and for online sales. Content varies from a few simple text paragraphs to large and complex data suites providing multimedia presentations, games or other entertainments with audio, video and animation. New uses of the Web and methods of doing business are continually being invented.

A Web browser is an application running at the user’s station which can access search engines, find and retrieve Web pages using URLs, and assemble the retrieved elements of text, graphics, sound and video, if present, into a coherent printable document or playable presentation. Typically, a Web browser also provides a variety of tools to make “hot lists” of the user’s preferred sites, to effect various file and connection management functions, and so on.

Some drawbacks of the Web are that conventional Web access reaches only a small proportion of households with personal computers and modems, (a 1995 estimate is that only about 21 percent of 27 million households with personal computers had Internet access); that such access is generally available only by continuing subscription through an access provider service by paying a minimum monthly fee; that connection time can be expensive; and that Internet access is subject to congestion and interruptions, or loss of connection. For a commercial content provider desiring to reach a mass market, these are important limitations.

Information Object Distribution System for Webbed Networks

To overcome these and other problems, the invention provides an information object distribution system for webbed networks, such as the networks described above, which system comprises:

- a) a web site server at a web site on the network and supporting hyperlinked information objects accessible to network users;
- b) a web package server having an open-ended connection to a telephone network for data exchange with desiring ones of said network users directly via said telephone network and supporting one or more web packages comprising selected ones or sets of interrelated ones of said hyperlinked objects whereby said desiring network users can obtain said selected hyperlinked objects by direct dial-up connection to said web package server;
- c) at least one web browser at least one of said user stations to retrieve and view information objects maintained locally or at said web sites on the network, said web browser being capable of following hyperlinks between objects locally or on the network; and
- d) also at said one user station an information object transporter for automated retrieval of one or more of said selected information objects from said web package server by direct telephone connection, said transporter being operable in unattended mode after

initiation to retrieve one or more pre-specified objects from said web package server to said user;

wherein link rationalization is provided to enable appropriate hyperlinks to be followed to retrieved information objects stored at said one user station; whereby a user at said at least one user station can choose to retrieve one or more of said selected information objects either via said browser and said webbed network or via said transporter and said telephone network, and utilize said retrieved selected information object at said user station.

Offline Browser

In this aspect, the invention also provides a computer- implemented offline browser system for offline browsing of locally stored Web pages, which offline browser system is suitable for distribution to a mass market of users, (or to a small group) and for operation at a local computer station, and which comprises;

- a) local content elements for at least one local Web page, said content elements being intended for storage at said local station;
- b) an offline browser to access and present said content elements via said local Web page; and
- c) a transporter, being an information transporter component, as described herein, initiatable from said local Web page, automatically to effect a dial-up connection, or its equivalent, to a desired remote information source and retrieve at least one preselected or pre-specified new content element to update or augment said local Web page;

whereby said offline browser can be utilized to access said new content elements via said local Web page and provides user interface function for such new content access. Preferably, the browser also includes conventional online browsing capabilities.

Such offline browsing in which hyperlinks may be actively pursued, may be termed "active"

offline browsing to distinguish from mere passive viewing of the content, or web pages, wherein hyperlinks are either non-responsive, or yield errors.

At least some, if not all, of the local content elements are accessed from a Web page loaded, by the local Web browser, via active screen elements such as hyperlinks, search boxes, dialog boxes, selection buttons and the like. If the local Web page is a carbon copy of a Web site page, then some or all of these active screen elements will use URLs to locate desired content elements and these URLs may point to Internet addresses such as the originating server rather than to local storage at the local station, preventing the browser from operating in the desired offline mode.

To solve this problem, the invention also provides a link manager and relocater function to adjust the hyperlink coding as needed to enable the Web browser to retrieve Web page content elements from local storage. The link manager can be either static or dynamic. A static link manager can be embodied in preprocessed Web pages or content as a simple rewriting of the original URL to a suitable local path, and filename as well, if appropriate. Such a static locator device is appropriate for a shipped product supplied on physical storage media, and may be appropriate for updates supplied via direct modem-to-modem connection or equivalent, but a dynamic locator is more flexible and can be used for content elements or pages retrieved online from one or more Web sites especially for rapidly changing or complex content and advanced functions such as searching and transaction handling. Such a dynamic locator can work with pre-existing URLs, as found on the Web site and redirect them on-the-fly to local resources. Embodiments of the invention may place this link manager/relocater at the server or at the client, and the static embodiments may be effected by either programmatic or manual procedures, as desired.

It will be understood that the above-described offline browser is quite distinct from conventional applications, including even sophisticated word processors, being distinguished, *inter alia*, by its ability to work online, when necessary, to search the Web and retrieve information objects from it, employing hypertext links to remote resources and using the Internet's Transmission

Control Protocol and Internet Protocols, or equivalents. Preferably, the local browser comprises search, display and hyperlink capabilities comparable to those provided by a conventional Web browser, with adaptations, as necessary, to enable local browsing of the content at the local station. Such adaptations may include the link manager; a local search filter for a Web search engine; and modification of an online browser to load and run locally without automatically initiating access to the Internet. In a preferred embodiment the offline browser is developed from a standard online browser product, available from any suitable source, modified and adapted as necessary to provide the offline mode functionality described herein.

However, a very simple offline browser according to the invention may eschew direct Internet online access capability and be designed to work only with locally stored Web pages, updates and new content elements being received on physical media or via a dial-up connection. Especially if the local browser and station have multimedia capabilities, and the local content elements have auto-play capabilities such as are provided by Sun Microsystems' JAVA (trademark) language, ability of the browser transparently to access multiple resources, CD-ROM, DVD (digital video disks), hard disk, etc. by simply clicking "hot button" hyperlinks can be employed in various new products. For example, a multimedia music product can combine the music with text, still pictures or video about the artist, and permit locally stored updates to be seamlessly merged with original content.

The new content element can be an update of a local content element and, preferably, is also locally stored and is transparently accessed and integrated with other local content elements for viewing or processing by the user, for which purpose the herein described user interface and database modules are those provided by the offline browser which acts in the role of a containing information product.

Richer products will provide multiple Web pages for offline use and may comprise large numbers of content elements which are updated with, or supplemented by, multiple new content

elements fetched as a package.

Such an offline browser system can be distributed by a commercial sponsor or content provider to simulate their Web site in a standalone environment without the expense, difficulty and inconvenience of establishing an Internet subscription connection for those who do not have one. To this end, selected Web site content, providing one or more pages, which may have a customized look chosen by the commercial sponsor, "local pages" hereinafter, can be supplied on physical media such as CD-ROM or diskette and updates can be automatically fetched by the transporter. The combination of offline browser and local pages may be seen to be another embodiment of the containing information product described in the parent application. The user interface, database management and other data integration functions described in the parent application are provided by the browser (augmented if necessary) , in such an offline browser embodiment of the invention.

Of course, as described above, the offline browser system can be distributed as a shell which uses the transporter to fetch completing elements and content from a remote site, via a telephone network or equivalent network. By disconnecting, automatically if so desired, when the specified information object transport operation or operations has or have been completed the transporter of the invention limits line or access charges. In contrast, with conventional online Web browsing time charges continue to accumulate while the user views or processes received material. The transporter can be repeatedly reactivated on an as-needed basis to provide intermittent communication with the remote server or servers specified or user-entered in its setup protocols, thereby simulating the ongoing, open-ended interactivity of an online connection with the remote server. Naturally, the Web site sponsor may choose to modify the local pages as compared with their Web site counterparts, for example to simplify them, or to provide access to content or function intended by the sponsor for local use only.

The local pages will normally include at least one greeting page introducing the site and providing access to its principal features or categories, and may also include many layers of

functionality and content which can be jointly or severally updated by transporter operation. Preferably, at least one local page pursuant to this aspect of the invention will be distinguished from a conventional Web page by the presence of an update function, or hyperlink, for activating the transporter to update that page or, if desired by the sponsor, to update the complete offline browser system. Different update links can employ different object manifests to use the transporter to fetch various content according to the context of the update hyperlink.

In a further embodiment, the offline browser system of the invention can be used in a larger context which combines local content stored on CD-ROM, or equivalent distributable media, (diskette or DVD for example), with additional content from a hard disk, or equivalent and with live browsing or data retrieval from a remote source, for example a Web site on the Internet, via intermittent transporter or data shuttle connections, "shuttling" herein. The inventive offline browser system can combine these resources in a coherent suite.

Thus, local Web content can be pre-distributed on CD-ROM or diskette for use with the described offline browser system. This distributed, locally stored Web content can then be combined with more current, or additional content obtained from the sponsor's Web site or other remote location by either intermittent shuttling or live continuous browsing. This allows user selection of local, intermittent or live modes, as desired, or as available at any given time and place. Providing such multiple access capabilities enables a vendor or sponsor to distribute their product *en masse* to computer owners or users with confidence that a large number of prospects can use the product easily and currently. For example, diskettes might be given away with a computer magazine to be sure of reaching a market rich in enabled prospects by any vendor willing to make the investment to reach them. A different group are prospective house purchasers, a group rich in computer owners and users, who could be given an initial diskette or CD-ROM containing a realtor's listings, and the inventive offline browser system for viewing and updating the listings from a Web site or other remote server using either the Internet or the telephone network. This method enables the prospects to browse the realtor's listings offline at their leisure, and to update it easily via either the Internet

or the telephone network, as needed. The realtor does not have to consider whether their prospect has an Internet access subscription, and the prospect does not have to worry about the difficulties and costs of attempting to download extensive listings.

Clearly, it is in the interest of both the sponsor and the user for the offline browser to work with current content elements. To obtain the benefits provided by the present invention, as it relates to browsing Web content, it is desirable for new online content to be retrieved, and stored locally so that the network connection used for retrieval may be terminated, (terminating time charges) and browsing can proceed on the local station.

Referring to Fig. 12, an offline browser 120 is shown running at a local station 122 where local content 124 is available at any of various storage media, removable or fixed, such as disk, diskette or CD-ROM. Calls handled by telephone network 125 and routed to an Internet service provider ("ISP") 130 enable the Internet 126 (or equivalent resource-rich, standardized wide area network) to be accessed by offline browser 120 via conventional online connection 128, if such connectivity is available and desired at the local station 122. A content provider maintains a Web site server 132, connected to the Internet via line 134, as a point of presence on the World Wide Web, and, additionally, a web package server 136 which is in communication with Web site server 132 and is equipped and configured for direct telephone access by users via telephone network 125 and telephone line 143. Web server 132 supplies web pages 138 to the Internet and selected Web pages or Web page excerpts are supplied to web package server 136 to serve as local pages 140. Local pages 140, with relevant Web page URLs replaced with appropriate local paths or other local resource locators, if desired, can be retrieved via dial-up connection 142, if conventional Internet access is not available or desired. Clearly, an information product's functionality or usability can be substantially enhanced by including with the local Web pages, whether supplied "over-the-wire" or on physical storage media, any applets needed to run them, for example Sun Microsystems' JAVA (trademark) applets.

Content provider 143B can thus supply local station 122 with Web pages either via online Internet connection 128, if the local station 122 has one, or via other dial-up connection 142, if the local station does not have Internet access facilities. The update can be stored locally and become part of the local content 124 where it is available for offline browsing, avoiding the costs, delays and possibly, access problems associated with online or live browsing. Preferably, the local browser provides user selection of local, intermittent or live modes, as desired, at any given time.

It will be understood that connections 128 and 142 are typically alternative uses of a single physical telephone line, and that alternatively, connection 128 could be any kind of direct Internet or other data network connection. It will also be understood that Web server 132 and web package server 136 are distinguished in their logical embodiments as distinct servers, which can be implemented either using distinct hardware and software systems, or as logically distinct elements on a single hardware platform. Also, preferred embodiments may involve continuous, real-time connection between the servers 132 and 136, for dynamic access to the Web content, or intermittent or even offline file transfer linkage, when static access is sufficient.

Sending of information from the user to web package server 136 can be accommodated, if desired, using the bi-directional capabilities of the transporter. In this case files of any type may be sent to the server 136. Thus, specific information objects including features of the offline browser and the associated HTML content, such as transmission of data entered into HTML forms, can be sent to the web package server 136, using appropriate Internet transaction protocols and associated security and payment functions as desired, as depicted by connection 150. Such a system provides a novel mechanism to support processing of forms included for example, in web packages, as described hereinbelow, that are filled out locally.

In more advanced embodiments, the linkage between web package server 136 and Web server 132 can be used bi-directionally to provide enhanced real-time services such as searching and transaction processing. For example, a response to a user's inquiry or purchase or product order,

from a remote Web site can be received by Web server 132 and relayed by the web package server 136 to be made available to the user via the dial-up path 142. Such an embodiment uses the gateway server function described in the parent application and shown as the vendor link 50 in Figure 1.

5 Thus, the novel features of providing locally browsable Web pages 140, with replaced URLs, if necessary, and web package server 136, serviced by Web server 132, as described above, enables a content provider, or sponsor to provide a valuable new service: offline Web page browsing with active hyperlinks.

10 Employing the user interfaces, database managers and API's described hereinabove, the web package can be seamlessly integrated with existing local material employing hyperlinks, if desired, for immediate cross-referencing, or cross-locating of material as between the new and locally pre-existing material.

15 It will be apparent that the UI/DB functions described for the novel offline browser could be custom built or assembled from suitable browser component toolkits, such as are beginning to appear on the market from such sources as Spyglass, and that such offline browser function can be integrated with other application functions as desired. However the wide availability and growing installed base of standard browsers from major vendors such as Netscape and Microsoft makes it
20 preferable to employ such a standard browser. In such an embodiment, the offline browser is simply a special case of a standard authoring package as described in the parent application. In many cases off-the-shelf browsers can be used effectively, and even browsers previously installed on a user station for other purposes can be employed, by exploiting standard features for extending such products, including helper applications, plug-ins, applets, and API's.

25 Briefly, such mechanisms allow a standard browser to be used to view content and select links to follow to additional content. In simple embodiments, when the link target is locally resident, it may be automatically handled by the standard browser; when it is not present, the link can,

pursuant to the invention, be coded to cause the browser to invoke the transporter as a helper application. This is described more fully in the section below headed "Link Management".

Also, if desired, local pages 140, with local resource locators, can be supplied to the Internet 126 for retrieval via online connection 128, for offline browsing, for example as an appropriately labeled offline browsing package. This feature may be particularly useful for mobile users, and the like for whom Internet service may be available or economic only on an intermittent basis. In this case content can be obtained in efficient bursts when access is available (or even on an automated, unattended schedule, when convenient or low in cost), and then stored locally for continuing use offline. Thus, the time of usage of online content is effectively decoupled from the time of retrieval of the content.

In contemplating the herein described applications of the invention to Web browsing embodiments those skilled in the art will understand that the inventive approach departs dramatically from conventional concepts of Web browsing architecture. Whereas conventional Web browsers are seen primarily as communications programs, which gain strength by using a standardized user interface and data content framework (UI/DB), the inventive approach ignores (or, when used in conjunction with live or online browsing options, downplays) the browser's role in communications, and uses a browser primarily for its UI/DB components, relying on the inventive transporter for communications. And whereas session management is open-ended and conventionally is left to the human frailties of the user, the inventive approach uses the transporter 14 to enable task-oriented session management operable in a short burst or bursts to transport pre-specified objects (whose specification may well be unknown to the user and be embedded in a hyperlink or other software element).

In addition, conventionally, helper applications, API's, plug-ins, and other browser extenders were devised primarily for addition of new content types, or enhancement of content, whereas the present invention utilizes these tools to enhance communications techniques, and enable new

communications methods.

It will be understood that short-burst access to bundled packages of content shown as using a dial-up connection 142 to reach the web package server can just as well use an Internet connection or other suitable network, as described above, and under the heading “Equivalent Networks” above, and that such embodiments may become increasingly important in the future.

Link Management

As referenced above, a problem that arises when attempting to integrate retrieved new content elements with pre-existing local content elements stored locally at the user’s station, is that, in general, the URLs associated with any hyperlinks in the new content elements fetched from an online Web site will not correctly point to the user’s local resources because, in the nature of URL’s, (and particularly “absolute URLs” as described below) they will point to a Web site, namely the site from which they were fetched, or some other Internet Web sites. This link redirection problem may arise whether or not the content comprises Web pages, and is inherent in any updatable material that employs hyperlinks where updates will not necessarily be stored in the same logical volume as the original material.

A simple solution to this problem, pursuant to the invention, provides for links to be coded as “relative URLs,” which are relative to the source location and contain only relative sub-structure detail. The links may thus remain valid if the substructure is relocated to the local station on a consistent, parallel basis, e. g. if remote pages are within a single directory, the relocated link will be interpreted as pointing to the single local directory. Thus, those elements of the path and filename(s) that are recited in the link must be present at the local station: they could be installed beforehand in an offline browser setup routine or by updates. Link coding may comprise truncation of the absolute URL to remove elements of the Web site address or other modifications as disclosed and suggested herein or as will be apparent to those skilled in the art.

While beneficial in many situations the solution of using relative URLs will not solve the more general problem of offline utilization of links to scattered source materials, including remotely stored materials, where it may be impractical to maintain the relative structure, or where “absolute URLs” may be employed at the remote source. To solve these problems the invention provides, as referenced above, a link manager to redirect or rewrite URLs as necessary for local use.

For smooth and efficient integration of the offline Web browser system with online browsing activity, it is desirable for the offline browser automatically to access the most up-to-date version of any particular content element, and if it must be retrieved from a remote source to be able to fetch it either via live browsing or by shuttle mode. Preferably, the local browser should fetch content from the network only if a local copy is no longer current. This capability requires a mechanism to check time stamps of both network and local copies. More advanced embodiments could use more complex and variable criteria for this decision, such as factors for file size, type, urgency, and connection availability, as well as relative currency.

To solve these problems the invention provides a dynamic link manager cooperative with the local browser to manage link relocations dynamically as links are activated. In preferred embodiments the link manager can operate efficiently regardless of whether content is retrieved via shuttle or live mode.

A variety of levels of sophistication in link management may be employed in embodying the invention, and depending on the functions required, link management may be static or dynamic at either the server or the user station, or both. Key factors are the dynamics of the content in terms of its frequency of change or addition, whether both shuttle and live mode are to be supported, and the extent to which a user’s local content is allowed to vary.

In maintaining proper linkage, a key concept is the idea of “working sets” of web content. Linked content constitutes a network which is a directed graph. While in general, Web content is

open and any home page may have links which lead to other links that go throughout the entire Web, actual Web sites may be limited or can be artificially limited in the scope of their links. Thus, the term “working set” is used herein to mean a set of linked objects which a user is permitted by a service, content or applications provider, to reference at a given time. This usage of the term “working set” is borrowed from the unrelated field of virtual memory management.

If the working set is kept sufficiently small, it may be practical to transmit all working set elements that have changed whenever the user requests one or more pages in the set. In this case all pages in the current working set are known to be available locally, so that links can be pre-coded at the server to point to local copies (using relative URLs, if they are not already coded in such manner). Then, desired explicit links for updates to current content, or planned extensions, can be coded to cause an intercept, and the handling of the intercept is used to invoke the transporter 14 to retrieve the update package for the working set.

More generally, where the working set is too large for complete transmission on every update, and a scheme for segmentation of the working set into smaller bundles of linked objects, called “web packages,” herein which can be obtained from the server individually, as needed, may be employed. In this case, as before, links within a web package may remain as simple relative URLs, which can be expected to work locally and can be followed by the browser without special consideration, but links from one web package to another need to be intercepted and checked to determine whether the destination object is in a local web package, and then proceed accordingly.

Pursuant to the embodiment of the invention depicted in Figure 13, the link manager comprises a link interceptor 144 cooperative with the offline browser 120 to intercept links activated by the offline browser 120 and take temporary control of the browser application thread whenever a link pre-coded as not internal to the active web package is encountered. Intercepted links are inspected to determine whether they are calling a resource available locally in another resident web package. If not, depending on the mode of access in use at the time, control is returned to the browser

120 for resource retrieval via live browse or is given to the transporter to perform a shuttle.

In a generalized embodiment, the link interceptor 144 monitors all link requests issued by the browser 120, cooperating with the browser by means of any of a variety of standard or customized mechanisms as described below, and acts or passes them according to their destinations. To effect monitoring the link interceptor 144 can operate at a relatively high level, plugging to the browser's API, assuming it to have one, although this may require some customization of the link interceptor 144 to browser 120.

If the intercepted link is determined to be calling a locally available resource, for example because it recites a filename identical with a locally stored file, it is passed to a link translator 146 to correct its destination. Control and the translated link are then passed back to the local station's offline browser 120 for completion. Preferably, the link manager includes a version comparator 148 which calls a version number, time and date stamp, or other version indicator from the original URL address on the Internet, compares same with corresponding data for the local content and processes the more current version. If necessary, the link manager can include a time and date stamp module (not shown) to label relevant links or link elements as they are received locally.

Preferably also, in applying such a scheme, the link translator 146 reads from the intercepted link sufficient information to enable lookup and translation. Translation can be effected by appropriate modifications of the URL.

Link control and interception cooperative with the local offline browser 120 can be embodied at various levels and points of control. In a simple case, all links except a single class of update link can be pre-converted to relative URLs that work without interception. Update links can be coded to cause a standard shuttle update function to be invoked, such as by invoking a packaged version of the transporter as a helper application, using a coding approach such as described below.

In a more flexible embodiment using the web package segmentation structure, web package-specific intercepts are provided and coding is applied to the links to cause the browser to transfer control for link relocation purposes when specific intercepts are encountered.

5 In an alternative embodiment of link manager which requires no inline editing of links or selective intercept control, the link interceptor intercepts all HTTP "Get URL" requests (in other words intercepts hypertext transport protocol requests to get a file based on its uniform resource locator address, which has been left in its original form) and makes a determination, based on separately maintained data, as to whether the target object is local, in which case it passes the Get URL back to the browser to execute as a local relative URL, or whether to obtain the target object via remote browsing or via transporter shuttling. Interception can be implemented using browser API functions which are commercially available in various forms including for example DDE, OLE, and Netscape Communications' "Inline Plug-Ins", or through use of proxy server functions, preferably modified for local users. Proxy servers are commonly used as intermediary servers that can redirect URL references in order to implement secure fire walls, but can also be implemented in simple form to perform a comparable redirection function running as a process on the user's machine co-operatively with the browser.

10
15
20 Conventionally, a proxy server provides a standard mechanism that implements an intercept/redirect function in the network (normally applied to the very different objective of resource hiding for purposes of security), outboard from the browser. When use of a proxy server is specified to a browser, all "Get URL" requests are directed first to the proxy server, which then looks up the proper routing and redirects the requesting browser to the actual desired URL in a two stage process. Proxy servers are usually separate shared servers performing network control functions for entire groups of users, and the desired web package storage and access management could be implemented on a similar shared basis, but this activity is typically individual in nature and thus preferably effected at the user's station. Use of a simple proxy server on the user station can be an effective mechanism for link control, if appropriately coordinated with any other uses of proxy

servers, such as for security fire walls.

Alternatively, the link interceptor 144 may operate at a much lower level and monitor suitable DOS or other operating system interrupts, such as interrupt 21 or 23, filter all browser originating resource calls, and process the filtered calls selectively according to destination, as described herein. Use of the operating system interrupts in this way may be more difficult to implement, but can provide a more universal link interceptor 144 able to work with a variety of browsers.

Link Coding

Link coding is preferably done when the web packages are built, unless live browsing is to be supported with full or substantially transparent integration of local and online resources. Links internal to a web package are left as (or converted to) relative URLs and need no intercept, although interception may be used for tracking purposes, if desired, enabling a user's "hits" on particular links to be logged and forwarded to a remote source using transporter 14. Such tracking does not require amendment or rewriting of links.

Pre-coded Web Packages

External links are coded into the web packages, before delivery, so as to be intercepted and amended or rewritten. The intercept process can be manual if static content builds are used, or semi- or fully automated, and can be varied, depending on the dynamics of content structure changes, for example, as follows:

- a) Web package definitions can be manually set up to consist of a set of objects, and this definition automatically applied to edit links in new copies of the specified pages. In this case the web package is known to consist of the pre-defined set of pages, and is thus static in page composition, but the content of those pages is dynamic, and requires dynamic link adjustment when new web package copies are built.

- b) Alternatively, procedures for automatic segmentation of content into dynamically defined web packages can be used.

Dynamic Link Coding

If live browsing is to be fully integrated then link relocation can be dynamically coded locally, as pages are received. Preferably, the web package structure is used to simplify tracking so as to have similar capability for dynamic web package definition as described in b), above. Alternatively, individually accessed pages can be tracked as single-page web packages (with any associated inline objects), and then consolidated whenever the opportunity and necessary information becomes available, such as on request, or when a web package is received that supersedes the individual page.

In a simplified embodiment of this aspect of the invention, designated pages can be retrieved one-by-one as standard pages (with associated inline objects) from any server, or servers, but managed together, as a package, by the client system at the user's station, as a defined web package object group (using separately maintained web package specification and control information) which can be termed a "virtual web package". Such a virtual web package has the benefits described herein, namely that it can be supplied by direct dial-up using batched, managed access in a short burst for subsequent offline use. However, a virtual web package will lack the packaging-related transmission efficiency of the described "real" web packages, although the need for separate prepackaging or staging of content is also avoided by way of compensatory benefit.

One way of coding a link for interception on an exception basis, such as by using a helper application is by modifying the file extension of its relative URL or local file protocol URL, although at least in some cases, steps may need to be taken to avoid destroying file functionality conferred by program-recognized extensions such, for example, as ".BMP", ".TIF", ".DXF", ".DBF", ".IDX" and the like. Simple substitution of an extension would lose the extension info, and but may be

applicable for pages which can be assumed to be written in HTML.

Thus, for example, the existing file extension of the URL in the uncoded link, whatever it might be, could be replaced with a common intercept extension, such as ".TSH", which would cause the coded link call to be intercepted for rewriting when that link were activated by the user. Clearly, multiple coded extensions could be devised to serve a variety of purposes, including, perhaps, usage tracking. This extension-based coding approach is convenient for simple embodiments in which the intercept mechanism is invoked by a special-purpose module or application, analogous to (though providing different functionality from) the commonly available mechanism of a "helper application" which is typically used to invoke viewers for special file types. The inventive use of a helper application mechanism to manage communications while using the browser for viewing is in some senses a reversal of its conventional use.

To retain extension functionality and support more general absolute URLs, a preferred coding practice pursuant to the invention, is to append to the coded link, after the URL's intercept extension, one or more additional legal URL coding characters such as "#" (used for tags within pages) followed by the original URL, with its functional extension. Thus "image.bmp" could be coded as *image.tsh#bmp*, or more generally, for *http://host/path/image.bmp*, as *linker.tsh#http://host/path/image.bmp*. The URL coding character would be ignored by the browser, but would be accessible to the link manager which can delete the URL coding character and the intercept extension, rewrite or amend the URL and return it to the browser for execution, with its original extension intact. It will be understood that starting after the initial "#", all "/" and other special characters (such as "#" for a real tag) must be coded in the form of their hexadecimal equivalents using the standard URL escape characters, in the form "%00", where "00" is the equivalent hexadecimal code, in order to conform to the rules for a legal file protocol URL.

A more preferable alternative means or module to cause or identify exception intercepts is a module that uses a special protocol designation to cause the linker to be invoked as a protocol

handler, such as *tsh://image.bmp*, or more generally *tsh://host/path/image.bmp* in cases where the browser allows addition of new protocol handlers, as some recently available versions do. This scheme can also be useful in embodiments where all URLs are intercepted.

5 To effect URL translations, the link translator preferably comprises a separate set of lookup tables. In addition to specific or wild card designations of original URLs, or URL classes, against corresponding new URLs or URL classes, separate lookup tables enable efficient tracking of link status, time and date stamps, and other relevant link data, and also facilitate grouping of translations and status by web package for transport with a web package as a web package list, providing an integrated product. Such a mechanism also facilitates the selection of a variety of Web pages from a Web site with properly managed links. It is not necessary to modify all local references to a newly supplied web package in advance: the links can simply be intercepted and the web package list consulted live. Alternatively, the coded URL may carry with it a web package identifier for an entire update or extension web package instead of or in addition to the specification of a specific target URL, depending on the variety of access modes and richness of content structure to be supported.

Such mechanisms are very effective for what might be regarded as passive content such as text, images and even multimedia retrieved by the user for independent use at their local station, but greater difficulties may arise with dynamic, changeable content, for example cases of client-server interaction needed for forms handling, searches image map selections, JAVA (trademark) applets and push-pull content.

To carry out these dynamic activities locally or in shuttle mode the invention provides local simulation of the server functionality to complete the interaction. As an alternative, a special server connection can be employed to effect the necessary server interaction in a short, automated session. Such innovations are believed feasible but some limitation of functionality may be desirable. Forms can be included in web packages as blanks, and sent in to the server when filled out. Searches can be passed as standard Web searches, or selected result pages could be included also to avoid a

subsequent reconnect. Image maps can be converted to local image maps and push-pull can be facilitated with local scripting, as desired. JAVA applets and live objects, such as director movies should run satisfactorily locally given necessary browser support.

5 Other schemes for coding links to achieve the purposes of the invention will be apparent to those skilled in the art who will also understand the value of the novel link coding capability of the invention in enabling many useful applications, including web packages with active hyperlinks, as described.

10 Web Package Utility

Such novel web packages in turn can stimulate a variety of new applications and ways of using Web content or other material compatible with Web standards, especially when combined with the transporter of the invention into automated web package transport embodiments. For example, ready access to web package content furnished by a sponsor from a remote server using the transporter for user-driven dial-up retrieval of the content can introduce non-Web users to Web content and attract them to online services, adoption of which can be facilitated by incorporation of a Web or Internet access provider's subscription package (or enabling shell) in the Web package.

20 Web Page Caching

It will be understood by one skilled in the art, that the link management modules and methodology of the invention, and its application to web packages, as described, are quite unlike conventional web page cache managers commonly used by browsers temporarily to hold recently accessed pages at the local station for subsequent quick access. Conventional local Web page cache managers are not presently standardized, making it difficult to communicate therewith via an extension module such as the inventive component for direct dial-up access and suffer from the drawbacks that communications access is assumed to be readily available at all times, to replace or

add pages, and cached objects are automatically purged under simple policies such as "least-recently-used". Thus the content of conventional Web page cache managers is transient in nature rather than persistent and the cache managers are unsuitable for effecting the offline browsing and other link management functions of the invention, as described above. Furthermore, such conventional Web page cache managers currently neither offer nor can readily be extended to support the required set of link management and relocation features described herein.

Nevertheless, in one preferred embodiment of the invention, a conventional Web page cache manager can be used to enhance the invention, for example, in a case where the browser (and associated cache) is custom built for use in online and shuttle mode, or where an adequately featured cache facility is standardized and generally available across a useful population of browsers. For these purposes, the conventional browser preferably provides, or can be extended to provide the necessary functionality, and offers a suitable API or other control interface, to manage the local objects.

As noted hereinabove, it will be understood that the described approach to link management applies to remote hyperlinked content in general, whether based on current URL usage or current or future variants, extensions or other equivalents of URLs. This includes object-oriented approaches to the handling of hyperlinks using object containers for URLs or other hyperlinks, such as those known in the art as "monikers".

While described to serve the purposes of offline browsing, it will be apparent that the described link management features of the invention can be employed in other situations where it is desired to redirect links.

Link Management Applications

The ability to manage links as described herein, enables a number of new Web capabilities

to be provided, serving various recognized and previously unrecognized needs. Properly implemented, using the teachings of the invention, a user can smoothly interwork local, shuttle and live modes for static content formats, for example HTML, images, multimedia and the like. Some applications of the link management aspects of the invention to filling these needs will now be described while others will be apparent to those skilled in the art, or will become apparent as the art develops.

Content Archiving and Relocation

The link interceptor function can be modified to perform many other valuable functions to add value to the basic hypertext functions provided by the standard network protocols. For example, current protocols provide no facility to deal with links which point to content which has been moved or deleted, or which reference a server that is no longer maintained to be accessible on the network, or which is other wise unavailable: they simply cause an error message to be displayed when such an "empty" link is selected. As at the date of this application such empty links are a relatively minor nuisance. However, their proliferation will become increasingly problematic as linked content developed by uncoordinated and perhaps undisciplined sources grows and evolves. Eventually these empty links could seriously impede Internet traffic, like so many parked cars on the highway. A proposed solution yet to be standardized by the Internet Engineering Task Force involves the use of new forms of link specification which embed indirect but permanent Uniform Resource Names instead of URLs, but this is some time off because of complex policy issues, and has the drawbacks of requiring changes to embedded pointers in existing content, and imposes a relocation overhead on every access. A stopgap approach similarly based on embedding indirect links, called Persistent URLs, has recently been proposed by the Online Computer Library Center, but has similar weaknesses.

Pursuant to an extended embodiment of the invention, browsers can be modified, using the various browser modification or extension facilities described herein, or their equivalents, to provide

a solution to this problem that needs no change to current content and imposes overhead only on an exception basis.

Thus to solve the problem of “empty” links the invention provides a modified browser including a link management module to react to messages generated by failure of a link owing to an inadequate response from its destination by calling an enhanced version of the link interceptor module, which includes one or more link search components which is invoked to seek to alternative locations for the desired content, or an explanation of its unavailability, and then provide an adjusted link pointer back to the browser for presentation to the user. As time passes the number of aged or obsolescent links must be expected to become quite voluminous, spawning the need for a link relocation or archive server to maintain the alternative location or explanatory data needed by link search components at the browser. The invention includes such a link archive server as well as modified browsers, as described, intended to work cooperatively therewith, whether in online or offline mode.

A variety of computer-implemented software mechanisms can be used by such a link archive server to provide an archiving and relocation service, pursuant to the invention. Preferably, one or more special-purpose archive and relocation servers is set up to maintain relocation information and, optionally, copies of the “lost” content from the empty links. A link interceptor module at the user’s station cooperative or integral with their browser, is configured to query the relocation servers with a failing URL, and receive or retrieve a response containing a corrected URL, if known. Thus, for example, if a page at

http://server1.com/path1/page1.htm

was not found, the link interceptor could be configured to query either

http://archive.com/relocator?server1.com/path1/page1.htm, or

http://relocator.archive.com/server1.com/path1/page1.htm

as a first relocation server to be checked.

5 Information on such relocations could be submitted to the relocation server through various means, and an active "spider" process could be applied, being initiated, for example, from the relocation server, to monitor the structure of the Web and detect changes. The spider would save the content or preferably a short coded signature for each page, and then on subsequent scans, would identify relocated pages, using the saved content or signatures, and note the new addresses for responding to inquiries from the link interceptor. Preferably, any relocations that were uncertain would be flagged with a coding that would allow the viewer to be warned of the possibility of error. Such archive servers could also offer an optional repository service for useful pages no longer maintained (or maintained in some new location) by the original source or sponsor. The relocation and archive servers could be maintained as a for-fee service, or sponsored through various mechanisms including advertising, as are search sites, currently.

Where feasible for content servers which remain operative but have content that has been moved or deleted, an alternative, and perhaps more desirable method, of implementing such relocation functions would be at the content server, preferably by convention. Thus, for example, a server could add a basic relocation server function for pages that had previously been available from that server. Thus, for example, if a page at

http://server1.com/path1/page1.htm

was not found, the convention could be to query either

http://server1.com/relocator?path1/page1.htm, or
http://relocator.server1.com/path1/page1.htm

as a first relocation server to be checked.

Screening

5 The link interceptor module, when configured to intercept all or selected external links or Get
URL requests enables user activity to be screened so that undesired requests can be denied or filtered
out. Such a screening process can be used to prevent users retrieving inappropriate content, for
example content judged indecent or obscene, or from competitors Web sites, so long as an address,
or URL, for that content is known. If the user attempts to get an URL on the excluded list, "Object
10 Not Available" can be returned.

15 The link interceptor module can access a list or table of excluded addresses which may be
maintained locally or accessed at a remote site, the access or a periodic refresh can of course be
effected by transporter 14, if desired. Where a third party, for example the Internet Service Provider
("ISP" herein) can furnish descriptive classifications of site content, by address or URL, as being
indecent, violent, politically incorrect or the like, and password coded setup routine can also be
provided enabling a supervisor of the local station to filter out certain categories of content. Thus,
a parent can use a password, or multiple passwords to control what content their children view.

20 It will be appreciated that the link management, intercept and relocation aspects of the
invention, and the concept of relative URLs while being particularly advantageous in assisting the
implementation of offline browsing, as described herein, can be beneficial independently of the use
of transporter 14, for example to enable offline browsing independently of dial-up updates or to
enable an URL-driven content screening module which could be a freestanding software component
25 or program implemented at the user's station to screen the user's activity or at the ISP to screen or
censor all link calls from the ISP's customers, or elsewhere, as will be apparent to those skilled in
the art.

Web Package Assembler

The invention also provides a computer-implementable web package assembler enabling sets or packages of Web pages, as described hereinabove, to be assembled into useful web packages from content available at diverse locations on the Internet. A key component of such a web package assembler is a link relocation module to rationalize all hyperlink references within the package, for local browsing.

Other useful components which can be included in such a novel web package assembler are a selection tool, a retriever and a package assembler. The selection tool specifies the desired content ingredients of the web package in a manner susceptible to search and applies criteria to select suitable content elements from an existing content set which may be as diverse as a single database or directory of data or all Web site data available on the Internet. The retriever applies the selection tool over the content set to gather content elements for the web package, or alternatively to gather a superset of content elements from which the web package can be assembled.

The package assembler uses the selection tool to assemble a desired specific package or web package from the content elements generated by the retriever. These tools will now be described in more detail.

Web Package Selection Tool

A preferred web package selection tool provides a time-optimized selection process to economize on connection charges and which uses a focused methodology to achieve a brief connection. Because of the vastness of the World Wide Web, and the extent of its content, it is important that the selection tool apply a range of filters or selection criteria with optional specification or customization or plug-in control of parameters for content, source, quality, style and other parameters that will be apparent to those skilled in the art. A particularly desirable feature is

an option for explicit specification of desired content known to exist on the Web, for example Web pages previously visited, and preferably means (e.g. drag-and-drop, paste-and-copy, or a separately windowed routine employing a file manager) are provided to facilitate such desired content specification for example by posting respective URLs from the user's hotlists, cache of visited sites, vendor- or sponsor-supplied list or other offline (or online retrievable) source of URLs of potential interest.

The objective is to build a coherent package comprising a hyperlinked collection of content elements retrieved from multiple Internet (or other appropriate dispersed source) locations, the content elements being handled and built in an environment of their original HTML or other standardized language, without requiring conversion to proprietary application formats. Options for offline testing of a search query built from multiple parameters, are desirable, where feasible, to avoid unnecessary or excess connection time.

Retriever Tool

The retriever tool uses the search tool and crawls across the Web, like a Web spider, to locate and retrieve desired or suitable content, based on defined criteria, in HTML format.

The analogies to a spider web and references to a Web spider and Web crawling are used to denote an organized search of Web sites involving visits to those sites rather than merely scanning the content of one or more search engines. Clearly, a comprehensive search of the content available at any and all Web sites is a time-consuming project. Crawling techniques can also include the pursuit of hyperlinks to relevant content, and other techniques, as are known to those skilled in the art.

Such a combined search-and-retrieve tool set can be used for other hyperlinked, searchable content bases, as desired.

Package Assembler

5 The package assembler provides assembly of desired retrieved content elements into desired web packages combining them with any applets required to run, display or otherwise use particular content, or any other appropriate accessories.

Link Relocation Tool

10 The link relocation tool operates like the link relocation module described hereinabove to effect appropriate changes in links in the retrieved content. The link relocation module provides functionality to adjust hyperlink references in the retrieved content elements to point to other elements within the web package or, as appropriate, to point to other content elements in separate web packages which may also be retrieved, or otherwise to be rewritten or redirected, as described above. Proper resolution of links enables the tools to be used for managed retrieval of related packages as sets, rather than as individual pages as in conventional Web browsing.

15 Appropriately used, these tools enable the building of a web package, of multiple pages from diverse locations, to be automated, combining Web crawling under specified search constraints.

20 While these tools will clearly have utility at the user's station, a preferred embodiment of the invention locates them on a web package server accessible to users by direct dial-up connection. If desired, the web package server can be provided with facilities dynamically to assemble batches of content elements into standardized or customized web packages. Standardized web packages might
25 for example be news items for a trade news letter that have been located at and retrieved from a number of sites relevant to activities in the trade, are distributed to a population of users, whereas customized web packages, which are preferably dynamically assembled upon request, are intended for an individual, or small group of users, meeting their specific content requirements.

The application of this package assembler, and in the case of dynamic web package construction, its use in conjunction with the above searching and gathering activities impose novel design constraints in that packages to be transmitted must preferably be compact, and any content gathering done in real time must preferably be done in a way that minimizes call duration. This affects decisions as to how to search, which items to select, and in what form to present the results. For example, size may become a parameter in determining which search results to remit to the requester. The issues and solutions of these decisions will generally be apparent to one skilled in the art, but may vary from those typical in conventional online searching situations, as will be apparent from the teachings herein. For example, when web package construction is dynamic it will typically be desirable to apply a caching facility to keep frequently requested pages or sets of web package elements available at the web package server in order to keep access and assembly time to a minimum.

Short-burst Connectivity

By efficient management of the communications process, the invention enables calls to be terminated when pre-specified information object transfers have been satisfactorily executed, and furthermore enables the complete call process from dial-up to hang-up to be dedicated to automated fulfilment of the user's instructions in a single short burst connection the duration of which can be optimized by the transporter-related functions described herein. This efficiency is in contrast to a typical online session where the connection can remain open, running up time charges, while the user reads and thinks about each page retrieved (or is interrupted or performs other tasks), and long after data transfer has ceased, unless the user alertly disconnects. It is typical for such "think" time to be 10-20 times greater than the actual communication time. In addition, the compression and object packaging or bundling features of the transporter can enable still greater efficiency in communications as compared with conventional Internet or other online access, which typically retrieves uncompressed pages or messages, one at a time by enabling compressed data transport to be implemented transparently to the user.

E-mail Retrieval

In a simple example, new e-mail may be retrieved and browsed while still online, with a meter running, whereas retrieved new mail could be browsed just as effectively off-line. Employing the inventive transporter, with suitable adaptations at the host server, the user can fetch a manifest of new mail, edit the manifest, if desired, fetch the new mail and automatically disconnect or, alternatively, disconnect a first e-mail service and call up one or more other such services, in a substantially automatic manner once configured.

Similarly, the inventive transporter can be used to access bulletin boards and pull-down objects relating to particular content threads of interest to the user.

Known, special purpose e-mail readers for short burst access to specific e-mail and bulletin board systems are special-purpose modules configured to fetch only mail objects addressed to the calling user, not objects specified in a manifest, and thus are not suitable for broadcast information object distribution, or publication. Unlike the manifest employed in the present invention, any list of files attached to an e-mail does nothing to provide for further action upon receipt of the listed files nor, because it is embedded in the e-mail message, can it be employed by a user, information product, or remote server to specify files or objects to be fetched. Nor do such e-mail readers comprise separable software transporter components applicable to general-purpose automated information object transport via managed dial-up connections. The ability to optimize the communications process and automatically terminate it with a disconnect for an arbitrary variety of application content, including Web browsing and searching, uniquely disposes the inventive systems to provide a novel, general purpose short burst data retrieval facility for off-line users as described herein, which is quite different from the limited dedicated functionality of e-mail readers.

Short burst connectivity can simulate an online environment by coupling a transporter with one or more hyperlinks, hot buttons or menu selectors enabling a user to effect multiple or repeated

data retrieval operations in short bursts from one or more remote sources, by clicking on links and hot buttons while they browse. In special cases, where a dial-up source for the destination information object of the hyperlink is known to be available, a translation or readdressing module could automatically post appropriate header and other retrieval data from hyperlinks in imported content to the transporter and create a manifest for fetching the object from the dial-up source, enabling an online environment to be simulated. Such application of an intermittent, short-burst connectivity approach to browsing and searching of relatively extensive content (such as collections of Web pages) is quite distinct from conventional Web browsing and searching activities which function as a fully online, continuously interactive process. Absent the teachings herein, conventional wisdom would expect the inventive approach to be unduly static and limiting of interaction.

With present-day modems, some delay occurs in the dialing and handshake process which slows the dial-up communication process and may somewhat hinder simulation of an online environment. Advancing technology may reduce these problems increasing the usefulness of the invention. Connections via ISDN are established much faster, while connect time appears at present to be significantly more costly. Accordingly, short burst embodiments of the invention have particular application to use via ISDN networks where retrieval of cumbersome graphics, video and multimedia files may be important. The transporter can readily be adapted to offer a scheduling function providing users with an option to effect retrieval of bulky objects at an off-peak low rate or low traffic time, such as at night.

Using such short burst data retrieval, a user can interact off line, seamlessly merging retrieved data or objects with local data or objects, in a rich and varied environment which may simulate an online session, without the expense and inconvenience that sometimes accompanies extended online sessions. In many instances, for example domestic environments, freeing up a telephone line will be an important benefit, especially to teenage computer users whose parents require a single phone line to be available. These benefits of short burst communication, with minimal use of phone lines, accompanied by off line browsing, are of particular value in the case of interactive digital music

CDS, for example, as supplied under an industry standard, or agreed format, such as Music Enhanced CD. Application of the invention to this environment will be described in more detail below.

5 The short burst access characteristics of the invention may be of particular value to mobile users who often do not have suitable access to adequate communications facilities. Wireless links are relatively expensive and slow, and while improving, can be expected to remain more costly and lower in speed than wireline service. The ability to concentrate activity into short, efficient bursts, and to pre-position selected working sets of current content such as price lists and documentation in a portable system can be of great value to salesmen, field workers, and computer-using working travelers of all kinds.

10 It will be apparent that applications of short-burst, intermittent connection can be extended to provide broad support for content searching, and for efficient packaging and transmission of the resulting content, as well as for transaction processing in general, as referenced above, for example by automating and managing communication with a remote search engine. In doing so, the implementation details of the transporter functions and interfaces would preferably be tuned and adapted as appropriate to efficiently and effectively serve the particular purposes addressed by various useful sub-classes of applications, as will be understood by one skilled in the art from the
20 teachings herein.

Transaction processing

25 As described in the parent application, the invention provides a flexible vehicle for transaction processing in many different ways via both real time gateway connections and non-real time store-and-forward linkages. Such transactions can be EDI-compliant, or use other remote-ordering protocols for real or de facto standards including HTML forms and Sun Systems JAVA (trademark) applets, and gain the benefits of short-burst communication optimized for reduced

communication time. In this manner the benefits of the inventive transporter can be obtained in a way that interworks with and applies useful portions of transaction control, user interface and security software infrastructure that may be available for use at the user and transaction server ends of the transaction chain.

5

Moving web packages in or with a transporter, both as described pursuant to the invention, creates what may be termed a “web package shuttle”. With the short-session and simple connection advantages the invention provides, a powerful general purpose transaction processing capability is enabled having advantages similar to those described for information transport. Such a transaction processing mechanism can adopt any other relevant aspects of the invention described herein including intermittent or short burst repeated connections, gatewaying between a vendor or sponsor’s server or a special purpose server and a Web server or Internet point of access so long as HTML form-based transactions, or their equivalent, are supported. Store and forward is also useful in this context so that many transactions can be collected on a special-purpose server for later processing elsewhere.

Interactive Music Products

The Music CD Extra format is a standard supported by Microsoft, Sony, Philips and other industry leaders for a class of high quality recorded audio products distributed on CD with CD-ROM compatible user, multimedia-capable interactivity, enabling users to enhance the music experience (stored in ANSI standard CD audio “red book” format, playable on standard CD audio players) with suitable ancillary content such as liner notes, pictures, video clips, artist data, lyrics, discography, concert schedules, fan club information and so on (encoded in CD-ROM compatible ANSI standard “yellow book” format, playable on standard CD-ROM players).

Variant combined formats have seen limited use, and all of these are collectively referred to as Enhanced CDS. Comparable standards and formats promoting interactive environments for

recorded products may be expected for other media and products, for example video products and DVDs, as well as High Density CD, the DVD-based follow-on format for CD audio and CD-ROM.

Such interactive music products may also include online links to the Web or other online services. However, to the inventor's knowledge and belief available products provide or require traditional open-ended online sessions with their associated drawbacks.

The invention provides a novel interactive recorded music product comprising, stored on distributable physical media, a music recording and an information transporter as described herein, coded for automated communication with a pre-specified remote content source, particularly, but not exclusively, a digital music CD, which preferably also includes supplemental interactive capability relevant to the music recording.

Typically, the remote content comprises ancillary content as described above. The remote source preferably comprises a server maintained on behalf of a vendor or sponsor of the music product accessed by direct dial to a number stored or retrievable via a number stored, by or for, the transporter. In a preferred embodiment, a commercial vendor or supplier of the music product maintains a server with ancillary content of interest to purchasers of the music product and preinstalls the transporter with an 800 or ordinary phone number providing automated access to that server. Either in the original product or in an object automatically fetched by the transporter, a content list of available choices can be provided, enabling the user to select desired objects to be fetched. When the selected object or objects has been satisfactorily retrieved, the transporter or an associated user interface, either terminates communications or gives the user the option to transport another object to or from the remote source.

Alternatively to direct dial access to a vendor-maintained remote server, the transporter can be coded to access the Web or equivalent online network, via an access provider, to retrieve one or more specified information objects from the Web using an URL, and to terminate the online session

after receipt of the specified objects. If desired after retrieval of an object via the online network, confirmation, or other data can be returned to a predesignated server via direct dial to that server, bypassing the online network.

5 A music industry application of the invention can thus embody the inventive offline browser system described above, as a music supplementer system, particularly adapted to the requirements of Music CD Extra and Music Enhanced C D formats providing useful benefits to users lacking online subscriptions.

10 The music supplementer system ("MSS" herein) can comprise an offline browser system with direct-dial support, a local browser-viewer module with HTML Web page viewing functionality, and preferably with a base set of content elements in HTML format with optional selections of standard Web content or other material for example Adobe's ACROBAT (trademark) or other viewers. The base content elements can conform to an enabling specification appropriate to the MSS and can include any desired content, for example, a basic home page, a tour schedule page, a multi-media download page, a fan club page, a merchandise page, a news page and an artists or other artists page. Preferably, any links on these pages are edited, modified or managed for local execution as described herein. Such pages can be functionally modified versions of online available Web pages, as described above. Key functions can be controlled and customized using HTML pages, or in other appropriate ways, while the invocation of control functions can be done by intercepting links employing a helper application, or via API or viewer customization or other means as described hereinabove.

20 Various special- purpose useful links can be provided, for example, a "Get Update" link in a home page that refreshes base content by retrieval from a remote source and provides specified optional elements.

Links to optional items for download can trigger transporter functions, as described, to fetch

the optional item object if it is not present locally or can simply invoke the object, or a viewer for the object, if it is present locally. Such objects could, for example, include audio or video samples.

Transaction pages, simulating actual Web pages, if desired, can be provided to trigger sends to a remote server to enable joining a fan club, or ordering merchandise, or other user-initiated transaction. Simple transporter send functions can be used for information submission, such as product registrations, and server response and gateway functions can be employed when a response or confirmation is needed.

A user control facility to edit a fetch and send list for the transporter activatable from any desired page can also be provided.

A client system content control component or function, to be implemented at the user's station, to track the presence and status of information objects on the user's storage facilities , including any CD-ROM and hard disk can be provided to control link execution and editing, along with a link manager, as described.

Online Network Charging Mechanism

A drawback of a distributed online network, such as the Internet, which lacks central administration is the difficulty of implementing convenient charging mechanisms. Telephone networks provide a number of charging options, notably, caller-paid charges, collect calls which reverse charges to the called party, subject to the called party's selective approval; sponsor-paid 800- and 888- calls where all calls are paid by the called party; and caller-paid 900- calls which provide for revenue splitting between the telephone company and the called party.

Such services are not generally available on the Internet. Credit cards are now being widely used on the Internet, although some people have lingering security concerns. However, though useful

for major purchases, credit cards are not suitable for small time-related charges and do not offer a medium enabling sponsors to provide free access. Standard Internet charging methods require establishment of a subscription with an access provider such as one of the major online services, for example CompuServe and America Online, or with one of the specialized Internet service providers, and generally include usage (time) related charges (either explicitly or implicitly). This approach has the drawbacks described above for casual, first-time and occasional users and limits the marketing uses of the Internet.

Networks managed by centralized service providers for example SPRINTNET or BT TYMNET (trademarks), offer systems enabling such networks to simulate some telephone network charging capabilities. Thus the X.25 standard for packet switching networks provides reverse charging options and a call-negotiation process that determines whether a called server or host will accept collect calls. A caller or user must supply a billed account ID and password for caller paid charges or may be furnished with a special reverse-charge account ID and password.

X.75 standards permit call negotiation and reverse charging mechanisms to be applied across interconnections between individual X 25 networks , allowing some global coordination. Internet protocols do not provide for such call negotiation and charging management. The packet-switched X.25 model does not appear to solve the problem of overcoming the access providers charges and formalities that impede novices and casual users and prevent true, casual sponsor-paid access by any modem-equipped computer user to the sponsor's Internet site, because it is specific to the X.25 protocol and no provision for an equivalent capability is provided for in the Internet protocol.

To solve these and other problems, the invention provides an Internet charging mechanism, including computer-implemented enabling software, in the form of a charge-management module to be applied as a higher level protocol above the enabling online network protocol such for example as the Internet TCP/IP protocols. The charge-management module preferably comprises user, server and access point components operated at the nodes or points of access to identify collect and other

calls at each access point, to provide session-negotiation functions and to determine if a called server will accept charges before a call is completed. Hosts that accept collect calls can have an option of selectively controlling access to specific account IDs.

5 User components of the charge management module preferably include a user interface button or other selection requesting sponsored access to a resource and which is effective to activate the charge management mechanism on the network, or such requests could be an automatic default, or implied by the URL specified. The access point module can collect usage data for calls made via the access point operator and generate bills and call details for the sponsor. The sponsor or server component screens and authorizes or rejects call requests received from the access point. The details of this process could be specific to a single ISP to work among users and servers directly connected to its network only, but preferably a common coordinating mechanism analogous to X.75 could be used by a large number of cooperating ISPs.

10 900 - number equivalent revenue-collecting functionality can be provided by means of a billing gateway server established to manage session setup for revenue-generating calls using specially charged account IDs. The billing servers can allocate a caller's account and credit status, identify the pricing algorithms to be applied for the called server, and maintain an activity record for end-user billing.

20 Such increased flexibility in charging can enhance and facilitate widespread use of the Internet for both short-burst connectivity applications and for fully online applications. Coupled with the capabilities of the inventive transporter, such novel charging mechanisms can enable new Internet (or other online network) market services such, for example, as allowing non-subscribing
25 users to obtain free sponsored service, or to obtain service-for-fee on a discrete, ad-hoc, time-of-need basis.

Intermittent Web Searching

Searching of the Web, or Internet, or other adequately standardized wide area network replete with data sources, can be understood and accomplished using the transporter as a special case of transaction handling, using similar mechanisms to those described above for transaction handling. Thus, a search request is simply a send transaction to a search engine, which responds with a fetch object (also referenced as a "response object" in the parent application) comprising a result list or hit list of objects found to match the search, which is then returned to the user, at which time a disconnection can be made. This result can then be used as normal hyperlinked content to obtain the actual target objects in a subsequent request, or a revised search transaction can be submitted. In a similar manner to what was described in relation to browsing, the effect of an ongoing interactive session for searching and transactions can be simulated by a series of short burst transporter-implemented connections .

This intermittent mode of searching can be further exploited using techniques such as those described in the parent application for combining indexes or other content into a single seamless search. As described, an index (or content set) on CD-ROM could be supplemented by an updated supplementary index (or content set) that had been subsequently retrieved to hard disk. It will be apparent that the searching-as-transaction approach can be used in the same way to supplement information already retrieved. For example, a search of content on CD (and hard disk) which is current as of a given date can be supplemented by a search transaction requesting the same search, and additionally specifying that the results be limited to content with a date more recent than that given date. In this way, only the new items not already present would be retrieved, for optimum efficiency in search and transmission time. The result can then be merged with the local results to produce a fully current, complete result (again sorted in whatever order is desired). This approach permits very significant benefits, for example in the case of the searching of general purpose Internet indexes such as YAHOO or LYCOS (trademarks), where repeated identical searches may be done weeks or months apart, with redundancy in all but the most recent results, only the incremental

content need actually be obtained and transmitted. Since much Internet activity consist of just such searches, the processing and communications cost savings are potentially very sizeable. Widespread adoption of such connect-time optimized search techniques could even help economize on Internet traffic.

Back Channel for Interactive Systems

A further valuable application of the information object transporter of the invention is to enable a novel interactive communications system by providing back-channel communications via dial-up connections from a population of users to a broadcaster distributing analog or digital material over a one-way primary channel, such as TV air, cable or satellite or data subchannels. Employing a configuration as described in Level 1, this is primarily a send application, where users send objects such as a customer service responses, video program requests, or the like back to the broadcaster, or a vendor coupled to the broadcaster, by dial-up, or equivalent, over a telephone or equivalent point-to-point network.

Optionally, the inventive transporter may be used to fetch objects communicated over the primary broadcast channel. In this case the active request for a fetch object in the manifest could be effected in various ways depending on the nature of the network and the request. If the request were for a standard object scheduled for transmittal via the primary broadcast channel, the transporter would simply request of the local broadcast interface that the object be provided when received. Custom broadcast transmissions could be first requested via a send through the back channel as described above. It will be understood that fetched objects may be transmitted over either channel, with the best choice depending on the characteristics of the network (including any local station addressability characteristics), the content, and the traffic patterns.

Web Publishing

Prior to the date of this application, the concept of publishing on the Web has become a commonplace. Publication is achieved simply by posting a Web page or pages at a Web site where any Web user is free to examine the posting. In addition, it may be assumed that one or more search engines will eventually locate the content, leading interested browsers to the site, and links leading from other Web sites may be set up. Unlike publication in the more commonly understood sense of mass distribution of copies of a document or other work, Web publication is passive in nature: a single copy of the work, assembled according to Web standards, is posted for browsers to read and copy, rather like a document in a library.

Thus, a would-be Web publisher merely has to prepare their content and post it to a suitable site. Since Web sites are computer servers located remotely from the ordinary user or browser, and an ordinary user may have difficulties in mastering the complexities of transmitting files to such a server, it will be apparent that the inventive transporter provides an excellent means of facilitating the transport of documents or other objects from their would-be publishers with local, modem-equipped computer stations, to a Web server via direct dial up connection, using any appropriate ones of the tools and architectures described herein. Equally, the transporter can be used to shuttle acknowledgment and other publication confirmation details back to the originating user. In such an application users will typically have basic Internet connectivity, and this will preferably be employed by the transporter. A benefit of using the transporter is simplification of the transaction for both the user and the service provider.

Thus the transporter can provide an automatic upload including connection, interaction with a user interface to enable selection of files for Web publication; execute a send to load the content to a Web server, a logically distinct server which may be accessed via a distribution server, as described herein, and, if desired, submitted to a search engine via a gateway connection, also as described.

New or improved electronic information products are made possible by the novel information transporter disclosed herein, for example, CD-ROM-based products updated from online services, updatable periodical magazine collections, catalog-based computer shopping with order entry and optionally, order confirmation.

5

Recently Contemplated CD-ROM Products Updatable from Online Services

A CD-ROM-based product with online service updatability called "**MICROSOFT Complete Baseball**" (MICROSOFT is a trademark) was announced by Microsoft Corporation apparently on March 1, 1994, with a June 15, 1994 availability date. A product brochure received by the present inventor on April 26 describes a multimedia history of baseball which can be updated with daily scores from an online service, by modem. Nothing in the sales materials suggests any separable information transport components marketable for use with other information products.

In late April 1994, **CompuServe®** (trademark) online information service announced plans for a CD-ROM information product to be used in conjunction with its online service. The CompuServe® CD-ROM information product online service is usable only with that service, and requires users of its online component to be CompuServe® member/subscribers, on terms such as described above, which terms restrict the CD-ROM product's marketability. The CD-ROM content and user interface is limited to that provided by CompuServe®. Accordingly, such a dedicated CD-ROM service is not a satisfactory solution to independent publishers looking for economical update means, because they will be limited to whatever user interface and data management flexibility the online vendor may provide which will substantially restrict any creative look-and-feel identity the publisher may have provided in their own product. Thus the CD-ROM product is described by CompuServe® in the statement: "It is, essentially, a new window on CompuServe..." This product description does not suggest an ability to obtain updated online information for integrated local, offline use with an original information product stored on the CD-ROM, as is provided by the present invention.

In addition to CD-ROM-based products, various new information distribution methods and services are made possible by embodiments of the present invention. The object source can be a remote server equipped with a cooperative communications module closely molded to work effortlessly with the information transporter for distributing objects to a wide base of users. Such a remote server can be linked to a vendor or gatewayed to other information object sources or electronic publishers, and exploit its smooth and efficient information transport capabilities to act as a distribution point for such vendors, sources or publishers.

Thus, the invention further comprises such a special-purpose server designed for use with the novel information transporter and the special-purpose server can be established as a distribution service for publishers who incorporate the information transporter in their products. The invention also provides a method of operating a server to provide such a software service and server-enabling software.

While an illustrative embodiment of the invention has been described above, it is, of course, understood that various modifications will be apparent to those of ordinary skill in the art. Such modifications are within the spirit and scope of the invention, which is limited and defined only by the appended claims.

1. A method for controlling a user station configured for communications with a multiplicity of independently-operated data sources via a non-proprietary network, comprising:

5

automatically transporting desired data determined to be available from each of the selected data object sources to the user station.

3. The method as set forth in Claim 1, wherein the automatically polling operation is performed in accordance with a separate, user-modifiable schedule for each of the selected data object sources.

5. The method as set forth in Claim 1, wherein the desired data at each of the selected data object sources comprises news updates.

7. The method as set forth in Claim 1, wherein the desired data at respective ones of the selected data object sources comprises software updates to respective ones of multiple software

8. The method as set forth in Claim 1, wherein the desired data at respective ones of the selected data object sources comprises updates for respective ones of multiple software products installed on the user station.

10. The method as set forth in Claim 1, wherein the user interface presents the user with a list of available data object sources to choose from.

12. The method as set forth in Claim 1, wherein the automatically polling operation is performed by automatically effectuating a separate communication session with each of the selected data object sources.

14. The method as set forth in Claim 13, wherein the object manifest is generated through an application programming interface based upon input of the user via the user interface.

-106-

station performs the automatically polling and automatically transporting operations.

16. The method as set forth in Claim 15, wherein the user interface is provided by the transporter software.

17. The method as set forth in Claim 15, wherein the user interface is provided by a higher-level software entity.

18. The method as set forth in Claim 17, wherein the higher-level software entity includes an HTML-capable viewer.

19. The method as set forth in Claim 15, wherein the transporter software includes an HTML-capable viewer.

20. The method as set forth in Claim 15, wherein the transporter software is embedded in a higher-level software entity.

21. The method as set forth in Claim 20, wherein the higher-level software entity provides the user interface.

22. The method as set forth in Claim 21, wherein the higher-level software entity includes an HTML-capable viewer.

23. The method as set forth in Claim 1, wherein the automatically polling operation is performed by automatically effectuating a separate communication session with each of the selected data object sources in accordance with a separate polling schedule for each of the selected data object sources.

25. The method as set forth in Claim 1, wherein the automatically polling and transporting operations are performed in accordance with an object manifest that includes at least an address of each of the selected data object sources, an identification of the desired data at each of the selected data object sources, and a respective polling schedule for each of the selected data object sources.

27. The method as set forth in Claim 25, wherein the respective polling schedule for each of the selected data object sources can be different.

29. The method as set forth in Claim 1, wherein the automatically polling operation is performed by automatically effectuating a separate communication session with each data object source in accordance with a user-modifiable polling schedule for that data object source.

30. The method as set forth in Claim 1, wherein the automatically polling operation is performed by automatically effectuating a separate communication session with each data object source in accordance with a polling schedule for that data object source that is specified by that data object source.

31. The method as set forth in Claim 25, wherein the respective polling schedule for each of the selected data object sources is specified by the respective data object source.

32. The method as set forth in Claim 25, wherein the respective polling schedule for each of the selected data object sources is user-modifiable.

33. The method as set forth in Claim 1, wherein the automatically polling and automatically transporting operations are performed without any user action or intervention.

34. The method as set forth in Claim 1, further comprising automatically storing the transported desired data on a persistent storage medium at the user station.

35. The method as set forth in Claim 1, further comprising automatically storing the transported desired data in a designated storage location on a storage medium at the user station.

36. The method as set forth in Claim 1, further comprising automatically storing the transported desired data on a storage medium at the user station.

37. The method as set forth in Claim 36, further comprising automatically integrating the desired data stored on the storage medium into at least one existing product installed on the user station.

38. The method as set forth in Claim 37, wherein the at least one existing product includes a database product.

39. The method as set forth in Claim 37, wherein the at least one existing product includes a software product.

40. The method as set forth in Claim 37, wherein the at least one existing product includes an information and/or software product.

41. A method for controlling a user station configured for communications with a multiplicity of independently-operated data sources via a non-proprietary network, comprising:

providing a user interface to enable a user at the user station to select multiple ones of the multiplicity of independently-operated data object sources;

5 automatically effecting respective communication sessions with each of the selected data object sources; and

automatically fetching desired data from each of the selected data object sources during each of the respective communication sessions.

42. The method as set forth in Claim 41, wherein the respective communication sessions are effected in accordance with a separate schedule for each of the selected data object sources.

43. The method as set forth in Claim 42, wherein the separate schedule for each of the selected data object sources is user-modifiable.

44. The method as set forth in Claim 42, wherein the separate schedule for each of the selected data object sources is specified by the respective data object source.

45. The method as set forth in Claim 42, wherein the separate schedule for each of the selected data object sources can be different.

46. The method as set forth in Claim 41, wherein the non-proprietary network is the Internet.

47. The method as set forth in Claim 41, wherein the desired data at each of the selected data object sources comprises news updates.

48. The method as set forth in Claim 41, wherein the desired data at respective ones of the selected data object sources comprises updates to respective ones of multiple publications.

49. The method as set forth in Claim 41, wherein the desired data at respective ones of the selected data object sources comprises software updates to respective ones of multiple software products.

50. The method as set forth in Claim 41, wherein the desired data at respective ones of the selected data object sources comprises updates for respective ones of multiple software products installed on the user station.

51. The method as set forth in Claim 41, wherein the desired data at each of the selected data object sources comprises updates for a single product installed on the user station.

52. The method as set forth in Claim 41, wherein the user interface presents the user with a list of available data object sources to choose from.

53. The method as set forth in Claim 41, wherein the user interface presents the user with a menu of available data object sources to choose from.

54. The method as set forth in Claim 41, wherein the automatically effecting respective communication sessions and fetching operations are performed in accordance with an object manifest that includes at least an address of each of the selected data object sources and an identification of the desired data at each of the selected data object sources.

55. The method as set forth in Claim 54, wherein the object manifest is generated through an application programming interface based upon input of the user via the user interface.

56. The method as set forth in Claim 54, wherein transporter software installed on the user station performs the automatically effecting respective communication sessions and fetching operations.

57. The method as set forth in Claim 56, wherein the user interface is provided by the transporter software.

58. The method as set forth in Claim 56, wherein the user interface is provided by a higher-level software entity.

59. The method as set forth in Claim 58, wherein the higher-level software entity includes an HTML-capable viewer.

60. The method as set forth in Claim 54, wherein the transporter software includes an HTML-capable viewer.

61. The method as set forth in Claim 56, wherein the transporter software is embedded in a higher-level software entity.

62. The method as set forth in Claim 61, wherein the higher-level software entity provides the user interface.

63. The method as set forth in Claim 62, wherein the higher-level software entity includes an HTML-capable viewer.

64. The method as set forth in Claim 41, wherein the automatically effecting respective communication sessions and fetching operations are performed in accordance with an object manifest that includes at least an address of each of the selected data object sources, an identification

5

of the desired data at each of the selected data object sources, and a respective fetching schedule for each of the selected data object sources.

65. The method as set forth in Claim 64, wherein the respective polling schedule for each of the selected data object sources can be different.

66. The method as set forth in Claim 64, wherein the respective polling schedule for each of the selected data object sources is specified by the respective data object source.

67. The method as set forth in Claim 64, wherein the respective polling schedule for each of the selected data object sources is user-modifiable.

68. The method as set forth in Claim 41, wherein the automatically effecting respective communication sessions and fetching operations are performed without any user action or intervention.

69. The method as set forth in Claim 41, further comprising automatically storing the fetched data on a persistent storage medium at the user station.

70. The method as set forth in Claim 41, further comprising automatically storing the fetched data in a designated storage location on a storage medium at the user station.

71. The method as set forth in Claim 41, further comprising automatically storing the fetched data on a storage medium at the user station.

72. The method as set forth in Claim 71, further comprising automatically integrating the fetched data stored on the storage medium into at least one existing product installed on the user station.

73. The method as set forth in Claim 72, wherein the at least one existing product includes a database product.

74. The method as set forth in Claim 72, wherein the at least one existing product includes a software product.

75. The method as set forth in Claim 72, wherein the at least one existing product includes an information and/or software product.

76. Software stored on a computer-readable storage medium at a user station configured for communications with a multiplicity of independently-operated data sources via a non-proprietary network, comprising:

an interface function that provides a user interface to enable a user at the user station to select multiple ones of the multiplicity of independently-operated data object sources to be polled;

a polling function that automatically polls each of the selected data object sources in order to determine availability of desired data at each of the selected data object sources; and

a transport function that automatically transports desired data determined to be available from each of the selected data object sources to the user station.

77. The software as set forth in Claim 76, wherein the polling function automatically polls in accordance with a user-modifiable schedule.

78. The software as set forth in Claim 76, wherein the polling function automatically polls in accordance with a separate, user-modifiable schedule for each of the selected data object sources.

79. The software as set forth in Claim 76, wherein the non-proprietary network is the Internet.

80. The software as set forth in Claim 76, wherein the desired data at each of the selected data object sources comprises news updates.

81. The software as set forth in Claim 76, wherein the desired data at respective ones of the selected data object sources comprises updates to respective ones of multiple publications.

82. The software as set forth in Claim 76, wherein the desired data at respective ones of the selected data object sources comprises software updates to respective ones of multiple software products.

83. The software as set forth in Claim 76, wherein the desired data at respective ones of the selected data object sources comprises updates for respective ones of multiple software products installed on the user station.

84. The software as set forth in Claim 76, wherein the desired data at each of the selected data object sources comprises updates for a single product installed on the user station.

85. The software as set forth in Claim 76, wherein the user interface presents the user with a list of available data object sources to choose from.

86. Software stored on a computer-readable storage medium at a user station configured for communications with a multiplicity of independently-operated data sources via a non-proprietary network, comprising:

an interface function that provides a user interface to enable a user at the user station to select multiple ones of the multiplicity of independently-operated data object sources;

a communication function that automatically effects respective communication sessions with each of the selected data object sources; and

a fetch function that automatically fetches desired data from each of the selected data object

87. The software as set forth in Claim 86, wherein the communication function automatically effects the respective communication sessions in accordance with a user-modifiable schedule.

89. The software as set forth in Claim 86, wherein the non-proprietary network is the Internet.

91. The software as set forth in Claim 86, wherein the desired data at respective ones of the selected data object sources comprises updates to respective ones of multiple publications.

93. The software as set forth in Claim 86, wherein the desired data at respective ones of the selected data object sources comprises updates for respective ones of multiple software products installed on the user station.

-116-

5

5

5

5

5

5

5

5

5

5

102. The user station as set forth in Claim 96, wherein the desired data at respective ones of the selected data object sources comprises software updates to respective ones of multiple software products.

103. The user station as set forth in Claim 96, wherein the desired data at respective ones of the selected data object sources comprises updates for respective ones of multiple software products installed on the user station.

104. The user station as set forth in Claim 96, wherein the desired data at each of the selected data object sources comprises updates for a single product installed on the user station.

105. The user station as set forth in Claim 96, wherein the user interface presents the user with a list of available data object sources to choose from.

106. A user station configured for communications with a multiplicity of independently-operated data sources via a non-proprietary network, comprising:

means for providing a user interface to enable a user at the user station to select multiple ones of the multiplicity of independently-operated data object sources;

means for automatically effecting respective communication sessions with each of the selected data object sources; and

means for automatically fetching desired data from each of the selected data object sources during each of the respective communication sessions.

107. The user station as set forth in Claim 106, wherein the respective communication sessions are automatically effected in accordance with a user-modifiable schedule.

108. The user station as set forth in Claim 106, wherein the respective communication sessions are automatically effected in accordance with a separate, user-modifiable schedule for each

of the selected data object sources.

109. The user station as set forth in Claim 106, wherein the non-proprietary network is the Internet.

110. The user station as set forth in Claim 106, wherein the desired data at each of the selected data object sources comprises news updates.

111. The user station as set forth in Claim 106, wherein the desired data at respective ones of the selected data object sources comprises updates to respective ones of multiple publications.

112. The user station as set forth in Claim 106, wherein the desired data at respective ones of the selected data object sources comprises software updates to respective ones of multiple software products.

113. The user station as set forth in Claim 106, wherein the desired data at respective ones of the selected data object sources comprises updates for respective ones of multiple software products installed on the user station.

114. The user station as set forth in Claim 106, wherein the desired data at each of the selected data object sources comprises updates for a single product installed on the user station.

115. The user station as set forth in Claim 106, wherein the user interface presents the user with a list of available data object sources to choose from.

5

5

FETCH/SEND FLOW

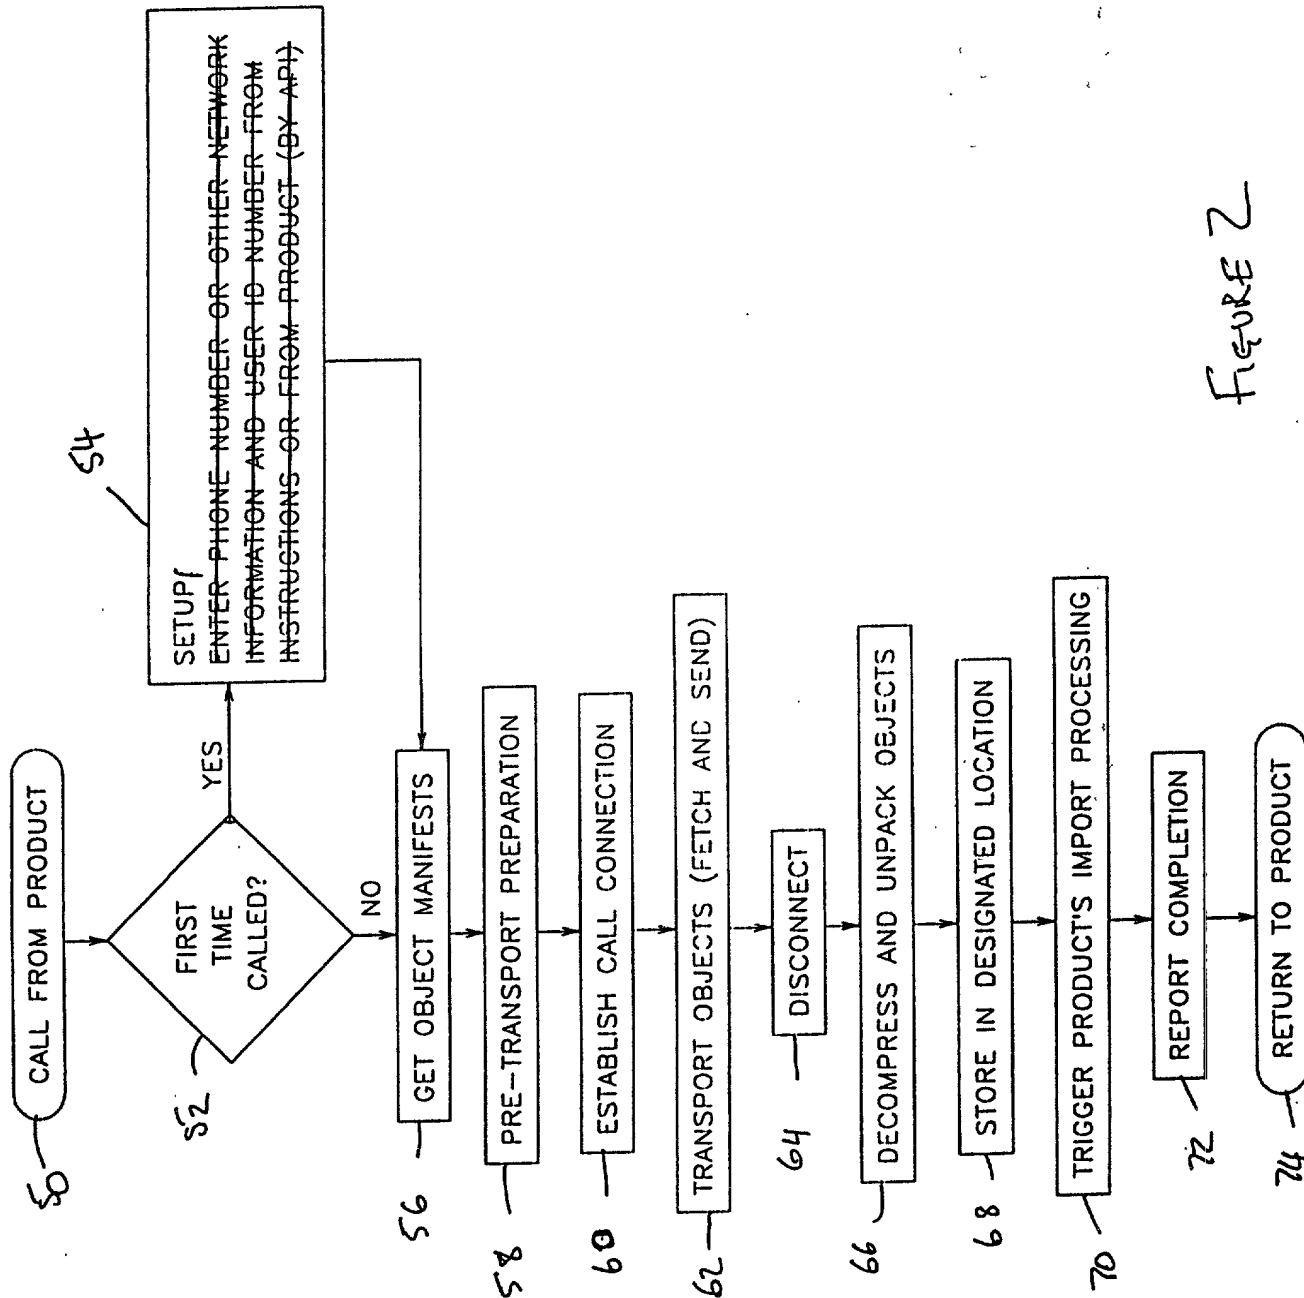


FIGURE 2

000240" 2909560

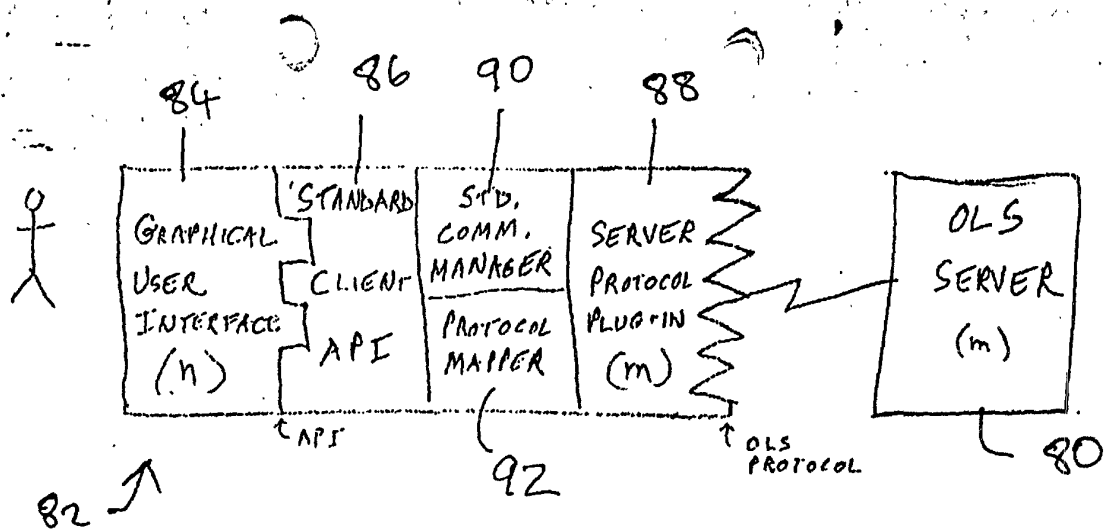


FIGURE 3

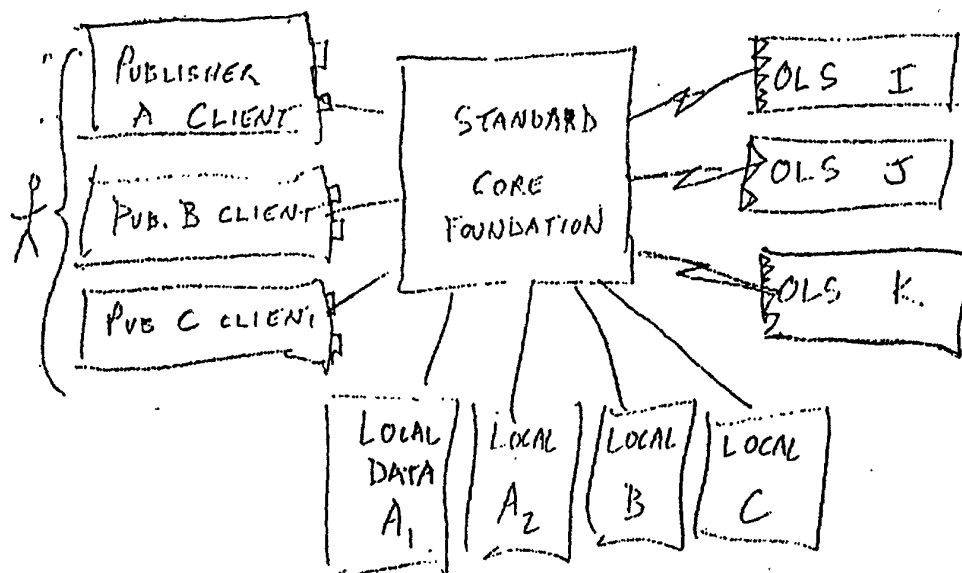


FIGURE 4

TIME

104

PRE-TRANSPORT
PREPARATION

COMMUNICATIONS

PRODUCT 102

ACTIVATE

COMM. PRODUCT

SPECIFY CALL
ROUTE

SPECIFY OBJECTS
AND TRANSPORT

DEACTIVATE
COMM. PRODUCT

STORE AND PROCESS
FETCHED PRODUCT

106

ESTABLISH CALL

CONNECTION

TRANSPORT

OBJECTS

DISCONNECT

SERVER 22

SERVER FETCH -
SEND PROTOCOL 44

Figure 5

USER 100

PRIOR ART


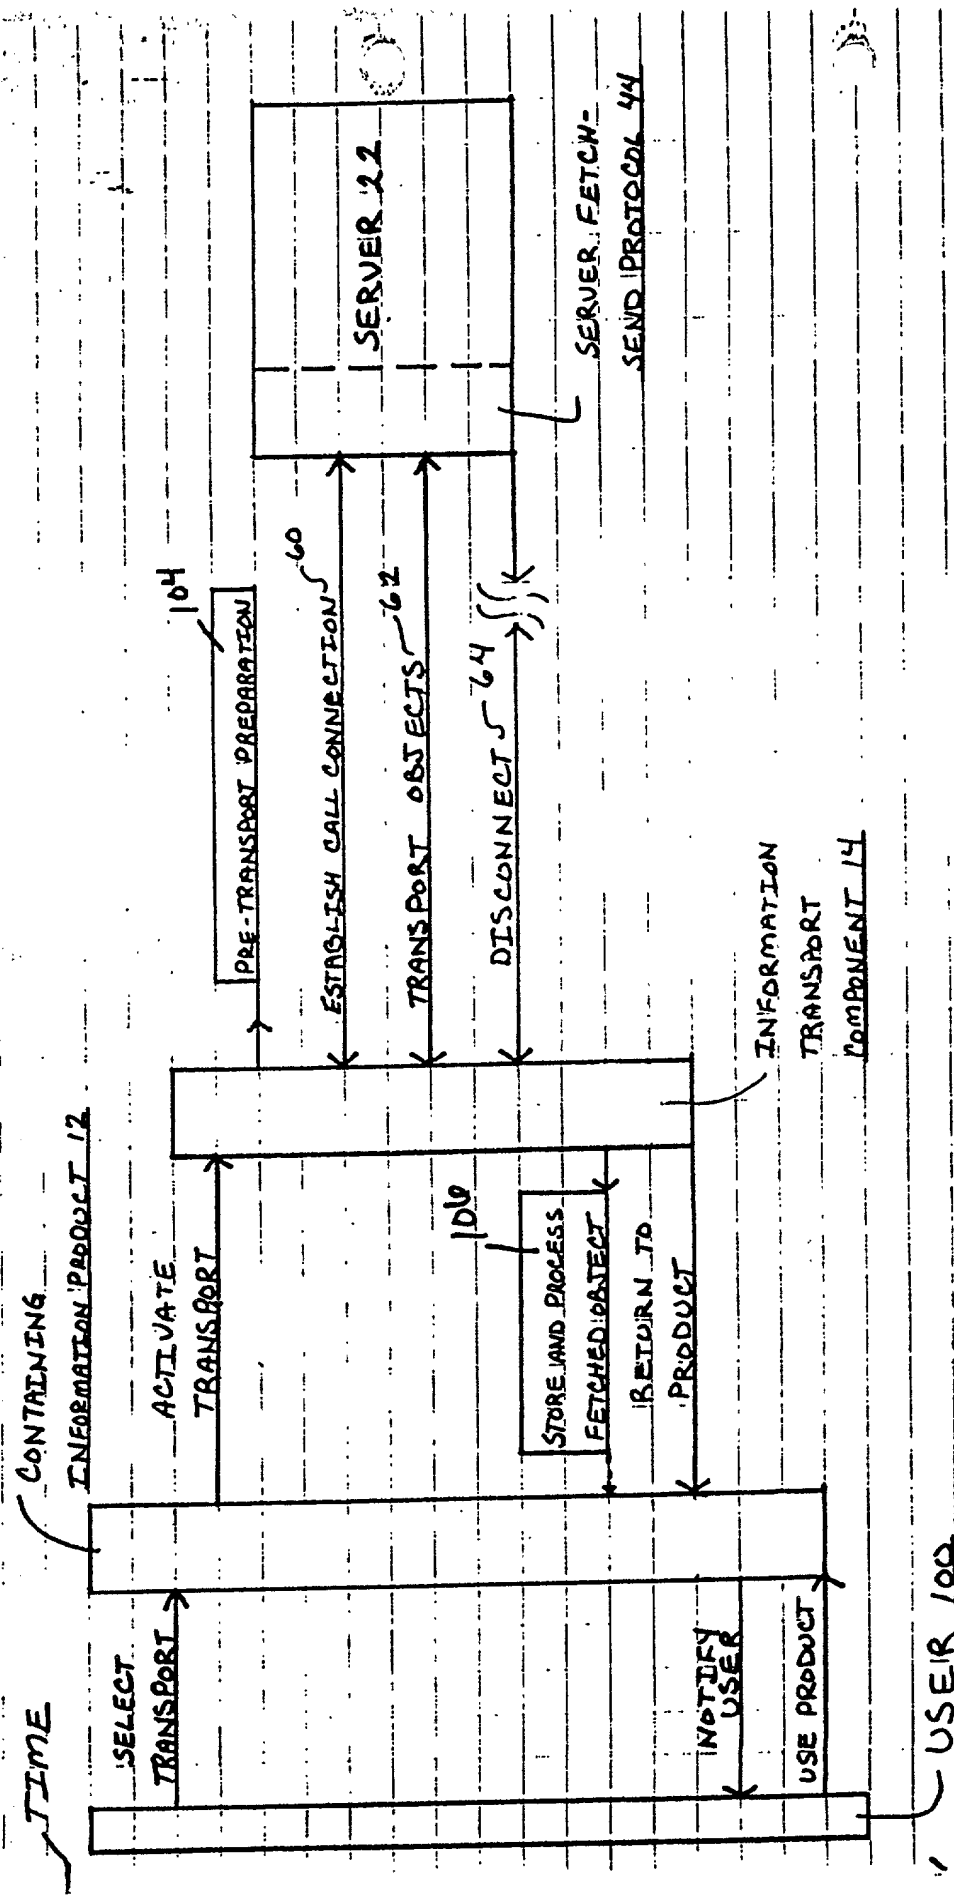



Figure 6

FIG. 7

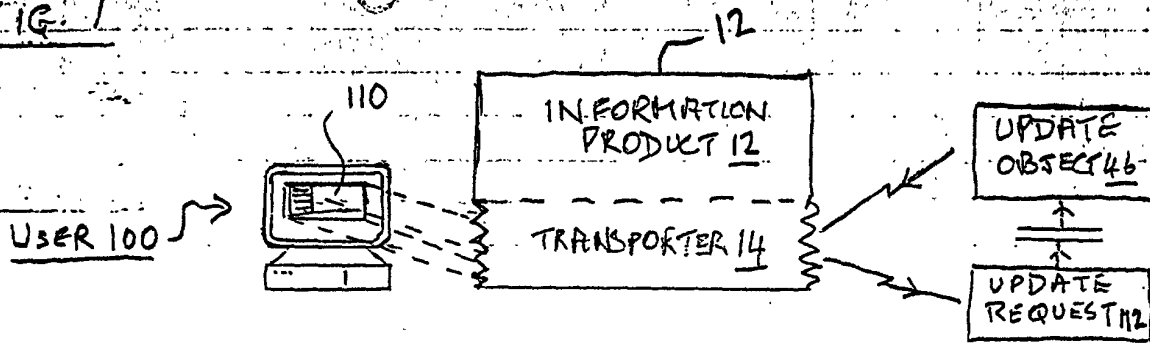

LEVEL 0 BASIC OBJECT RETRIEVAL

FIG 8

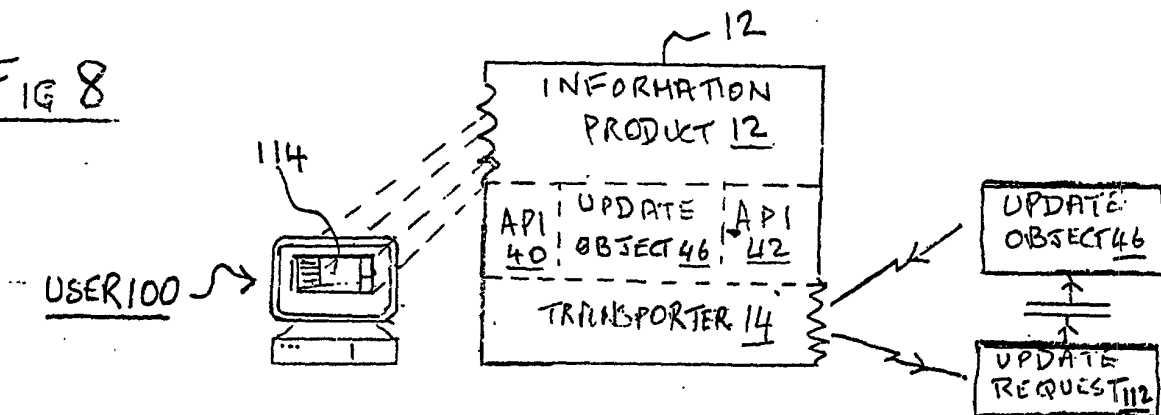


LEVEL 1: PRODUCT-INTEGRATED INTERFACE

0955062-04000

FIG. 9

LEVEL 1 - SERVER ENHANCED

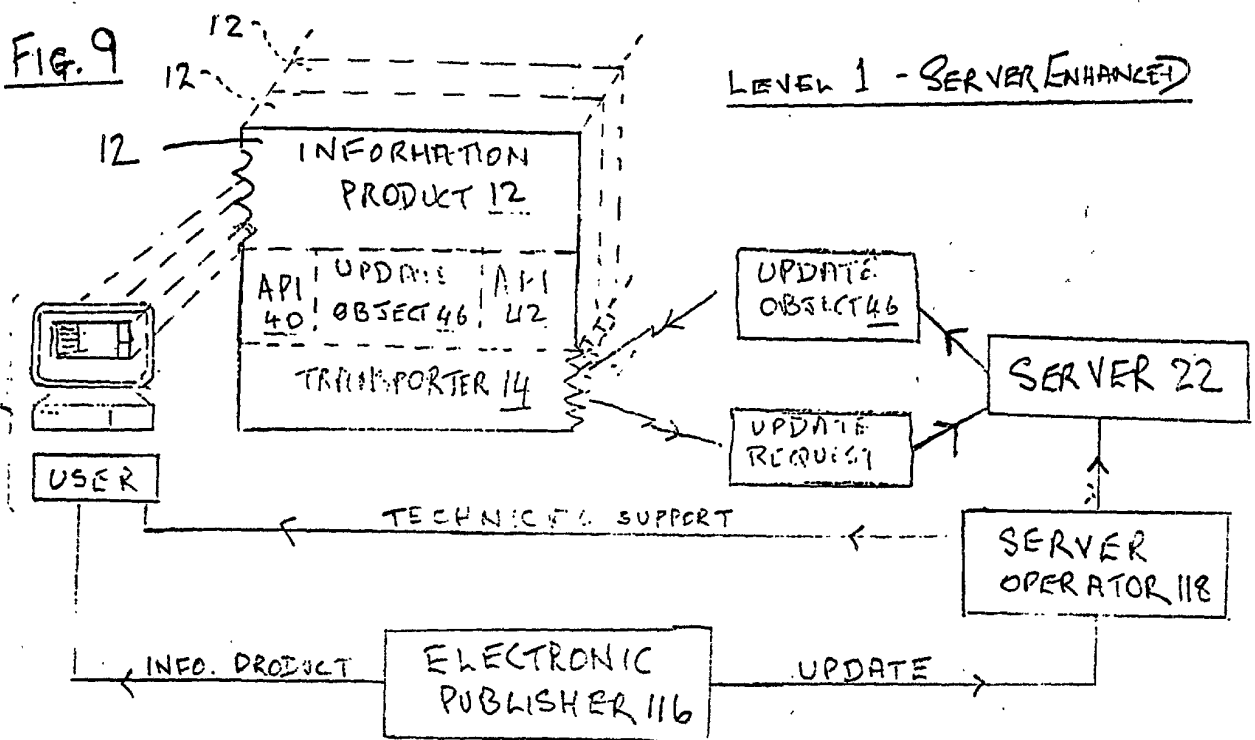

0055062-042000

Variable	Mean	Standard deviation	Minimum	Maximum
Age	35.2	10.5	20	65
Gender	0.45	0.50	0	1
Marital status	0.60	0.49	0	1
Education	12.5	1.5	9	16
Income	15.2	5.8	5	35
Health status	0.75	0.43	0	1
Employment status	0.80	0.41	0	1
Home ownership	0.65	0.48	0	1
Vehicle ownership	0.55	0.50	0	1
Life satisfaction	4.2	1.8	1	7
Life expectancy	78.5	5.2	65	95
Healthcare expenditure	12.8	4.5	5	25
Life expectancy at birth	75.2	4.8	60	90
Life expectancy at age 65	15.5	3.5	5	25
Life expectancy at age 75	8.2	2.5	2	15
Life expectancy at age 85	3.5	1.5	0	8
Life expectancy at age 95	1.2	0.8	0	3
Life expectancy at age 100	0.5	0.5	0	1
Life expectancy at age 105	0.2	0.4	0	1
Life expectancy at age 110	0.1	0.3	0	1
Life expectancy at age 115	0.05	0.2	0	1
Life expectancy at age 120	0.02	0.1	0	1
Life expectancy at age 125	0.01	0.05	0	1
Life expectancy at age 130	0.005	0.02	0	1
Life expectancy at age 135	0.002	0.01	0	1
Life expectancy at age 140	0.001	0.005	0	1
Life expectancy at age 145	0.0005	0.002	0	1
Life expectancy at age 150	0.0002	0.001	0	1
Life expectancy at age 155	0.0001	0.0005	0	1
Life expectancy at age 160	0.00005	0.0002	0	1
Life expectancy at age 165	0.00002	0.0001	0	1
Life expectancy at age 170	0.00001	0.00005	0	1
Life expectancy at age 175	0.000005	0.00002	0	1
Life expectancy at age 180	0.000002	0.00001	0	1
Life expectancy at age 185	0.000001	0.000005	0	1
Life expectancy at age 190	0.0000005	0.000002	0	1
Life expectancy at age 195	0.0000002	0.000001	0	1
Life expectancy at age 200	0.0000001	0.0000005	0	1


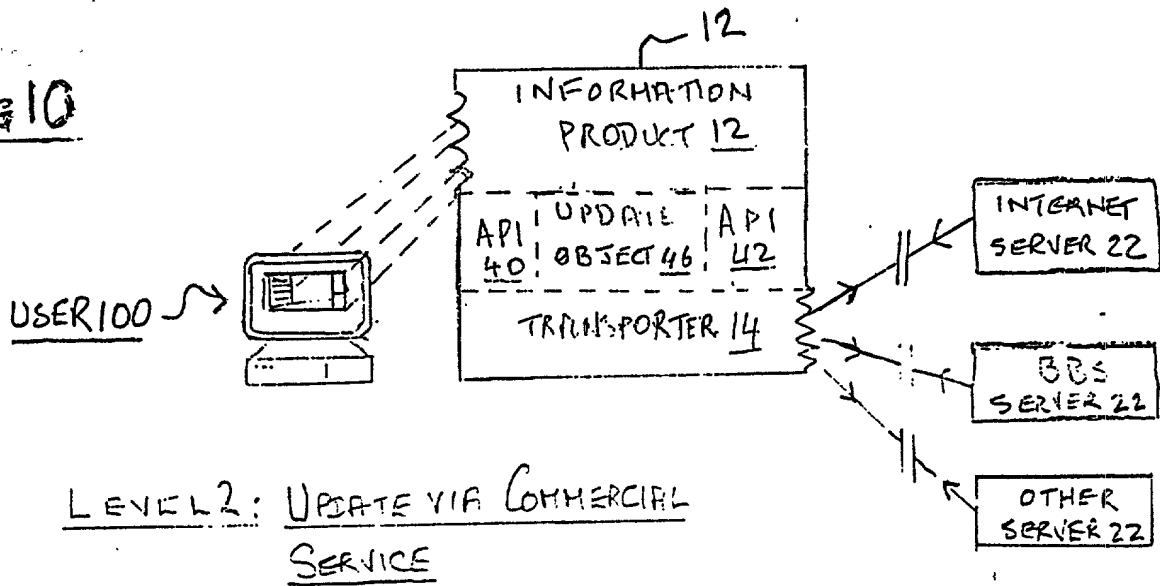


Fig. 11

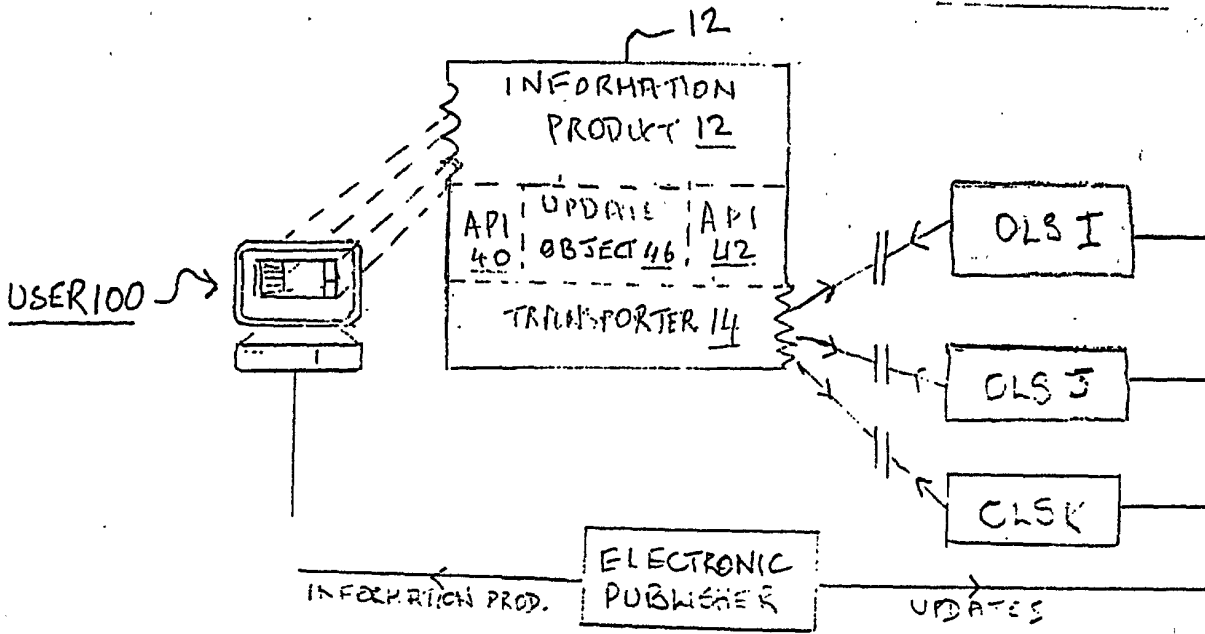

LEVEL 3: MULTIPLE SERVICE ROUTES

000240" 2909550

000240" 2909550

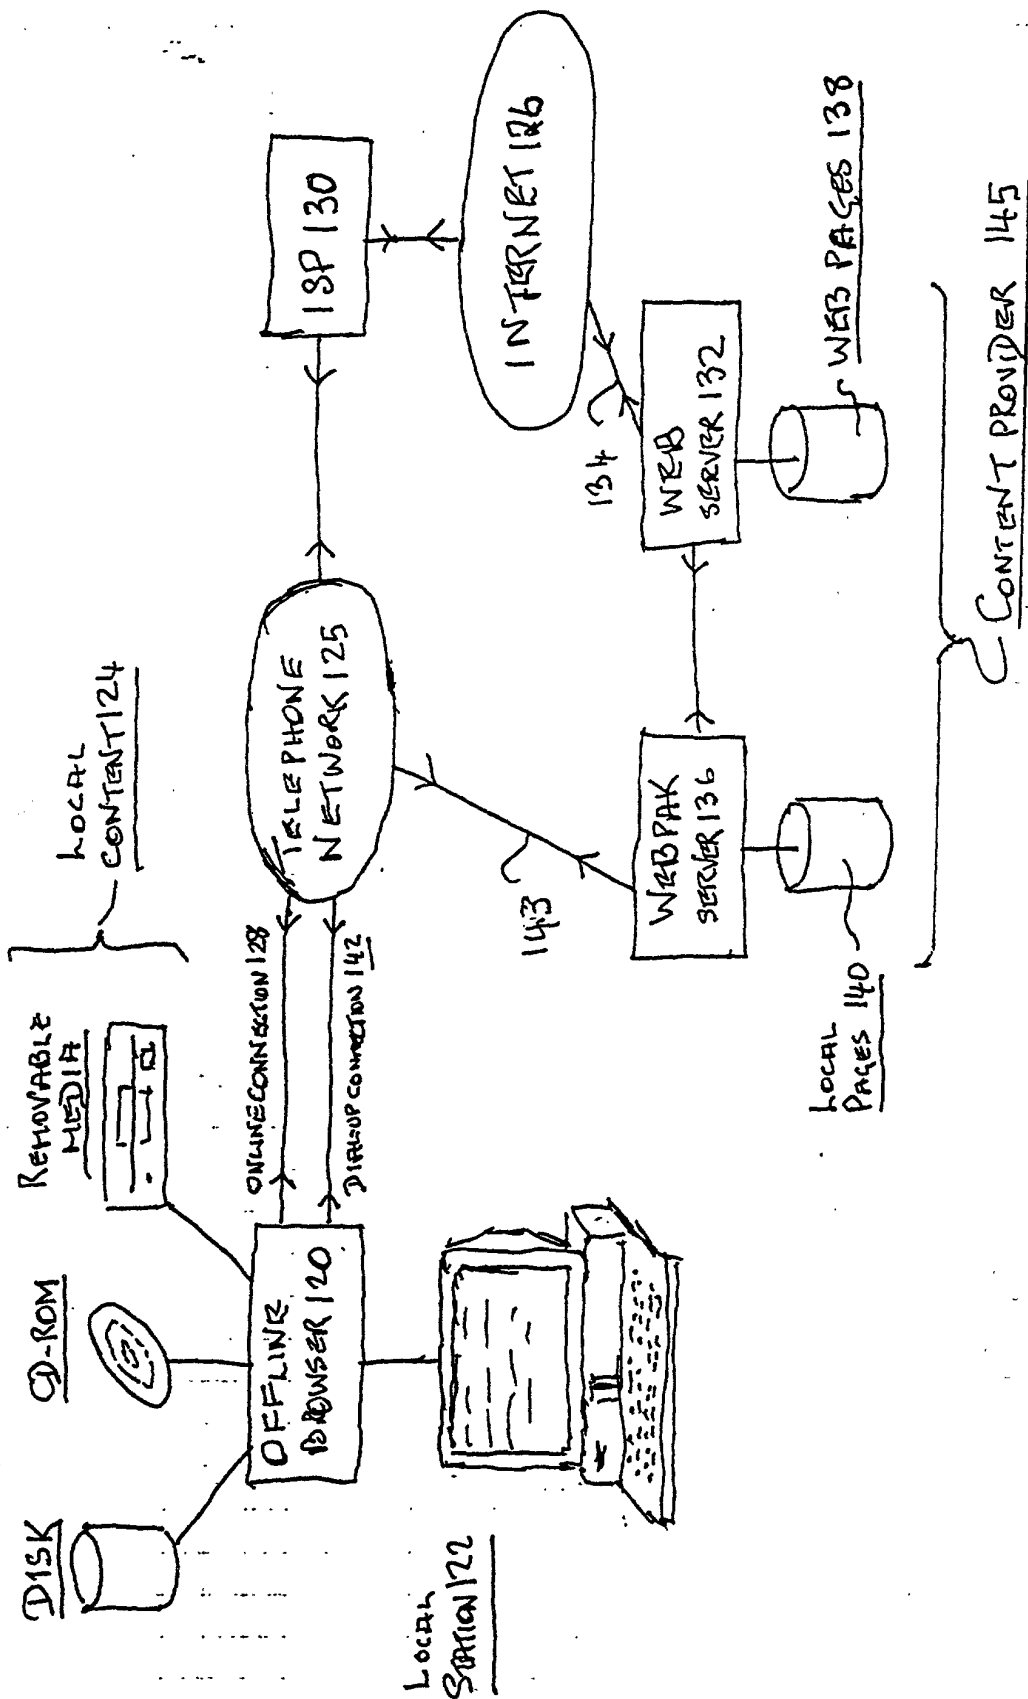


Fig. 12

000240" 2009560

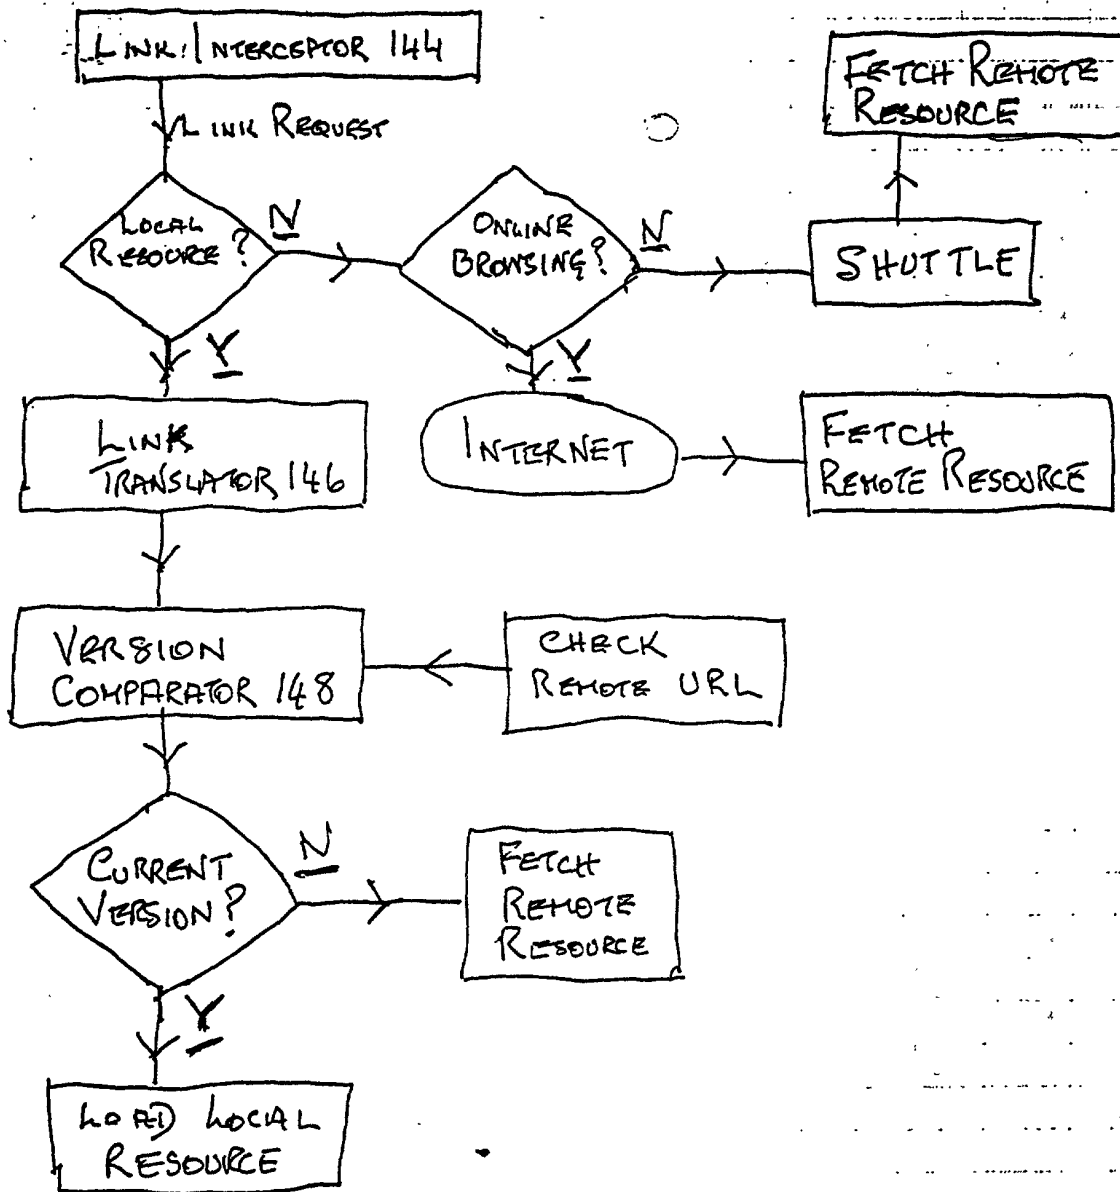


Fig. 13.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)	Attorney Docket Number	RRR-00-007US
	First Named Inventor	Richard R. Reisman
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Group Art Unit	
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing	OR	<input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)
Examiner Name		

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

SOFTWARE AND METHOD FOR AUTOMATICALLY FETCHING DATA FROM A PLURALITY OF INDEPENDENTLY-OPERATED DATA SOURCES

the specification of which (Title of the Invention)

☒ is attached hereto
OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
08/251,724	05/31/1994	5,694,546
08/641,010	04/29/1996	
08/982,157	12/01/1997	

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☒ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number
Robert A. Westerlund	31,439	Bruce G. Bernstein	34,550
Raymond H. J. Powell, Jr.	34,231		
Ramon R. Hoch	34,108		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto


Direct all correspondence to: ☐ Customer Number OR ☒ Correspondence address below

Name	Westerlund & Powell, P.C.		
Address	122 N. Alfred Street		
Address			
City	Alexandria	State	VA
		ZIP	22314-3011
Country	USA	Telephone	(703) 706-5862
		Fax	(703) 706-5860

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])		Family Name or Surname	
Richard R.		REISMAN	
Inventor's Signature			Date 8/14/00
Residence: City	New York	State	NY
		Country	USA
Post Office Address	20 East 9th St., 14K		
Post Office Address			
City	New York	State	NY
		ZIP	10003
		Country	USA

☐ Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto